

(51) International Patent Classification:
H04L 12/18 (2006.01) *H04L 12/56* (2006.01)(21) International Application Number:
PCT/JP2011/077737(22) International Filing Date:
24 November 2011 (24.11.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2010-267699 30 November 2010 (30.11.2010) JP
2011-192542 5 September 2011 (05.09.2011) JP(71) Applicant (for all designated States except US): **RICOH COMPANY, LTD.** [JP/JP]; 3-6, Nakamagome 1-chome, Ohta-ku, Tokyo, 1438555 (JP).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **UMEHARA, Naoki** [JP/JP]; c/o RICOH COMPANY, LTD., 3-6, Nakamagome 1-chome, Ohta-ku, Tokyo, 1438555 (JP). **ASAI, Takahiro**

[JP/JP]; c/o RICOH COMPANY, LTD., 3-6, Nakamagome 1-chome, Ohta-ku, Tokyo, 1438555 (JP).



(74) Agent: **ITOH, Tadahiko**; 32nd Floor, Yebisu Garden Place Tower, 20-3, Ebisu 4-chome, Shibuya-ku, Tokyo, 1506032 (JP).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,

[Continued on next page]

(54) Title: TRANSMISSION MANAGEMENT SYSTEM, TRANSMISSION SYSTEM, PROGRAM FOR TRANSMISSION MANAGEMENT SYSTEM AND COMPUTER READABLE INFORMATION RECORDING MEDIUM

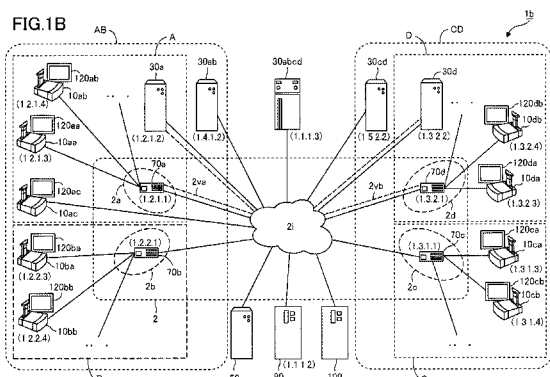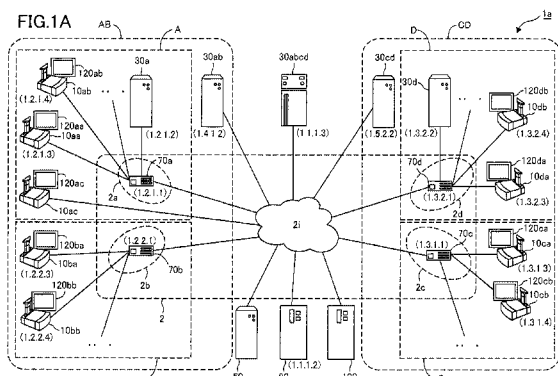

(57) Abstract: A transmission management system, when content data is communicated among plural transmission terminals via a communication network, selects a relay apparatus which relays the content data. The system determines whether first attributes of the respective plural transmission terminals are the same; determines whether second attributes of the respective plural transmission terminals are the same; and selects a first relay apparatus in a case where the first attributes are determined to be the same, selects a second relay apparatus in a case where the first attributes are not determined to be the same but the second attributes are determined to be the same, and selects a third relay apparatus in a case where the first attributes are not determined to be the same and the second attributes are not determined to be the same.



DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, **Published:**

LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE,

SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA,

GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— *with international search report (Art. 21(3))*