



(51) International Patent Classification:

E04H 9/14 (2006.01) *E06B 5/00* (2006.01)
E02B 7/22 (2006.01)

(21) International Application Number:

PCT/SG2014/000544

(22) International Filing Date:

18 November 2014 (18.11.2014)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicant: **PARAFOIL DESIGN & ENGINEERING PTE LTD** [SG/SG]; 1 Yishun Street 23, #07-04, YS-One, Singapore 768441 (SG).

(72) Inventor: **QUEK, Jwee Thiam**; Block 496D, Tampines Avenue 9, #03-530, Singapore 520496 (SG).

(74) Agent: **FOO, Chee Hiong Ricky**; Marks & Clerk Singapore LLP, Tanjong Pagar, P.O. Box 636, Singapore 910816 (SG).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,

BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— of inventorship (*Rule 4.17(iv)*)

Published:

— with international search report (*Art. 21(3)*)

(54) Title: A FLOOD BARRIER

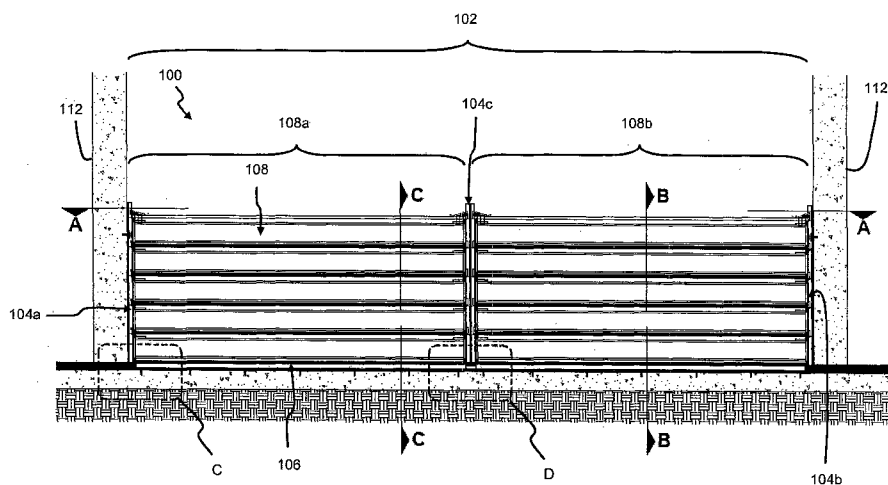


FIG. 1A

(57) Abstract: A flood barrier (100) is disclosed, which comprises at least two supporting posts (104a, 104b) for positioning at an entrance (102) of a building; and at least one panel (108) removably arranged intermediate a pair of the supporting posts to form the flood barrier, wherein the panel includes a plurality of seals having corrugated surfaces to interface with the supporting posts to provide a water-tight arrangement against entry of flood waters into the building. A method of operating said flood barrier is also disclosed.