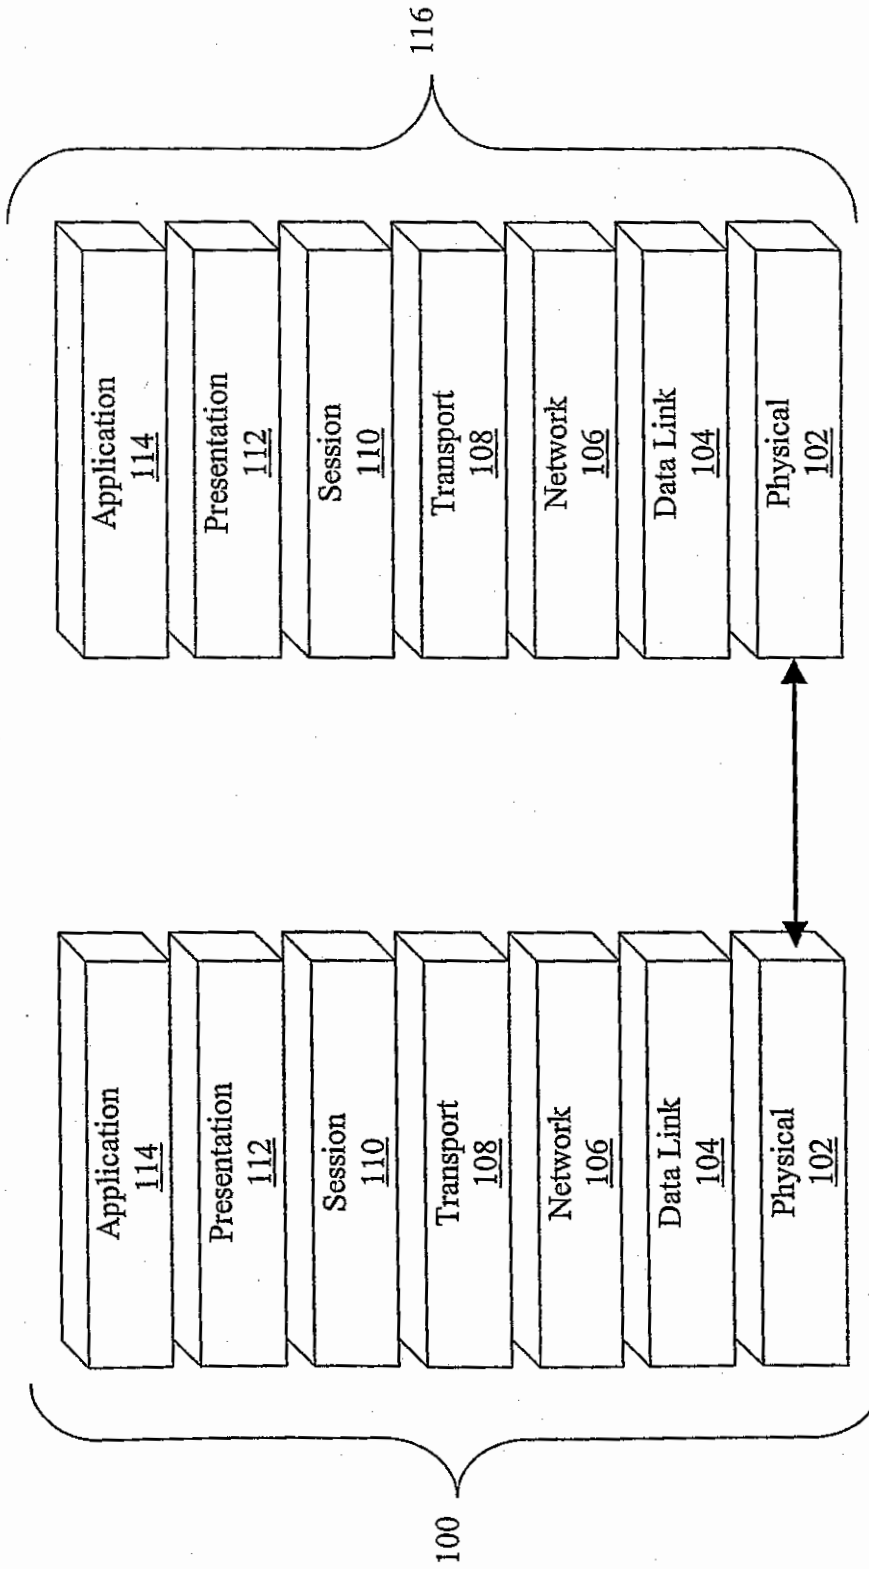

116
Application 114
Presentation 112
Session 110
Transport 108
Network 106
Data Link 104
Physical 102
Application 114
Presentation 112
Session 110
Transport 108
Network 106
Data Link 104
Physical 102
100

Fig. 1

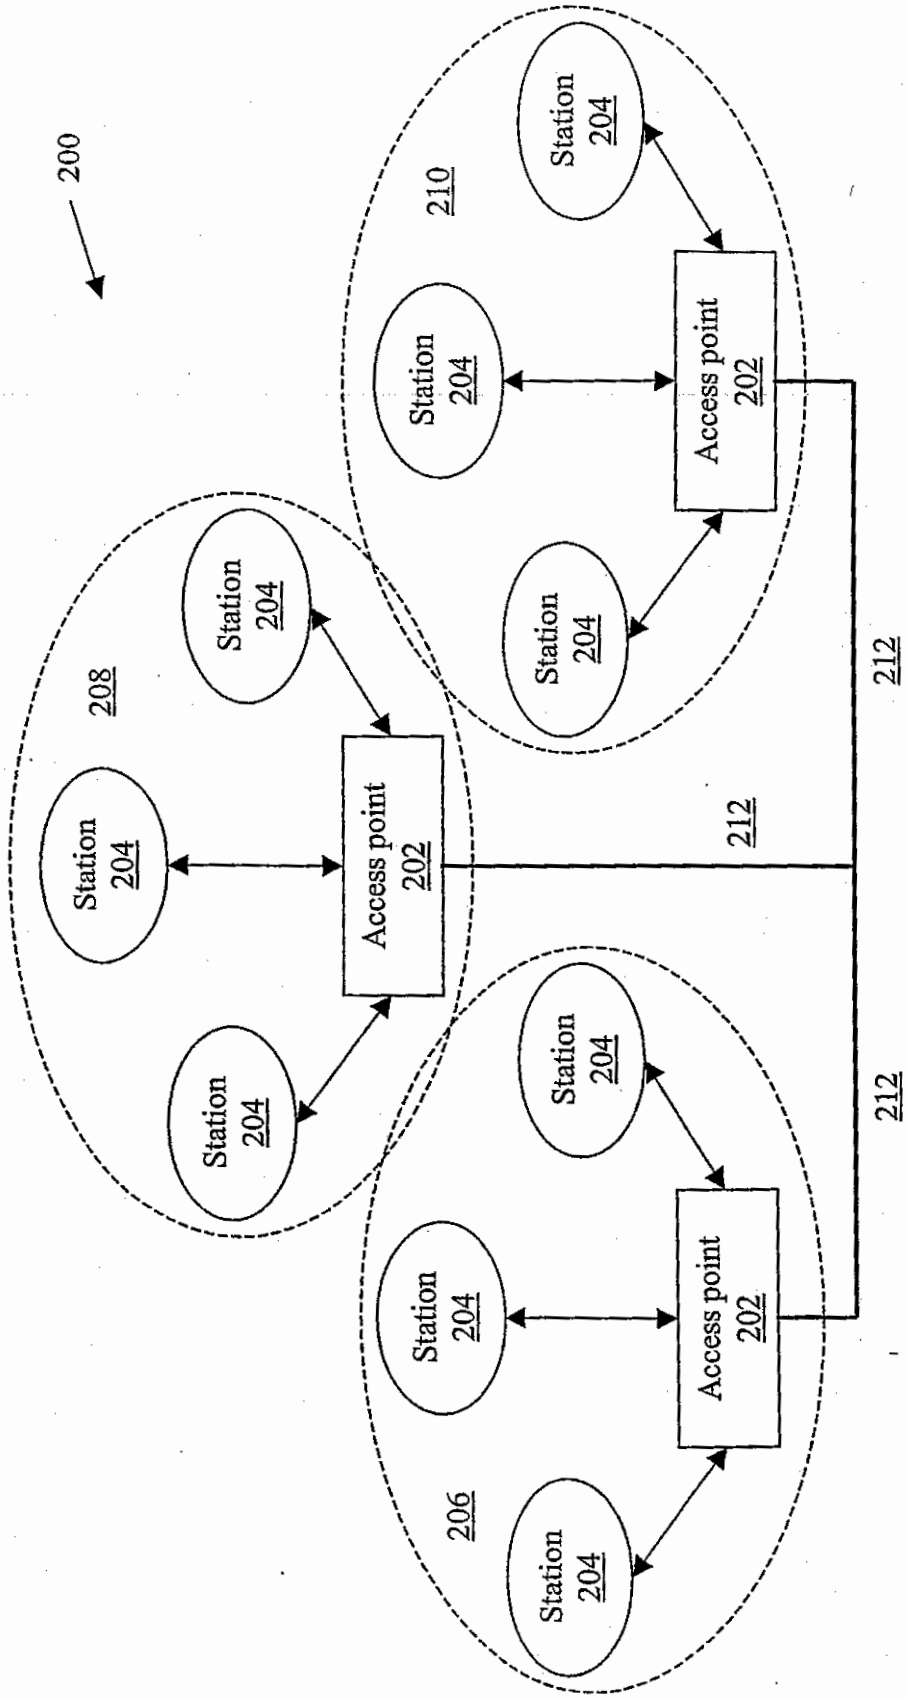

200
208
Station 204
Station 204
Station 204
Access point 202
210
Station 204
Station 204
Station 204
Access point 202
206
Station 204
Station 204
Station 204
Access point 202
212
212
212

Fig. 2

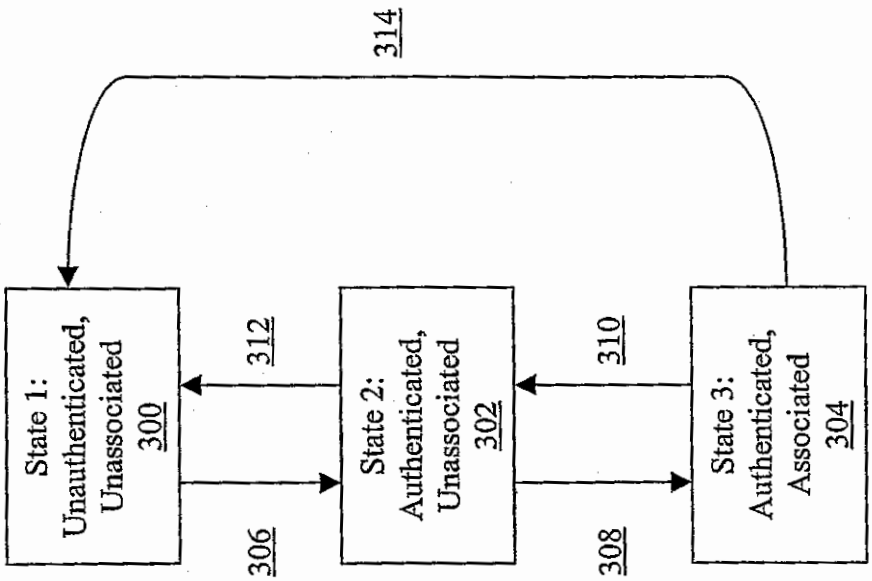

314
State 1:
Unauthenticated,
Unassociated
300
312
State 2:
Authenticated,
Unassociated
302
310
State 3:
Authenticated,
Associated
304
306
308

Fig. 3

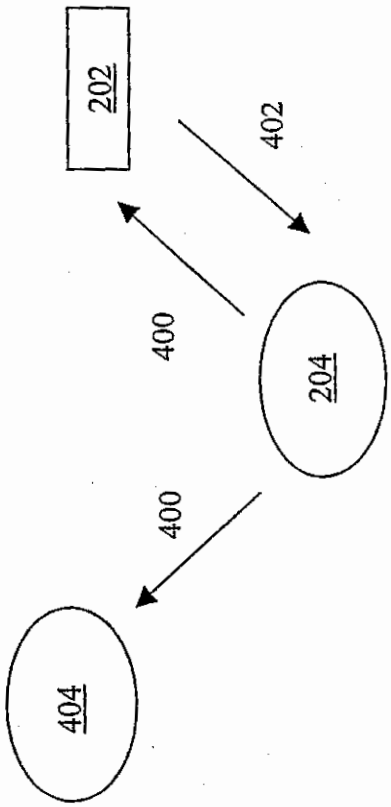


Fig. 4

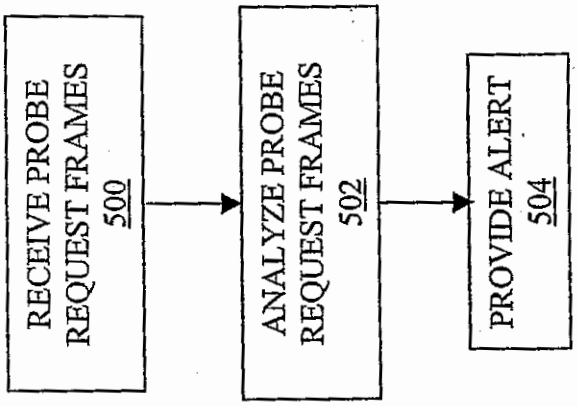

RECEIVE PROBE REQUEST FRAMES
500
ANALYZE PROBE REQUEST FRAMES
502
PROVIDE ALERT
504

Fig. 5

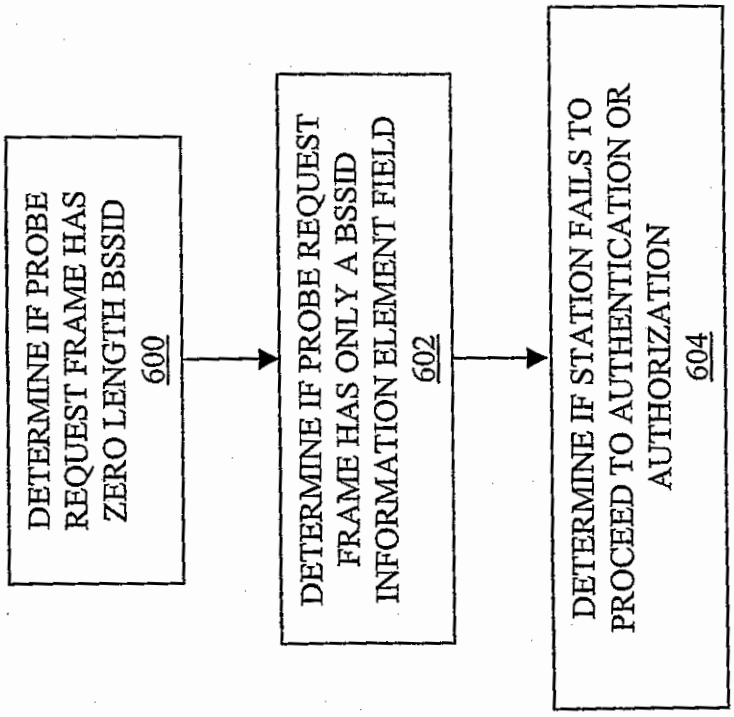

DETERMINE IF PROBE REQUEST FRAME HAS ZERO LENGTH BSSID
600
DETERMINE IF PROBE REQUEST FRAME HAS ONLY A BSSID INFORMATION ELEMENT FIELD
602
DETERMINE IF STATION FAILS TO PROCEED TO AUTHENTICATION OR AUTHORIZATION
604

Fig. 6