

(19) World Intellectual Property
Organization
International Bureau



WIPO | PCT



(10) International Publication Number
WO 2020/154758 A9

(43) International Publication Date
06 August 2020 (06.08.2020)

(51) International Patent Classification:

A63G 31/02 (2006.01) G09B 9/02 (2006.01)
A63G 31/16 (2006.01)

(21) International Application Number:

PCT/AU2020/000010

(22) International Filing Date:

31 January 2020 (31.01.2020)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2019900285 31 January 2019 (31.01.2019) AU

(71) Applicant: ASSURED IT PTY LTD [AU/AU]; U6, 95
Riverside Place, Morningside, QLD 4170 (AU).

(72) Inventors: SMITH, Alan; 21/60 Prospect Road,
Gaythorne, QLD 4051 (AU). KINCHINGTON, Justin;
PO Box 792, Morningside, QLD 4170 (AU).

(74) Agent: EAGAR & ASSOCIATES PTY LTD; Suite 2,
35-39 Scarborough Street, Southport, QLD 4215 (AU).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,
KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,

(54) Title: A MOTION SIMULATION APPARATUS

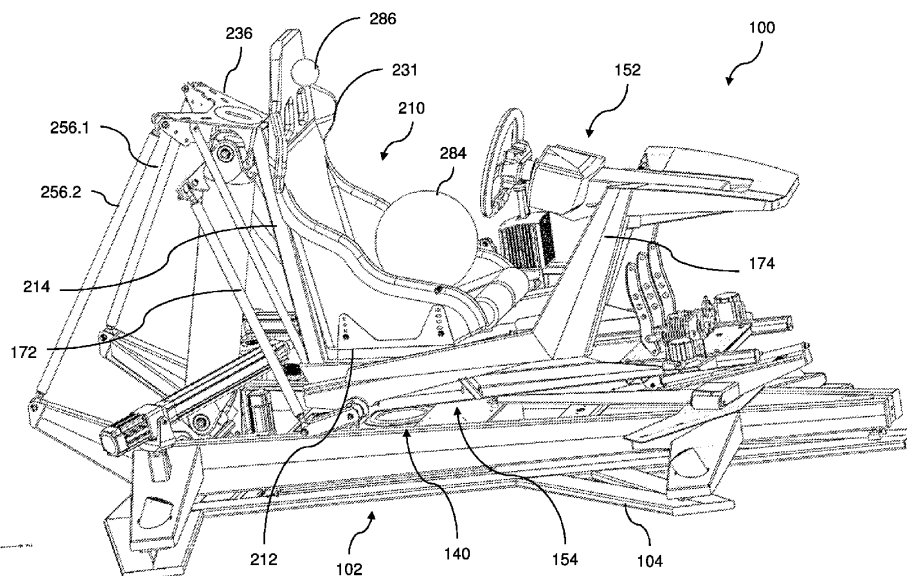


Figure 7

(57) Abstract: A motion simulation apparatus includes a motion platform. A carrier for carrying a user is mounted on the motion platform. The apparatus has a drive arm with a lower end that is pivotally mounted on a substrate to pivot relative to the substrate with two degrees of freedom of movement and an upper end that is pivotally connected to the motion platform to pivot with respect to the motion platform with two degrees of freedom of movement. The apparatus has two guide arms, each guide arm having a lower end that is pivotally mounted on the substrate to pivot relative to the substrate with three degrees of freedom of movement and an upper end that is pivotally connected to the motion platform to pivot relative to the motion platform with three degrees of freedom of movement. The drive arm, the guide arms and the motion platform define a dynamic frame that can pivot with respect to the substrate such that a resultant movement of the motion platform can be imparted to the carrier.

[Continued on next page]

MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(48) Date of publication of this corrected version:

04 August 2022 (04.08.2022)

(15) Information about Correction:

see Notice of 04 August 2022 (04.08.2022)