

(12) 特許協力条約に基づいて公開された国際出願

(19) 世界知的所有権機関
国際事務局



(43) 国際公開日
2011 年 6 月 16 日(16.06.2011)


(10) 国際公開番号
WO 2011/070861 A1

- (51) 国際特許分類:
B61B 13/00 (2006.01) *B60M 7/00* (2006.01)
B60L 5/00 (2006.01)
- (21) 国際出願番号: PCT/JP2010/068722
- (22) 国際出願日: 2010 年 10 月 22 日(22.10.2010)
- (25) 国際出願の言語: 日本語
- (26) 国際公開の言語: 日本語
- (30) 優先権データ:
特願 2009-277732 2009 年 12 月 7 日(07.12.2009) JP
- (71) 出願人 (米国を除く全ての指定国について): 株式会社ダイフク (DAIFUKU CO., LTD.) [JP/JP]; 〒5550012 大阪府大阪市西淀川区御幣島三丁目 2 番 1 1 号 Osaka (JP).
- (72) 発明者; および
- (75) 発明者/出願人 (米国についてのみ): 乾吉隆(INUI Yoshitaka) [JP/JP]; 〒5291692 滋賀県蒲生郡日野町 中在寺 1 2 2 5 株式会社ダイフク 滋賀事業所内 Shiga (JP).
- (74) 代理人: 北村修一郎 (KITAMURA Shuichiro); 〒5300005 大阪府大阪市北区中之島三丁目 3 番 3 号 Osaka (JP).
- (81) 指定国 (表示のない限り、全ての種類の国内保護が可能): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) 指定国 (表示のない限り、全ての種類の広域保護が可能): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), ユーラシア (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), ヨーロッパ (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI

[続葉有]

(54) Title: ITEM CONVEYANCE INFRASTRUCTURE

(54) 発明の名称: 物品搬送設備

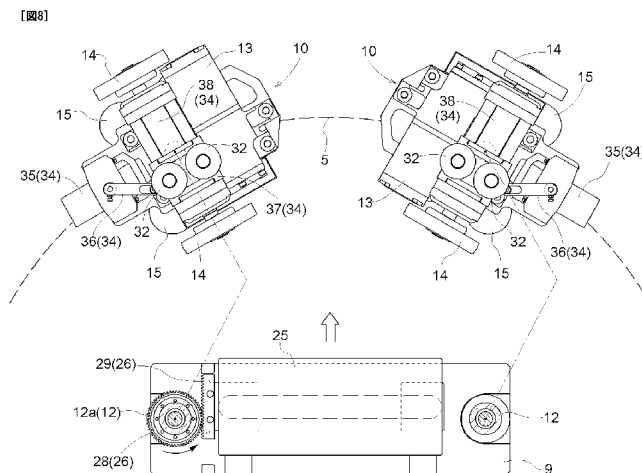

(57) Abstract: Disclosed is an item conveyance infrastructure capable of supplying power from a power supply line to a power receiving unit in an appropriate manner without installing a power receiving unit upon a connecting shaft, and even in curved portions of set travel paths. The travel rail (1) and the power supply line are disposed to extend in line with a set travel path that combines straight portions and curved portions (5), and an item conveyance vehicle comprises travel units (10) further comprising guide wheels (15) that make contact with the travel rail (1) and are guided in the horizontal direction and travel wheels (14) that make contact with the travel rail and are driven rotationally. The travel units (10) are linked by linking shafts (12) upon a chassis main body (9) to rotate freely about vertical axes, the power receiving unit (25) is supported upon the chassis main body (9) to move freely in the horizontal direction of the item conveyance vehicle, and the item conveyance vehicle further comprises a power receiving unit moving means (26) for moving the power receiving unit (25) to the exterior side of the curved portions (5) in the horizontal direction of the item conveyance vehicle in line with the rotations of the linking shafts (12) when the travel units (10) rotate about the vertical axes with respect to the chassis main body (9) as the item conveyance vehicle travels over the curved portions (5).

(57) 要約:

[続葉有]

WO 2011/070861 A1