

(43) International Publication Date
26 June 2025 (26.06.2025)



(10) International Publication Number
WO 2025/132566 A1

(51) International Patent Classification:

G01N 21/05 (2006.01) *G01N 35/10* (2006.01)
G01N 21/11 (2006.01) *G01N 21/65* (2006.01)
G01N 21/85 (2006.01)

(21) International Application Number:

PCT/EP2024/087076

(22) International Filing Date:

18 December 2024 (18.12.2024)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

23219488.6 21 December 2023 (21.12.2023) EP

(71) Applicant: **BOEHRINGER INGELHEIM INTER-**

NATIONAL GMBH [DE/DE]; Global Patents, Binger
Strasse 173, 55216 Ingelheim am Rhein (DE).

(72) **Inventors:** CHEN, Jingyi; Boehringer Ingelheim Interna-

tional GmbH, Global Patents, Binger Strasse 173, 55216

Ingelheim am Rhein (DE). **SCHUCK, Elmar**; Boehringer Ingelheim International GmbH, Global Patents, Binger Strasse 173, 55216 Ingelheim am Rhein (DE). **WANG, Jiarui**; Boehringer Ingelheim International GmbH, Global Patents, Binger Strasse 173, 55216 Ingelheim am Rhein (DE).

(74) **Agent: VON ROHR PATENTANWÄLTE PART-
NERSCHAFT MBB**; Rüttenscheider Straße 62, 45130 Es-
sen (DE).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, MG, MK, MN, MU, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH,

(54) Title: MEASURING ARRANGEMENT AND METHOD FOR ANALYZING A FLUIDIC SAMPLE

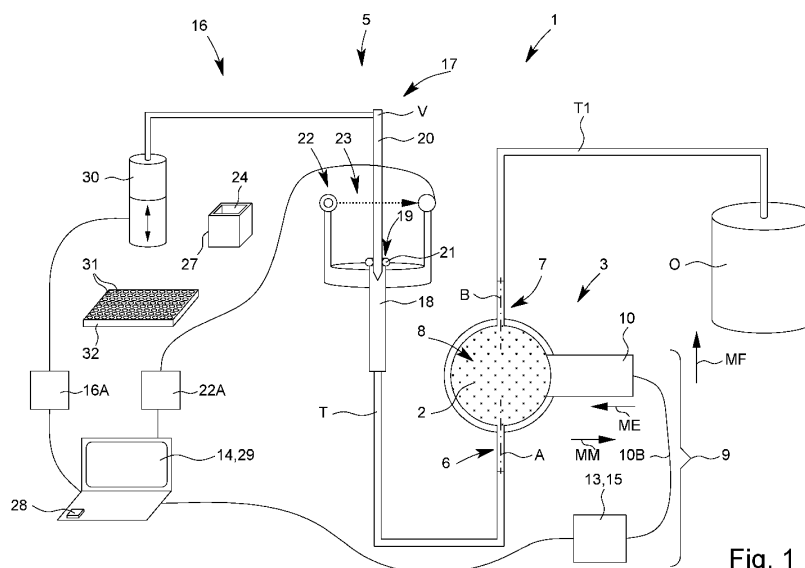


Fig. 1

(57) Abstract: The present invention relates to a measuring arrangement with a flow cell. The flow cell is arranged in such a way that the fluidic sample flows from bottom to top through the flow cell. The fluidic sample flows through the flow cell within a residence time which is greater than 1 second. Additionally or alternatively, the measuring arrangement comprises a pumping device to pump the fluid forwards and backwards through the flow cell during measurement. It is possible to reduce and/or prevent air bubbles in the flow cell. In this way it is possible to reduce and/or prevent the negative influence of gas bubbles on the measurement.

[Continued on next page]

WO 2025/132566 A1

TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS,
ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, CV, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SC, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, ME, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*
- *in black and white; the international application as filed contained color or greyscale and is available for download from PATENTSCOPE*