

(51) International Patent Classification:
H02B 13/02 (2006.01)(21) International Application Number:
PCT/EP2010/006258(22) International Filing Date:
13 October 2010 (13.10.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09012900.8 13 October 2009 (13.10.2009) EP(71) Applicant (for all designated States except US): **ABB Technology AG** [CH/CH]; Affolternstrasse 44, CH-8050 Zürich (CH).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **MILDES, Hartmut** [DE/DE]; Bergstr. 29, 40878 Ratingen (DE).(74) Agent: **SCHMIDT, Karl-Michael**; c/o ABB AG/GF-IP, Oberhausener Strasse 33, 40472 Ratingen (DE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).



Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

Published:

— with international search report (Art. 21(3))

(54) Title: MEDIUM VOLTAGE SWITCHGEAR

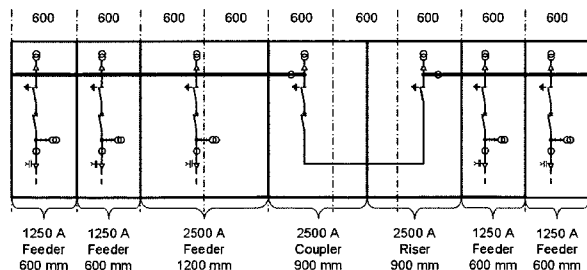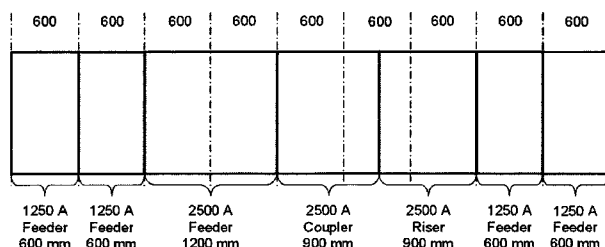

(57) Abstract: The invention relates to a medium voltage switchgear, e.g. gas insulated switchgear, which consist of an arrangement of several switching device panels, like feeder panel, coupler panel and riser panel, each with a separate compartment and further interconnecting means between the compartments. In order to unify the measure system in a comfortable way, for easy construction and assembly, the invention is, that each panel width is dimensioned to a fix base measure x or integer multiples n*x of it.