

MCH-US-64.-

PROCESS FOR THE PRODUCTION OF REFLECTIVE ELEMENTS OF A LIGHT
AND LIGHTS OBTAINED ACCORDING TO THIS PROCESS

The present invention relates to a process for the production of the profile of reflective elements of a light adapted to illuminate a target surface with substantially any desired illumination profile. The present invention relates also to reflectors produced according to such a process.

There are known different types of reflectors for lights whose profiles are such as to permit obtaining, on a target surface, from cylindrical light sources or concentrated flat light sources, an illumination profile, or illumination curve, which one would wish to be constant overall but which, for various reasons only very rarely achieves an illumination uniformity of about 80%.

These lights have substantial drawbacks. On the one hand, they are not able to illuminate a target surface with any desired lighting profile, and on the other hand, the hardly uniform lighting which they supply is obtained only over a relatively reduced surface.

The present invention has for its object to provide means permitting producing a light which, from an extended light source, supplies over a spaced target surface a lighting curve of practically any profile and particularly a constant



illumination, and this without increasing substantially the size.

The present invention thus has for its object a process for the production of the profile of reflective elements of a light constituted by a flat light source symmetrical relative to a plane, of at least two cylindrical reflective elements, each point of the profile being defined by the length (r) of the segment representing the distance of the end of the cross section of said light source, located beside said reflective element, to said point, and by the angle (ϕ) formed by the vertical with said segment, the light beams from the light source forming, at the output of the light, respective angles (θ) with said plane, characterized in that it comprises the steps consisting:

- in defining the position of one end of the profile of each reflective element, from on the one hand a desired distance (r_0) separating said end from the end of the cross section of said light source situated on the side of said reflective element and, on the other hand, from an angle over which one desires to see the width (s) of said light source from the end of said profile,

- in defining an illumination function $E(\theta)$ corresponding to a desired lighting profile, associated with a luminance $L(\theta)$ by the formula:

$$E(\theta) = L(\theta) \cdot \cos^2 \theta = k[(s \cdot \cos \theta + pr \cdot \sin(\phi - \theta) - pr_0 \cdot \sin(\phi_0 - \theta)] \cos^2 \theta$$



if said end of the profile of the reflective element is the downstream end of the latter, and an illumination function:

$$E(\theta) = L(\theta) \cdot \cos^2 \theta = k[(s \cdot \cos \theta - \rho r \cdot \sin(\phi - \theta) + \rho r_0 \cdot \sin(\phi_0 - \theta)] \cos^2 \theta$$

5 if said end is the upstream end of said profile, in which $k = L(0)/s$

- in determining, from said end, the coordinates of each of the points of said profile of each reflective element satisfying the differential equation:

10 $d\alpha/d\theta = \sin \alpha \cdot \cos \alpha [d \log p(\theta)/d\theta] - \sin^2 \alpha$, in which the function $p(\theta)$ is equal to $\rho r \cdot \sin(\phi - \theta)$ and the value of the angle α is equal to $(\phi - \theta)/r$.

In one embodiment of practicing the invention, said flat light source is constituted by a virtual image obtained from a cylindrical light source of circular cross section and from a primary reflector having the developed shape of a circle.

15 The present invention also has for its object a light constituted by a flat light source, symmetrical relative to a plane, and by at least two cylindrical reflective elements, each point of the profile of a reflective element being defined by the length (r) of the segment representing the distance from the extremity of the cross section of said light source, located beside said reflective element, to said point, and by the angle (ϕ) formed by the vertical with said segment, in which the light beams from the flat light source form, at the output of the light, respective angles (θ) with

This Sheet Has Been Replaced



said plane, characterized in that an end of said profile of said reflective element is positioned at a desired distance (r_0) from said end (0) of the cross section of said light source, such that, from this end, the width (s) of said light source will be seen under a desired angle, the coordinates of each of the points of the profile of each of the reflective elements are defined from a given illumination function $E(\theta)$ determined by a desired lighting curve, connected to a luminance function $L(\theta)$ by the relationship:

$$E(\theta) = L(\theta) \cdot \cos^2 \theta = k[(s \cdot \cos \theta + pr \cdot \sin(\phi - \theta) - pr_0 \cdot \sin(\phi_0 - \theta)] \cos^2 \theta$$

if said end of the profile of the reflective element is the downstream end of this latter, and an illumination function:

$$E(\theta) = L(\theta) \cdot \cos^2 \theta = k[(s \cdot \cos \theta - pr \cdot \sin(\phi - \theta) + pr_0 \cdot \sin(\phi_0 - \theta)] \cos^2 \theta$$

if said end is the upstream end of said profile, wherein $k = L(0)/s$ and satisfying the differential equation: $d\alpha/d\theta = \sin \alpha \cdot \cos \alpha [d \log p(\theta)/d\theta] - \sin^2 \alpha$, in which the function $p(\theta)$ is equal to $pr \cdot \sin(\phi - \theta)$ and the value of the angle α is equal to $(\phi - \theta)/r$.

The present invention thus permits controlling the illumination supplied to a target surface. Such illumination could be symmetrical or not relative to the plane of symmetry of the light source, the profiles of the reflective elements of a same light being adapted for this purpose to have different shapes.

The present invention is particularly interesting in the case in which the target surface must be illuminated in a



uniform fashion by several adjacent lights whose end illuminations must overlap with a good tolerance permitting easy positioning of the lights.

5 The present invention uses flat light sources. However, in practice, there are mostly available light sources having the shape of cylinders of revolution such as, for example, those constituted by fluorescent tubes. The present invention permits using such sources with the light according to the invention because it is known that any convex source
10 can be replaced, as to optics, by an equivalent flat source if it is coupled with a specular reflector in the developed shape of a circle.

In such an embodiment of practice, the present invention permits distancing the cylindrical light source from
15 the internal surface of the specular reflector, while preserving the desired illumination profile, by introducing into the illumination function $E(\theta)$ an illumination correction function $F_c(\theta)$. One can thus protect the reflector from heat given off by the light source.

20 There will be described hereafter, by way of non-limiting example, an embodiment of the present invention, referring to the accompanying drawing, in which:

Figure 1 is a schematic view showing a light of the type of that of the invention, illuminating a target surface.

25 Figure 2 is a graph representing the lighting profile, or illumination curve, taken in cross section on a light according to the invention.



Figure 3 is a cross-sectional view, on a larger scale, of a light according to the invention.

Figure 4 is a view in cross section, on a larger scale, of an embodiment of practicing the invention.

5 Figure 5a is a cross-sectional view, on an enlarged scale, of a modification of the mode of practicing the invention shown in Figure 4.

10 Figure 5b is a graph representing the illumination curve delivered by a cross section of a light according to the invention.

Figure 6 is a cross-sectional view on a larger scale showing a modified embodiment of the device according to the invention.

15 Figure 7 is a schematic view showing the illumination curve produced by a light according to the invention.

Figure 8 is a view on a larger scale of a cross section of a light according to the invention adapted to reproduce the illumination curve shown in Figure 7.

20 Figure 9 is a cross-sectional view, on a larger scale, of an embodiment of the invention.

25 There is shown in Figures 1 to 3 a light 1 constituted by a flat light source 3 and two cylindrical reflective elements 5 and 5' whose cross sections, or profiles, are symmetrical relative to the plane of symmetry (P) of the source 3. This light 1 is adapted to illuminate a target surface 7, disposed at a distance h from the light source 3, this distance being considered as increased relative to the



width s of the source 3, which is to say that it is of the order of at least ten times that latter.

5 The light 1 is adapted to illuminate the target surface 7 with an illumination curve shown in Figure 2. This illumination curve, which represents the value of illumination delivered to the target surface 7 across its transverse dimension, is constituted by a central plateau 9 between two lateral downwardly outwardly inclined legs 11g and 11d. This illumination curve shows that the target surface 7 will be
10 illuminated in a uniform manner between the points C' and C and that on opposite sides of the latter the illumination diminishes progressively to become zero at end points M' and M. Although there is shown in the diagram of Figure 2 only a single cross section of the light 1 and of the target surface
15 7, these latter will be identical in any other cross section.

As shown in Figure 2, the legs 11g and 11d permit easily associating two adjacent lights, so as to produce an overall illumination equal to the sum of the illumination supplied by each of the lights, which is constant over the
20 target surface 7.

Of course the reflective elements according to the process and device of the invention permit producing a light adapted to reproduce, between the points C and C', any other illumination curve.

25 A first step of the process according to the invention consists in determining the coordinates of an end edge Ro of each of the reflective elements 5 and 5' and in the

This Sheet Has Been Replaced



present case there will be chosen the downstream edge. In practice, the position of this latter will depend essentially on two parameters, namely the angle γ under which, from the point R_o , it is desired to see the width s of the light source 3, and the distance r_o separating the point R_o from the end O of the light source 3 nearest the reflective element in question. Preferably, the angle γ will be greater than the angles θ_c and $\theta_{c'}$ under which will be seen, from the center of the light 1, the end points C and C' of the target surface 7 between which it is desired to control the light curve.

The applicant has established that the angle ϕ_o formed by the vertical with the straight line joining the point O to the point R_o was defined by the formula:

$$\phi_o = 180^\circ - \text{Arc sin} (\cos \gamma \sqrt{1 - [r_o \sin \gamma / s]^2}) - (r_o / s) \sin^2 \gamma$$

According to the invention, once the downstream end R_o of the profile of the cross section of the reflective element 5 is determined, the construction can be ensured point by point by passing toward the upstream end of said profile namely by following the curve Roz .

This construction is produced by introducing, for each point R, the characteristic of the desired illumination curve, according to an equation defined hereinafter.

In the particular case of the example selected for Figures 1 to 3, the illumination received by the target surface 7 is constant for each of its points comprised between C and C'. Each of these points can be defined by the beams

This Sheet Has Been Replaced



from the center of the light and bordering on this point and forming with the vertical an angle θ .

The illumination curve of the target surface 7 is thus defined between the end angles $\theta_{c'}$ and θ_c corresponding to the end points C' and C of the target surface 7. The luminance $L(\theta)$ supplied to a point on the target surface 7 corresponding to a given angle θ is equal to the incident luminance $L(\theta)_i$ from the beams emitted directly from the light source 3 without being subjected to reflection on the reflective element 5, added to the reflected luminance $L(\theta)_r$ from the beams transmitted after reflection ($L(\theta) = L(\theta)_i + L(\theta)_r$).

In Figure 3, this luminance $L(\theta)$ is proportional to the sum of the distance $e = DE = s \cdot \cos \theta$ and of the distance $e' = FG = r \cdot \sin(\phi - \theta) - r_0 \cdot \sin(\phi_0 - \theta)$, so that the luminance at a given point on the target surface of angle θ is:

$$L(\theta) = k(e + e') = k[s \cos \theta + \rho \cdot r \sin(\phi - \theta) - \rho r_0 \cdot \sin(\phi_0 - \theta)]$$

in which ρ is a constant characteristic of the coefficient of reflectivity of the surface of the light, related to the nature of this latter and its surface condition.

The constant k can be expressed as being equal to the luminance $L(\theta)$ supplied by beams parallel to the plane of symmetry P of the light 1 in which $\theta = 0$. Thereafter:

$$k = L(0)/s$$

As to the illumination $E(\theta)$ received at a point on the target comprised between the end points C and C' and

This Sheet Has Been Replaced



forming an angle θ with the plane of symmetry P of the light,
this is equal to:

$$E(\theta) = L(\theta) \cdot \cos^2 \theta$$

5 In the case of a uniform illumination profile and
for a spaced source, as mentioned previously, the illumination
 $E(\theta)$ becomes: $E(\theta) = L(\theta) \cdot \cos^2 \theta = \text{cste}$
namely

$$L(\theta) = \text{cste} / \cos^2 \theta = L(0) / s \cdot (s \cos \theta + p_r \sin(\phi - \theta) - p_{r_0} (\sin \phi_0 - \theta))$$

$$\text{Given that } p(\theta) = p_r \sin(\phi - \theta) \text{ and } \phi = 2\alpha + \theta$$

10 one derives the following differential equation:

$$d\alpha/d\theta = \sin \alpha \cdot \cos \alpha [d \log p(\theta)/d\theta] - \sin^2 \alpha$$

Such a first order differential equation can be
solved by giving a limit condition according to which a beam
from the end O of the light source 3 nearest the reflective
15 element 5, is reflected at Ro along a vertical, so that at
this point $\theta = 0$.

Suitable computation means thus permit computing
each of the successive points of the reflective element 5 and
hence tracing, preferably by automated means, the profile Roz
20 of this latter. Obviously, the reflective element 5' will be
constructed symmetrically.

As mentioned above, the present invention permits
obtaining illumination curves of substantially any appearance.

25 There can for example thus be designed a light whose
profile of the reflective elements will be such that the
illumination falling on the target surface will be at each

This Sheet Has Been Replaced



point proportional to the tangent of the angle θ formed by this point with the center of the light.

In such an arrangement, the illumination curve is defined by the equation: $E(\theta) = E(0) \cdot (1 + \tan \theta)$ which is valid
5 between two end points C and C'.

There is respectively shown in Figures 7 and 8 such an illumination curve and the cross section of each of the reflective elements 5 and 5'.

In most of the possible uses of the invention, the
10 light sources will not be flat sources but sources in the form of a cylinder of revolution, such as fluorescent tubes and the like. It is known optically that an equivalent of a flat source can be a cylindrical light source by providing the latter with a cylindrical reflector whose developed profile is
15 a circle.

There is thus shown in Figure 4 the cross section of a light, used according to the invention, and which is constituted by cylindrical elements. This light is comprised of a light source constituted by a cylindrical luminescent tube 4,
20 a reflector 17 called a primary reflector, whose cross section is in the form of a developed circle, and two reflective elements 5, 5' which are symmetrical relative to the plane of symmetry P of the light source 4. The primary reflector 17 gives from the cylindrical light source 4 a rectangular image
25 of width OO' , which plays the role of a virtual light source relative to the reflective elements 5, 5'. Thereafter the

This Sheet Has Been Replaced



construction of the reflective elements 5, 5' takes place as described above.

A drawback of this type of light is that the primary reflector 17, having the developed shape of a circle, increases substantially the height of the light. Means permitting reducing this size consists in truncating the base of the primary reflector 17, as shown in Figure 5a, which permits displacing in an upstream direction (that is toward the top in the drawing) the downstream ends Ro of the reflective elements 5, 5'.

Tests carried out by the applicant have established that the best results are obtained when there is effected a truncation of each of the elements of circular development with a straight line forming, with the perpendicular xx' to the plane of symmetry P of the light, an angle β of about 20° . The point of intersection of this straight line with the profile of circular development of the primary reflector 17 gives an end O to the virtual light source. From this point O one thus proceeds as previously indicated to determine the downstream end Ro of the profile of the reflective element 5.

It is moreover known that even if the fluorescent tubes do not ordinarily produce large quantities of heat, it is however sometimes necessary to space them from the reflectors, so as to avoid their deterioration under the effect of heat. When such a displacement is effected, the image 3' of the light source 4, playing the role of a virtual light source relative to the reflective elements 5, 5', is in that case not

This Sheet Has Been Replaced



strictly isotropic, so that the resulting illumination curve distributed over the target surface 7 will be accordingly modified.

There is thus shown in Figure 6 such a modification of the practice of the invention in which the external surface of a fluorescent tube 4 is spaced by a distance d from the bottom of the primary reflector 17. There is shown in dotted line on Figure 5b the illumination curve supplied by such a light over the spaced target surface 7. It will be seen that in lieu of obtaining the desired profile, which is to say an illumination profile comprising a central plateau constituted by a straight line CC', there is obtained a curve CDC' whose concavity is directed upwardly.

The present invention permits acting on the shape of the reflective elements 5 and 5' to give them a correction returning the illumination curve to the desired straight line. To do this, there is introduced a new function, a so-called correction function $F_c(\theta)$, representing for each of the angles θ a correction factor to be given to the illumination function $L(\theta)$. At each of the points the correction factor $F_c(\theta)$ is equal to the ratio of the luminance which it is desired to obtain, to the obtained luminance (which it is desired to correct) $F_c(\theta) = HK/IK$. There is thus obtained a new function $L'(\theta)$ from which there is established as before a differential equation of the type of the preceding equation which defines the profile of each of the reflective elements 5, 5'.



Such a modification of the invention could of course be practiced with illumination curves other than linear.

One could also combine two different modes of embodiment of the invention, so as to provide particularly a light adapted, from a cylindrical or non-cylindrical light source in contact with the primary truncated reflector, on a target surface spaced from said source, an illumination curve of substantially any shape.

Although in the preceding examples the profile of the cross section of a reflective element has been formed beginning by determining its downstream end R_o , one could also of course proceed in the reverse fashion.

There is thus shown in Figure 9 a light constituted by a light source $3'$ and two reflective elements 5 and $5'$ whose upstream ends R_o of the profiles are determined as before by the values r_o of the distance of R_o to the end O of the cross section of the light source $3'$, and by the angle γ from which will be seen, from the end R_o , the cross section s of the light source 3 .

In this embodiment the illumination of the target surface is thus:

$$E(\theta) = L(\theta) \cdot \cos^2 \theta = k[s \cdot \cos \theta - pr \cdot \sin(\phi - \theta) + pr_o \cdot \sin(\phi_o - \theta)]$$

This Sheet Has Been Replaced



CLAIMS

1. - Process for the production of the profile of reflective elements of a light constituted by a flat light source (3, 3') symmetrical relative to a plane (P), of at least two cylindrical reflective elements (5, 5') each point (R) of said profile being defined by the length (r) of the segment (RO) representing the distance from the end (0) of the cross section of said light source (3, 3'), located on the side of said reflective element (5, 5'), to said point (R), and by the angle (ϕ) formed by the vertical with said segment (RO), the light beams from the light source (3, 3') forming, at the output of the light, respective angles (θ) with said plane (P), characterized in that it comprises the steps consisting of:

- defining the position of one end (R_0) of the profile of each reflective element (5, 5'), from on the one hand a desired distance (r_0) separating said end (R_0) of the end (0) of the cross section of said light source (3, 3') located on the side of said reflective element (5, 5') and, on the other hand, an angle (γ) over which it is desired to see the width (s) of said light source (3, 3') from the end (R_0) of said profile,



This Sheet Has Been Replaced



- defining an illumination function $E(\theta)$ corresponding to a desired illumination curve, connected to a luminance function $L(\theta)$ by the formula:

$$25 \quad E(\theta) = L(\theta) \cdot \cos^2 \theta = k[(s \cdot \cos \theta + \rho_r \cdot \sin(\phi - \theta) - \rho_{r_0} \cdot \sin(\phi_0 - \theta))] \cos^2 \theta$$

if said end (Ro) of the profile of the reflective element (5, 5') is the downstream end of the latter, and an illumination function:

$$E(\theta) = L(\theta) \cdot \cos^2 \theta = k[(s \cdot \cos \theta - \rho_r \cdot \sin(\phi - \theta) + \rho_{r_0} \cdot \sin(\phi_0 - \theta))] \cos^2 \theta$$

30 if said end (Ro) is the upstream end of said profile, in which $k = L(0)/s$

- determining, from said end (Ro), the coordinates of each of the points (R) of said profile of each reflective element (5, 5') satisfying the differential equation:

$$35 \quad d\alpha/d\theta = \sin \alpha \cdot \cos \alpha [d \log p(\theta)/d\theta] - \sin^2 \alpha, \text{ in which}$$

the function $p(\theta)$ is equal to $\rho_r \cdot \sin(\phi - \theta)$ and the value of the angle α is equal to $(\phi - \theta)/r$.

2. Process according to claim 1 characterized in that said flat light source (3, 3') is constituted of a virtual image obtained from a cylindrical light source (4) of circular section and from a primary reflector (17) whose shape is a circular development.

3. Process according to claim 2 characterized in that the external surface of said cylindrical light source (4) is spaced from the internal surface of the primary reflector (17) and, after having determined the illumination function ($E(\theta)$) supplied by the light, an illumination correction



This Sheet Has Been Replaced



function ($F_c(\theta)$) is defined with which the illumination function ($E(\theta)$) is modified.

4. Process according to claim 2 characterized in that there is effected a truncation of the primary reflector (17) by an angle (β) whose value is about 30° .

5 5. Process according to one of the preceding claims characterized in that there is given to the angle (γ) across which it is desired to see the width (s) of the light source (3, 3') from the end (R_o) of the profile of a reflective element (5, 5'), a value greater than that of the angle (θ_c , $\theta_{c'}$) over which one sees, from the center of the light, each of the end points (C, C') of the target surface (7).

5 6.- Light constituted by a flat light source (3, 3'), symmetrical relative to a plane (P), and by at least two cylindrical reflective elements (5, 5'), each point (R) on the profile of a reflective element (5, 5') being defined by the length (r) of the segment (RO) representing the distance from the end (0) of the cross section of said light source (3, 3'), situated beside said reflective element (5, 5'), to said point (R), and by the angle (ϕ) formed by the vertical with said segment (RO), in which the light beams from the flat light source (3, 3') form, at the output of the light, respective angles (θ) with said plane (P), characterized in that one end (R_o) of said profile of said reflective element (5, 5') is positioned at a desired distance (r_o) from said end (0) of the cross section of said light source (3, 3') such that, from

10



This Sheet Has Been Replaced



15 this end (R_0), the width (s) of said light source ($5, 5'$) is
 seen across a desired angle (γ), the coordinates of each of
 the points (R) of the profile of each of the reflective
 elements ($5, 5'$) are defined from a given illumination
 function $E(\theta)$, determined by a desired illumination curve,
 20 connected to a luminance function $L(\theta)$ by the relationship:

$$E(\theta) = L(\theta) \cdot \cos^2 \theta = k[(s \cdot \cos \theta + p_r \cdot \sin(\phi - \theta) - p_{r_0} \cdot \sin(\phi_0 - \theta)] \cos^2 \theta$$

 if said end of the profile of the reflective element
 is the downstream end of this latter, and an illumination
 function:
 25
$$E(\theta) = L(\theta) \cdot \cos^2 \theta = k[(s \cdot \cos \theta - p_r \cdot \sin(\phi - \theta) + p_{r_0} \cdot \sin(\phi_0 - \theta)] \cos^2 \theta$$

 if said end is the upstream end of said profile, in
 which $k = L(0)/s$
 and satisfying the differential equation:

$$d\alpha/d\theta = \sin \alpha \cdot \cos \alpha [d \log p(\theta)/d\theta] - \sin^2 \alpha$$
, in which
 30 the function $p(\theta)$ is equal to $p_r \cdot \sin(\phi - \theta)$ and the value of the
 angle α is equal to $(\phi - \theta)/r$.

7. Light according to claim 6 characterized in that
 it comprises a primary reflector (17), in the developed shape
 of a circle, giving, from a cylindrical light source (4) of
 circular cross section, a virtual plane image (3') serving as
 5 a flat light source for the light.

8. Light according to claim 7 characterized in that
 the external surface of the cylindrical light source (4) is
 spaced from the internal surface of the primary reflector (17)
 by a given distance (d), and the illumination function $E(\theta)$



This Sheet Has Been Replaced



5 defining the illumination curve of the light is modified by an illumination correction function $F_c(\theta)$.

9. Light according to claim 7 characterized in that the primary reflector (17) is truncated on an angle (β) of about 30° .

5 10. Light according to one of claims 6 to 9 characterized in that the angle (γ) across which it is desired to see the width (s) of the light source (3, 3') from the end (R_o) of the profile of a reflective element (5, 5') has a value greater than that of the angle ($\theta_c, \theta_{c'}$) over which one sees, from the center of the light, each of the end points (C, C') of the target surface (7).

11. Light according to any one of claims 6 to 10 characterized in that the reflective elements (5, 5') are symmetrical relative to said plane (P).



This Sheet Has Been Replaced



DESCRIPTIVE ABSTRACT

The present invention relates to a process for the production of the profile of reflective elements of a light as well as the lights obtained by this process, the light comprising at least two cylindrical reflective elements (5, 5').

This process is characterized in that it comprises the steps consisting of:

- defining the position of one end (R_0) of the profile of each reflective element (5, 5')

- defining an illumination function $E(\theta)$ corresponding to a desired illumination curve, connected to a luminance function $L(\theta)$ by the formula:

$$E(\theta) = L(\theta) \cdot \cos^2 \theta = k[(s \cdot \cos \theta + \rho r \cdot \sin(\phi - \theta) - \rho r_0 \cdot \sin(\phi_0 - \theta)] \cos^2 \theta$$

if said end (R_0) of the profile of the reflective element (5, 5') is the downstream end of this latter, and an illumination function:

$$E(\theta) = L(\theta) \cdot \cos^2 \theta = k[(s \cdot \cos \theta - \rho r \cdot \sin(\phi - \theta) + \rho r_0 \cdot \sin(\phi_0 - \theta)] \cos^2 \theta$$

if said end (R_0) is the upstream end of said profile

- determining, from said end (R_0), the coordinates of each of the points (R) of said profile of each reflective element (5, 5') satisfying the differential equation:

$d\alpha/d\theta = \sin \alpha \cdot \cos \alpha [d \log p(\theta)/d\theta] - \sin^2 \alpha$, in which the function $p(\theta)$ is equal to $\rho r \cdot \sin(\phi - \theta)$ and the value of the angle α is equal to $(\phi - \theta)/r$. (Figure 3)

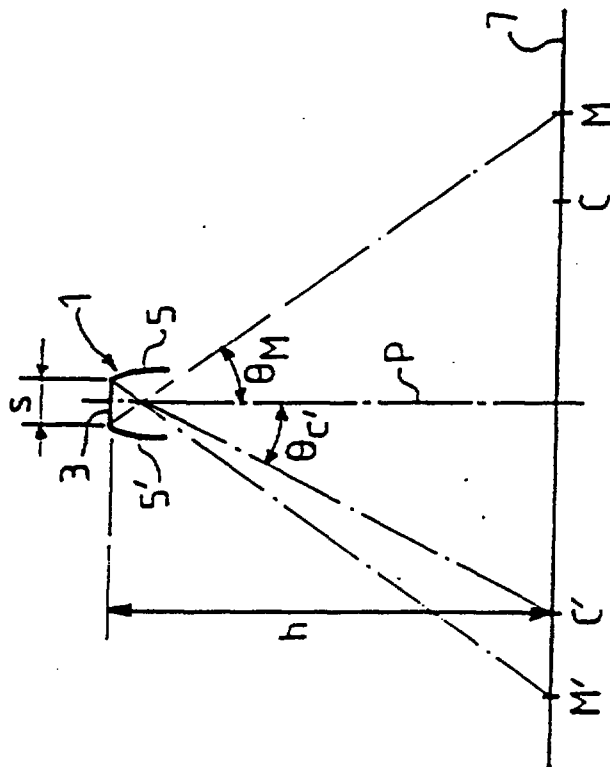


FIG. 1

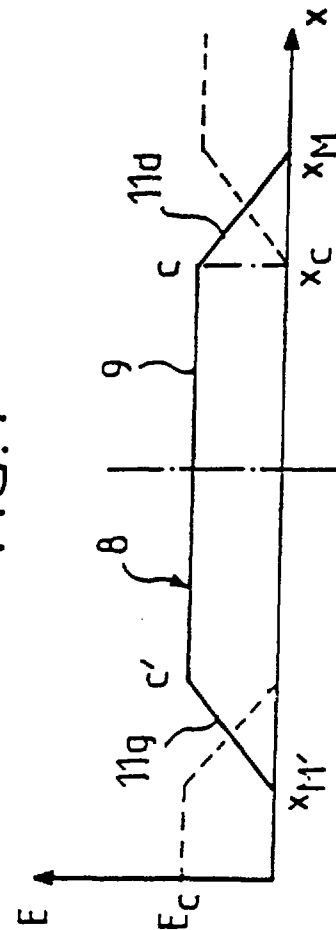


FIG. 2


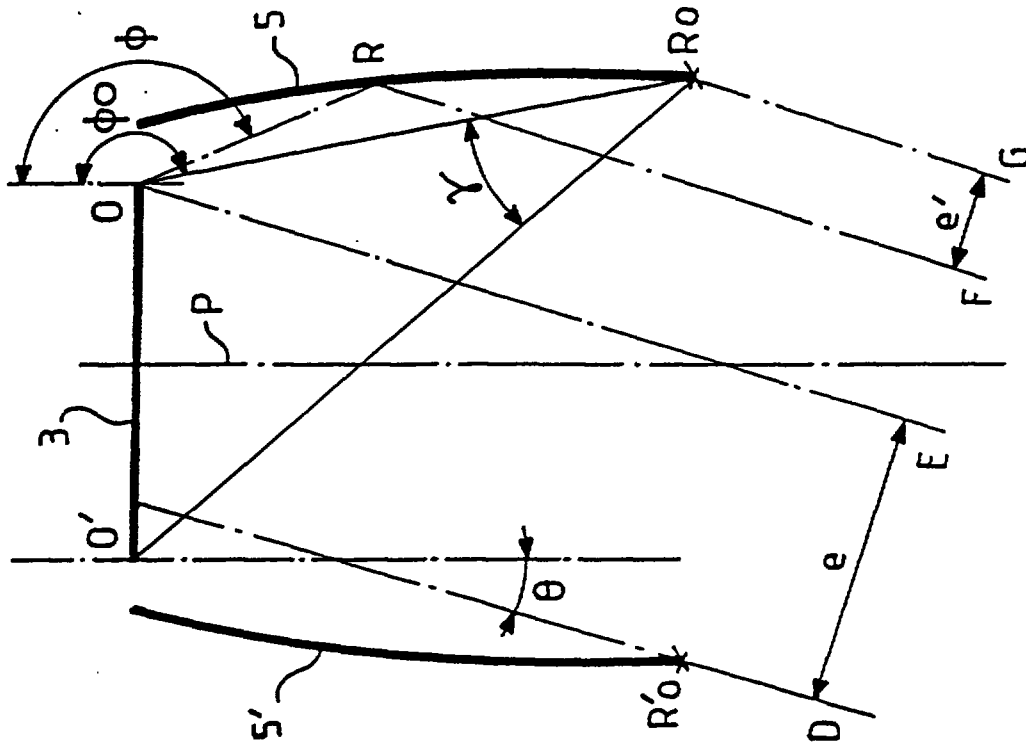


FIG. 3



This Sheet Has Been Replaced

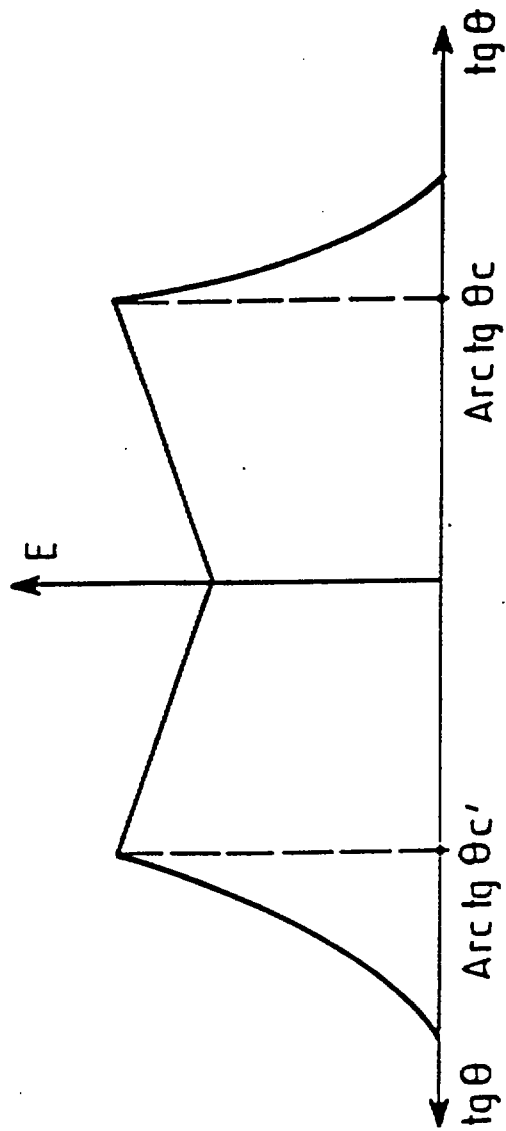


FIG. 7

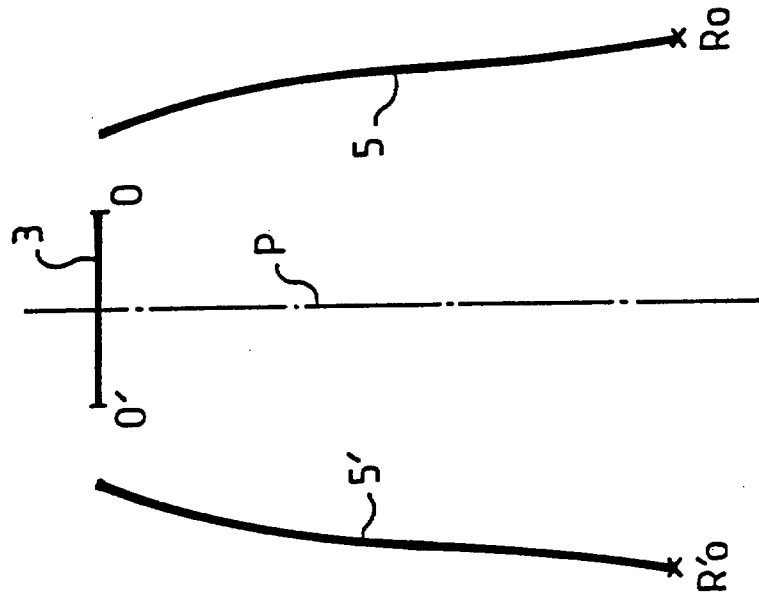


FIG. 8

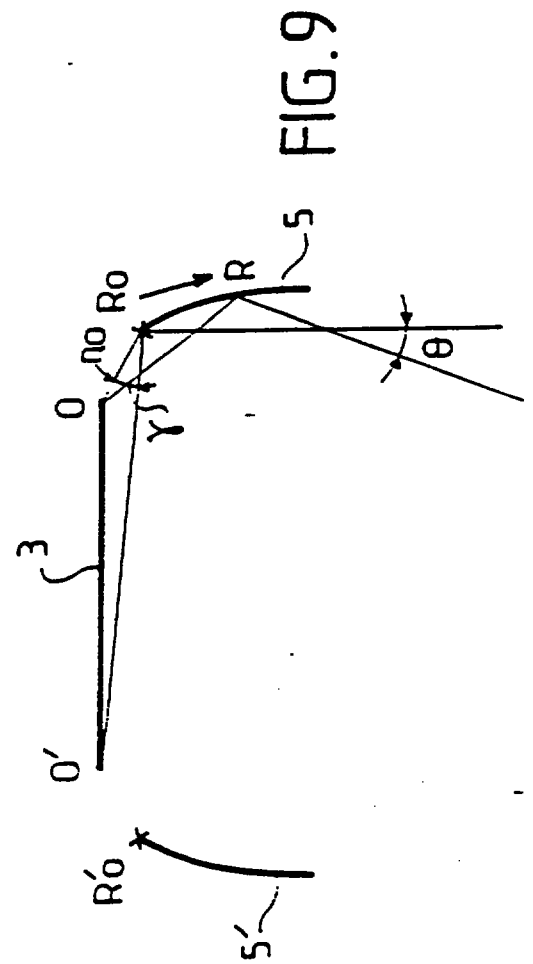


FIG. 9

1**PROCESS FOR THE PRODUCTION OF REFLECTIVE ELEMENTS OF A LIGHT
AND LIGHTS OBTAINED ACCORDING TO THIS PROCESS**

The present invention relates to a process for the production of the profile of reflective elements of a light adapted to illuminate a target surface with substantially any desired illumination profile. The present invention relates also to reflectors produced according to such a process.

There are known different types of reflectors for lights whose profiles are such as to permit obtaining, on a target surface, from cylindrical light sources or concentrated flat light sources, an illumination profile, or illumination curve, which one would wish to be constant overall but which, for various reasons only very rarely achieves an illumination uniformity of about 80%.

These lights have substantial drawbacks. On the one hand, they are not able to illuminate a target surface with any desired lighting profile, and on the other hand, the hardly uniform lighting which they supply is obtained only over a relatively reduced surface.

The present invention has for its object to provide means permitting producing a light which, from an extended light source, supplies over a spaced target surface a lighting curve of practically any profile and particularly a constant

illumination, and this without increasing substantially the size.

The present invention thus has for its object a process for the production of the profile of reflective elements of a light constituted by a flat light source symmetrical relative to a plane, of at least two cylindrical reflective elements, each point of the profile being defined by the length (r) of the segment representing the distance of the end of the cross section of said light source, located beside said reflective element, to said point, and by the angle (ϕ) formed by the vertical with said segment, the light beams from the light source forming, at the output of the light, respective angles (θ) with said plane, characterized in that it comprises the steps consisting:

- in defining the position of one end of the profile of each reflective element, from on the one hand a desired distance (r_0) separating said end from the end of the cross section of said light source situated on the side of said reflective element and, on the other hand, from an angle over which one desires to see the width (s) of said light source from the end of said profile,

- in defining an illumination function $E(\theta)$ corresponding to a desired lighting profile, associated with a luminance $L(\theta)$ by the formula:

$$E(\theta) = L(\theta) \cdot \cos^2 \theta = k[(s \cdot \cos \theta + pr \cdot \sin(\phi - \theta) - pr_0 \cdot \sin(\phi_0 - \theta)) \cos^2 \theta]$$



3

if said end of the profile of the reflective element is the downstream end of the latter, and an illumination function:

$$E(\theta) = L(\theta) \cdot \cos^2 \theta = k[(s \cdot \cos \theta - pr \cdot \sin(\phi - \theta) + pr_0 \cdot \sin(\phi_0 - \theta)) \cos^2 \theta]$$

if said end is the upstream end of said profile, in which $k = L(0)/s$

- in determining, from said end, the coordinates of each of the points of said profile of each reflective element satisfying the differential equation:

$d\alpha/d\theta = \sin \alpha \cdot \cos \alpha [d \log p(\theta)/d\theta] - \sin^2 \alpha$, in which the function $p(\theta)$ is equal to $pr \cdot \sin(\phi - \theta)$ and the value of the angle α is equal to $(\phi - \theta)/r$.

In one embodiment of practicing the invention, said flat light source is constituted by a virtual image obtained from a cylindrical light source of circular cross section and from a primary reflector having the developed shape of a circle.

The present invention also has for its object a light constituted by a flat light source, symmetrical relative to a plane, and by at least two cylindrical reflective elements, each point of the profile of a reflective element being defined by the length (r) of the segment representing the distance from the extremity of the cross section of said light source, located beside said reflective element, to said point, and by the angle (ϕ) formed by the vertical with said segment, in which the light beams from the flat light source form, at the output of the light, respective angles (θ) with

09 FEB 1996

Date

4

said plane, characterized in that an end of said profile of said reflective element is positioned at a desired distance (r_0) from said end (0) of the cross section of said light source, such that, from this end, the width (s) of said light source will be seen under a desired angle, the coordinates of each of the points of the profile of each of the reflective elements are defined from a given illumination function $E(\theta)$ determined by a desired lighting curve, connected to a luminance function $L(\theta)$ by the relationship:

$$E(\theta) = L(\theta) \cdot \cos^2 \theta = k[(s \cdot \cos \theta + pr \cdot \sin(\phi - \theta) - pr_0 \cdot \sin(\phi_0 - \theta)] \cos^2 \theta$$

if said end of the profile of the reflective element is the downstream end of this latter, and an illumination function:

$$E(\theta) = L(\theta) \cdot \cos^2 \theta = k[(s \cdot \cos \theta - pr \cdot \sin(\phi - \theta) + pr_0 \cdot \sin(\phi_0 - \theta)] \cos^2 \theta$$

if said end is the upstream end of said profile, wherein $k = L(0)/s$ and satisfying the differential equation:

$d\alpha/d\theta = \sin \alpha \cdot \cos \alpha [d \log p(\theta)/d\theta] - \sin^2 \alpha$, in which the function $p(\theta)$ is equal to $pr \cdot \sin(\phi - \theta)$ and the value of the angle α is equal to $(\phi - \theta)/r$.

The present invention thus permits controlling the illumination supplied to a target surface. Such illumination could be symmetrical or not relative to the plane of symmetry of the light source, the profiles of the reflective elements of a same light being adapted for this purpose to have different shapes.

The present invention is particularly interesting in the case in which the target surface must be illuminated in a

uniform fashion by several adjacent lights whose end illuminations must overlap with a good tolerance permitting easy positioning of the lights.

The present invention uses flat light sources. However, in practice, there are mostly available light sources having the shape of cylinders of revolution such as, for example, those constituted by fluorescent tubes. The present invention permits using such sources with the light according to the invention because it is known that any convex source can be replaced, as to optics, by an equivalent flat source if it is coupled with a specular reflector in the developed shape of a circle.

In such an embodiment of practice, the present invention permits distancing the cylindrical light source from the internal surface of the specular reflector, while preserving the desired illumination profile, by introducing into the illumination function $E(\theta)$ an illumination correction function $F_c(\theta)$. One can thus protect the reflector from heat given off by the light source.

There will be described hereafter, by way of non-limiting example, an embodiment of the present invention, referring to the accompanying drawing, in which:

Figure 1 is a schematic view showing a light of the type of that of the invention, illuminating a target surface.

Figure 2 is a graph representing the lighting profile, or illumination curve, taken in cross section on a light according to the invention.

6

Figure 3 is a cross-sectional view, on a larger scale, of a light according to the invention.

Figure 4 is a view in cross section, on a larger scale, of an embodiment of practicing the invention.

Figure 5a is a cross-sectional view, on an enlarged scale, of a modification of the mode of practicing the invention shown in Figure 4.

Figure 5b is a graph representing the illumination curve delivered by a cross section of a light according to the invention.

Figure 6 is a cross-sectional view on a larger scale showing a modified embodiment of the device according to the invention.

Figure 7 is a schematic view showing the illumination curve produced by a light according to the invention.

Figure 8 is a view on a larger scale of a cross section of a light according to the invention adapted to reproduce the illumination curve shown in Figure 7.

Figure 9 is a cross-sectional view, on a larger scale, of an embodiment of the invention.

There is shown in Figures 1 to 3 a light 1 constituted by a flat light source 3 and two cylindrical reflective elements 5 and 5' whose cross sections, or profiles, are symmetrical relative to the plane of symmetry (P) of the source 3. This light 1 is adapted to illuminate a target surface 7, disposed at a distance h from the light source 3, this distance being considered as increased relative to the

7

width g of the source 3, which is to say that it is of the order of at least ten times that latter.

The light 1 is adapted to illuminate the target surface 7 with an illumination curve shown in Figure 2. This illumination curve, which represents the value of illumination delivered to the target surface 7 across its transverse dimension, is constituted by a central plateau 9 between two lateral downwardly outwardly inclined legs 11g and 11d. This illumination curve shows that the target surface 7 will be illuminated in a uniform manner between the points C' and C and that on opposite sides of the latter the illumination diminishes progressively to become zero at end points M' and M. Although there is shown in the diagram of Figure 2 only a single cross section of the light 1 and of the target surface 7, these latter will be identical in any other cross section.

As shown in Figure 2, the legs 11g and 11d permit easily associating two adjacent lights, so as to produce an overall illumination equal to the sum of the illumination supplied by each of the lights, which is constant over the target surface 7.

Of course the reflective elements according to the process and device of the invention permit producing a light adapted to reproduce, between the points C and C', any other illumination curve.

A first step of the process according to the invention consists in determining the coordinates of an end edge Ro of each of the reflective elements 5 and 5' and in the

present case there will be chosen the downstream edge. In practice, the position of this latter will depend essentially on two parameters, namely the angle γ under which, from the point R_o , it is desired to see the width s of the light source 3, and the distance r_o separating the point R_o from the end O of the light source 3 nearest the reflective element in question. Preferably, the angle γ will be greater than the angles θ_c and $\theta_{c'}$ under which will be seen, from the center of the light 1, the end points C and C' of the target surface 7 between which it is desired to control the light curve.

The applicant has established that the angle ϕ_o formed by the vertical with the straight line joining the point O to the point R_o was defined by the formula:

$$\phi_o = 180^\circ - \text{Arc sin} (\cos \gamma \sqrt{1 - [r_o \sin \gamma / s]^2}) - (r_o / s) \sin^2 \gamma$$

According to the invention, once the downstream end R_o of the profile of the cross section of the reflective element 5 is determined, the construction can be ensured point by point by passing toward the upstream end of said profile namely by following the curve Roz .

This construction is produced by introducing, for each point R , the characteristic of the desired illumination curve, according to an equation defined hereinafter.

In the particular case of the example selected for Figures 1 to 3, the illumination received by the target surface 7 is constant for each of its points comprised between C and C' . Each of these points can be defined by the beams

09 FEB 1996

Date

from the center of the light and bordering on this point and forming with the vertical an angle θ .

The illumination curve of the target surface 7 is thus defined between the end angles $\theta_{c'}$ and θ_c corresponding to the end points C' and C of the target surface 7. The luminance $L(\theta)$ supplied to a point on the target surface 7 corresponding to a given angle θ is equal to the incident luminance $L(\theta)_i$ from the beams emitted directly from the light source 3 without being subjected to reflection on the reflective element 5, added to the reflected luminance $L(\theta)_r$ from the beams transmitted after reflection ($L(\theta) = L(\theta)_i + L(\theta)_r$).

In Figure 3, this luminance $L(\theta)$ is proportional to the sum of the distance $e = DE = s \cdot \cos \theta$ and of the distance $e' = FG = r \cdot \sin(\phi - \theta) - r_0 \cdot \sin(\phi_0 - \theta)$, so that the luminance at a given point on the target surface of angle θ is:

$$L(\theta) = k(e + e') = k[s \cos \theta + \rho \cdot r \sin(\phi - \theta) - \rho r_0 \cdot \sin(\phi_0 - \theta)]$$

in which ρ is a constant characteristic of the coefficient of reflectivity of the surface of the light, related to the nature of this latter and its surface condition.

The constant k can be expressed as being equal to the luminance $L(\theta)$ supplied by beams parallel to the plane of symmetry P of the light 1 in which $\theta = 0$. Thereafter:

$$k = L(0)/s$$

As to the illumination $E(\theta)$ received at a point on the target comprised between the end points C and C' and

10

forming an angle θ with the plane of symmetry P of the light, this is equal to:

$$E(\theta) = L(\theta) \cdot \cos^2 \theta$$

In the case of a uniform illumination profile and for a spaced source, as mentioned previously, the illumination $E(\theta)$ becomes: $E(\theta) = L(\theta) \cdot \cos^2 \theta = \text{cste}$

namely

$$L(\theta) = \text{cste} / \cos^2 \theta = L(0) / s \cdot (s \cos \theta + \rho r \cdot \sin(\phi - \theta) - \rho r_0 (\sin \phi_0 - \theta))$$

Given that $p(\theta) = \rho r \cdot \sin(\phi - \theta)$ and $\phi = 2\alpha + \theta$

one derives the following differential equation:

$$d\alpha/d\theta = \sin \alpha : \cos \alpha [d \log p(\theta)/d\theta] - \sin^2 \alpha$$

Such a first order differential equation can be solved by giving a limit condition according to which a beam from the end O of the light source 3 nearest the reflective element 5, is reflected at Ro along a vertical, so that at this point $\theta = 0$.

Suitable computation means thus permit computing each of the successive points of the reflective element 5 and hence tracing, preferably by automated means, the profile Roz of this latter. Obviously, the reflective element 5' will be constructed symmetrically.

As mentioned above, the present invention permits obtaining illumination curves of substantially any appearance.

There can for example thus be designed a light whose profile of the reflective elements will be such that the illumination falling on the target surface will be at each

09 FEB 1996

Date

11

point proportional to the tangent of the angle θ formed by this point with the center of the light.

In such an arrangement, the illumination curve is defined by the equation: $E(\theta) = E(0) \cdot (1 + \operatorname{tg} \theta)$ which is valid between two end points C and C'.

There is respectively shown in Figures 7 and 8 such an illumination curve and the cross section of each of the reflective elements 5 and 5'.

In most of the possible uses of the invention, the light sources will not be flat sources but sources in the form of a cylinder of revolution, such as fluorescent tubes and the like. It is known optically that an equivalent of a flat source can be a cylindrical light source by providing the latter with a cylindrical reflector whose developed profile is a circle.

There is thus shown in Figure 4 the cross section of a light, used according to the invention, and which is constituted by cylindrical elements. This light is comprised of a light source constituted by a cylindrical luminescent tube 4, a reflector 17 called a primary reflector, whose cross section is in the form of a developed circle, and two reflective elements 5, 5' which are symmetrical relative to the plane of symmetry P of the light source 4. The primary reflector 17 gives from the cylindrical light source 4 a rectangular image of width OO', which plays the role of a virtual light source relative to the reflective elements 5, 5'. Thereafter the

09 FEB 1996

Date

12

construction of the reflective elements 5, 5' takes place as described above.

A drawback of this type of light is that the primary reflector 17, having the developed shape of a circle, increases substantially the height of the light. Means permitting reducing this size consists in truncating the base of the primary reflector 17, as shown in Figure 5a, which permits displacing in an upstream direction (that is toward the top in the drawing) the downstream ends Ro of the reflective elements 5, 5'.

Tests carried out by the applicant have established that the best results are obtained when there is effected a truncation of each of the elements of circular development with a straight line forming, with the perpendicular xx' to the plane of symmetry P of the light, an angle β of about 20° . The point of intersection of this straight line with the profile of circular development of the primary reflector 17 gives an end O to the virtual light source. From this point O one thus proceeds as previously indicated to determine the downstream end Ro of the profile of the reflective element 5.

It is moreover known that even if the fluorescent tubes do not ordinarily produce large quantities of heat, it is however sometimes necessary to space them from the reflectors, so as to avoid their deterioration under the effect of heat. When such a displacement is effected, the image 3' of the light source 4, playing the role of a virtual light source relative to the reflective elements 5, 5', is in that case not

strictly isotropic, so that the resulting illumination curve distributed over the target surface 7 will be accordingly modified.

There is thus shown in Figure 6 such a modification of the practice of the invention in which the external surface of a fluorescent tube 4 is spaced by a distance d from the bottom of the primary reflector 17. There is shown in dotted line on Figure 5b the illumination curve supplied by such a light over the spaced target surface 7. It will be seen that in lieu of obtaining the desired profile, which is to say an illumination profile comprising a central plateau constituted by a straight line CC', there is obtained a curve CDC' whose concavity is directed upwardly.

The present invention permits acting on the shape of the reflective elements 5 and 5' to give them a correction returning the illumination curve to the desired straight line. To do this, there is introduced a new function, a so-called correction function $F_c(\theta)$, representing for each of the angles θ a correction factor to be given to the illumination function $L(\theta)$. At each of the points the correction factor $F_c(\theta)$ is equal to the ratio of the luminance which it is desired to obtain, to the obtained luminance (which it is desired to correct) $F_c(\theta) = HK/IK$. There is thus obtained a new function $L'(\theta)$ from which there is established as before a differential equation of the type of the preceding equation which defines the profile of each of the reflective elements 5, 5'.

Such a modification of the invention could of course be practiced with illumination curves other than linear.

One could also combine two different modes of embodiment of the invention, so as to provide particularly a light adapted, from a cylindrical or non-cylindrical light source in contact with the primary truncated reflector, on a target surface spaced from said source, an illumination curve of substantially any shape.

Although in the preceding examples the profile of the cross section of a reflective element has been formed beginning by determining its downstream end R_0 , one could also of course proceed in the reverse fashion.

There is thus shown in Figure 9 a light constituted by a light source 3' and two reflective elements 5 and 5' whose upstream ends R_0 of the profiles are determined as before by the values r_0 of the distance of R_0 to the end 0 of the cross section of the light source 3', and by the angle γ from which will be seen, from the end R_0 , the cross section s of the light source 3.

In this embodiment the illumination of the target surface is thus:

$$E(\theta) = L(\theta) \cdot \cos^2 \theta = k[s \cdot \cos \theta - pr \cdot \sin(\phi - \theta) + pr_0 \cdot \sin(\phi_0 - \theta)]$$

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

Date 09 FEB 1996

15

CLAIMS

1. - Process for the production of the profile of reflective elements of a light constituted by a flat light source (3, 3') symmetrical relative to a plane (P), of at least two cylindrical reflective elements (5, 5') each point (R) of said profile being defined by the length (r) of the segment (RO) representing the distance from the end (O) of the cross section of said light source (3, 3'), located on the side of said reflective element (5, 5'), to said point (R), and by the angle (ϕ) formed by the vertical with said segment (RO), the light beams from the light source (3, 3') forming, at the output of the light, respective angles (θ) with said plane (P), characterized in that it comprises the steps consisting of:

- defining the position of one end (R_0) of the profile of each reflective element (5, 5'), from on the one hand a desired distance (r_0) separating said end (R_0) of the end (O) of the cross section of said light source (3, 3') located on the side of said reflective element (5, 5') and, on the other hand, an angle (γ) over which it is desired to see the width (s) of said light source (3, 3') from the end (R_0) of said profile,



* C L M S *

- defining an illumination function $E(\theta)$ corresponding to a desired illumination curve, connected to a luminance function $L(\theta)$ by the formula:

$$E(\theta) = L(\theta) \cdot \cos^2 \theta = k[(s \cdot \cos \theta + pr \cdot \sin(\phi - \theta) - pr_0 \cdot \sin(\phi_0 - \theta)] \cos^2 \theta$$

if said end (Ro) of the profile of the reflective element (5, 5') is the downstream end of the latter, and an illumination function:

$$E(\theta) = L(\theta) \cdot \cos^2 \theta = k[(s \cdot \cos \theta - pr \cdot \sin(\phi - \theta) + pr_0 \cdot \sin(\phi_0 - \theta)] \cos^2 \theta$$

if said end (Ro) is the upstream end of said profile, in which $k = L(0)/s$

- determining, from said end (Ro), the coordinates of each of the points (R) of said profile of each reflective element (5, 5') satisfying the differential equation:

$d\alpha/d\theta = \sin \alpha \cdot \cos \alpha [d \log p(\theta)/d\theta] - \sin^2 \alpha$, in which the function $p(\theta)$ is equal to $pr \cdot \sin(\phi - \theta)$ and the value of the angle α is equal to $(\phi - \theta)/r$.

2. Process according to claim 1 characterized in that said flat light source (3, 3') is constituted of a virtual image obtained from a cylindrical light source (4) of circular section and from a primary reflector (17) whose shape is a circular development.

3. Process according to claim 2 characterized in that the external surface of said cylindrical light source (4) is spaced from the internal surface of the primary reflector (17) and, after having determined the illumination function ($E(\theta)$) supplied by the light, an illumination correction



function $(F_c(\theta))$ is defined with which the illumination function $(E(\theta))$ is modified.

4. Process according to claim 2 characterized in that there is effected a truncation of the primary reflector (17) by an angle (β) whose value is about 30° .

5. Process according to one of the preceding claims characterized in that there is given to the angle (γ) across which it is desired to see the width (s) of the light source $(3, 3')$ from the end (R_0) of the profile of a reflective element $(5, 5')$, a value greater than that of the angle $(\theta_c, \theta_{c'})$ over which one sees, from the center of the light, each of the end points (C, C') of the target surface (7) .

6.- Light constituted by a flat light source $(3, 3')$, symmetrical relative to a plane (P) , and by at least two cylindrical reflective elements $(5, 5')$, each point (R) on the profile of a reflective element $(5, 5')$ being defined by the length (r) of the segment (RO) representing the distance from the end (O) of the cross section of said light source $(3, 3')$, situated beside said reflective element $(5, 5')$, to said point (R) , and by the angle (ϕ) formed by the vertical with said segment (RO) , in which the light beams from the flat light source $(3, 3')$ form, at the output of the light, respective angles (θ) with said plane (P) , characterized in that one end (R_0) of said profile of said reflective element $(5, 5')$ is positioned at a desired distance (r_0) from said end (O) of the cross section of said light source $(3, 3')$ such that, from



this end (R_0), the width (s) of said light source ($5, 5'$) is seen across a desired angle (γ), the coordinates of each of the points (R) of the profile of each of the reflective elements ($5, 5'$) are defined from a given illumination function $E(\theta)$, determined by a desired illumination curve, connected to a luminance function $L(\theta)$ by the relationship:

$$E(\theta) = L(\theta) \cdot \cos^2 \theta = k[(s \cdot \cos \theta + p_r \cdot \sin(\phi - \theta) - p_{r_0} \cdot \sin(\phi_0 - \theta)] \cos^2 \theta$$

if said end of the profile of the reflective element is the downstream end of this latter, and an illumination function:

$$E(\theta) = L(\theta) \cdot \cos^2 \theta = k[(s \cdot \cos \theta - p_r \cdot \sin(\phi - \theta) + p_{r_0} \cdot \sin(\phi_0 - \theta)] \cos^2 \theta$$

if said end is the upstream end of said profile, in which $k = L(0)/s$

and satisfying the differential equation:

$d\alpha/d\theta = \sin \alpha \cdot \cos \alpha [d \log p(\theta)/d\theta] - \sin^2 \alpha$, in which the function $p(\theta)$ is equal to $p_r \cdot \sin(\phi - \theta)$ and the value of the angle α is equal to $(\phi - \theta)/r$.

7. Light according to claim 6 characterized in that it comprises a primary reflector (17), in the developed shape of a circle, giving, from a cylindrical light source (4) of circular cross section, a virtual plane image (3') serving as a flat light source for the light.

8. Light according to claim 7 characterized in that the external surface of the cylindrical light source (4) is spaced from the internal surface of the primary reflector (17) by a given distance (d), and the illumination function $E(\theta)$



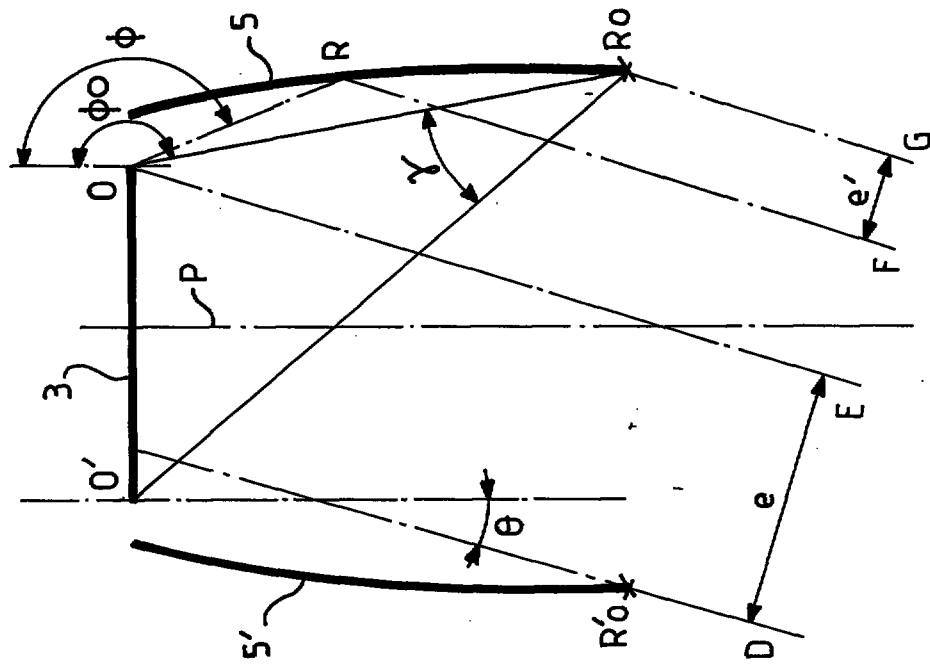


FIG. 3

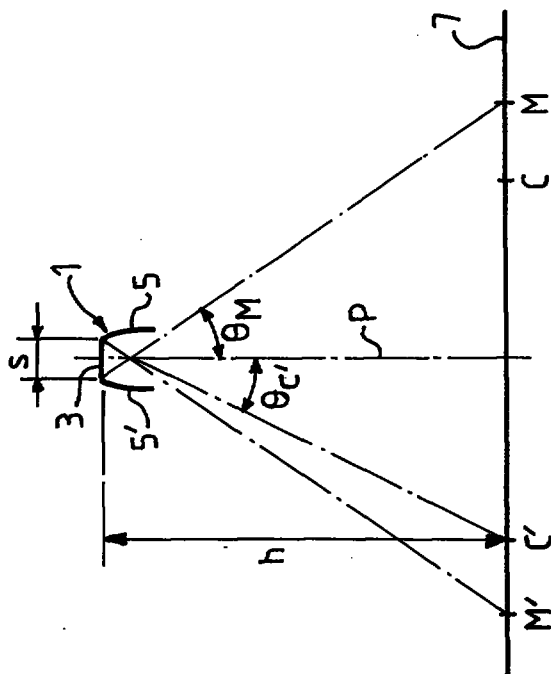


Fig. 1

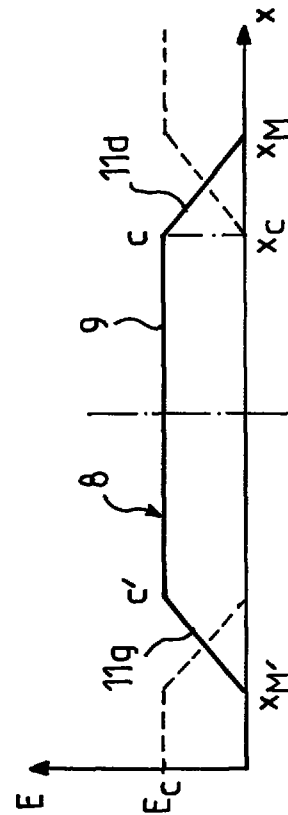


FIG. 2

2/3

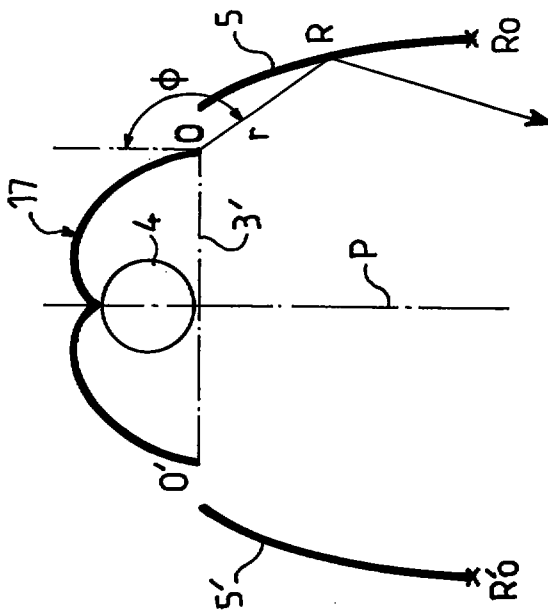


FIG. 4

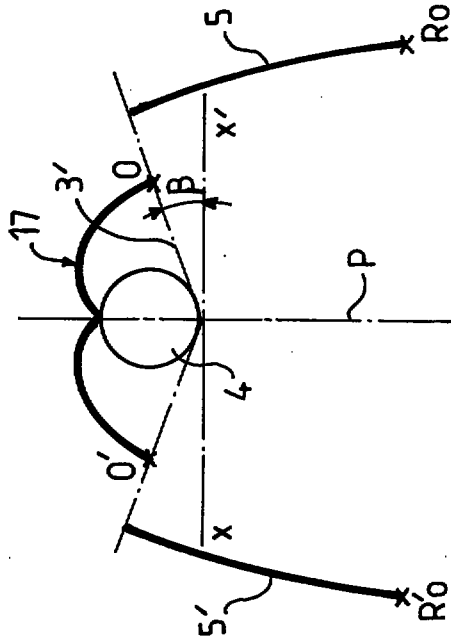


FIG. 5a

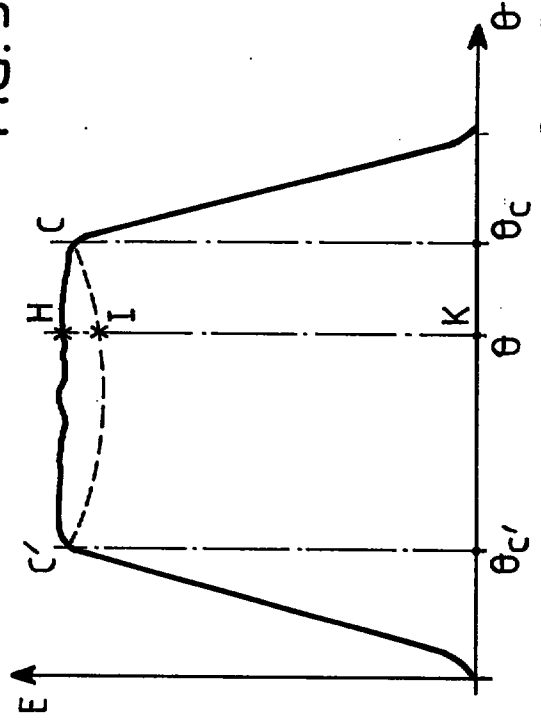


FIG. 5b




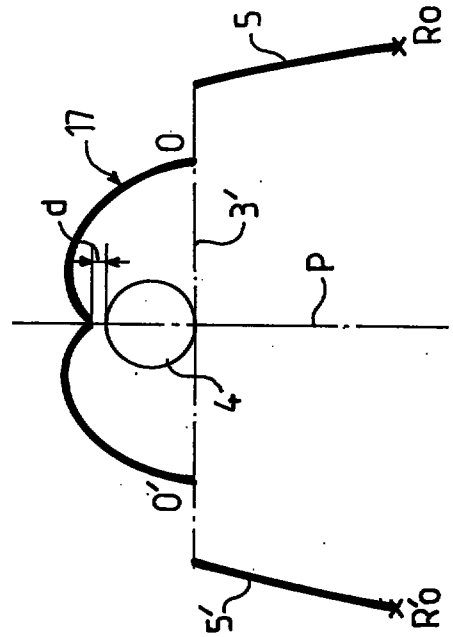


FIG. 6

3/3

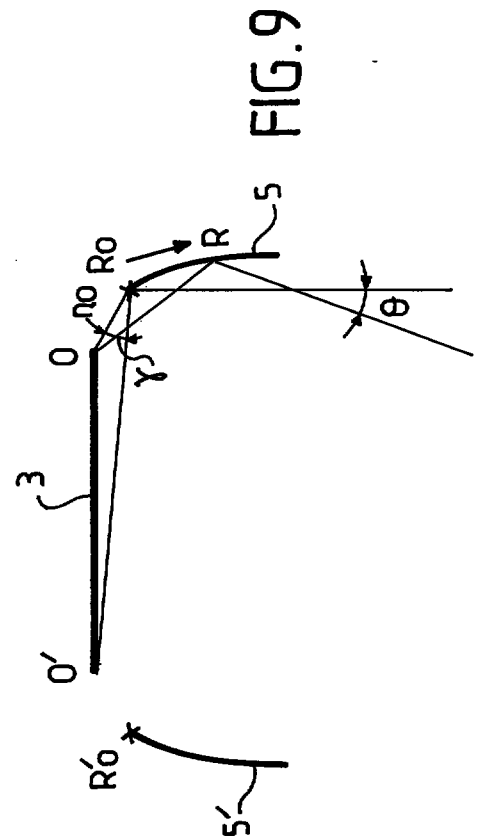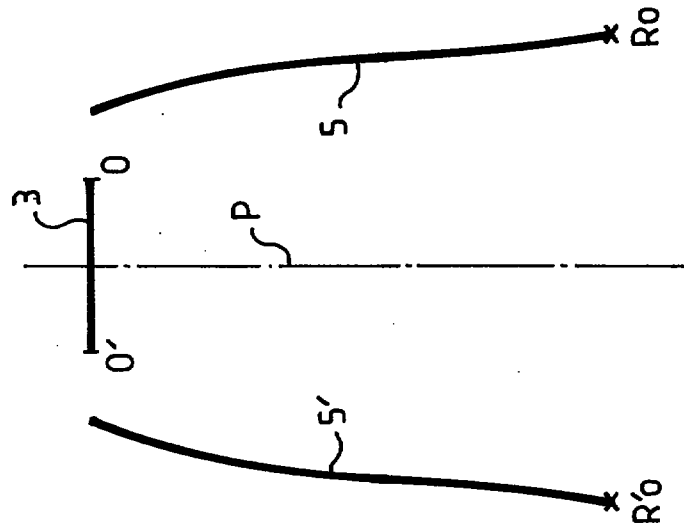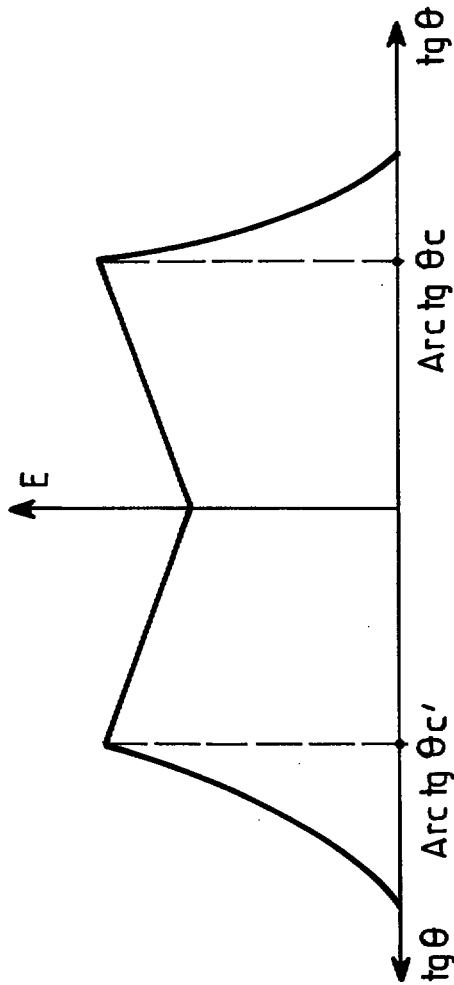

PROCESS FOR THE PRODUCTION OF REFLECTIVE ELEMENTS OF A LIGHT
AND LIGHTS OBTAINED ACCORDING TO THIS PROCESS

DESCRIPTIVE ABSTRACT

The present invention relates to a process for the production of the profile of reflective elements of a light as well as the lights obtained by this process, the light comprising at least two cylindrical reflective elements (5, 5').

This process is characterized in that it comprises the steps consisting of:

- defining the position of one end (R_0) of the profile of each reflective element (5, 5')

- defining an illumination function $E(\theta)$ corresponding to a desired illumination curve, connected to a luminance function $L(\theta)$ by the formula:

$$E(\theta) = L(\theta) \cdot \cos^2 \theta = k[(s \cdot \cos \theta + p \cdot r \cdot \sin(\phi - \theta) - p \cdot r_0 \cdot \sin(\phi_0 - \theta)] \cos^2 \theta$$

if said end (R_0) of the profile of the reflective element (5, 5') is the downstream end of this latter, and an illumination function:

$$E(\theta) = L(\theta) \cdot \cos^2 \theta = k[(s \cdot \cos \theta - p \cdot r \cdot \sin(\phi - \theta) + p \cdot r_0 \cdot \sin(\phi_0 - \theta)] \cos^2 \theta$$

if said end (R_0) is the upstream end of said profile

- determining, from said end (R_0), the coordinates of each of the points (R) of said profile of each reflective element (5, 5') satisfying the differential equation:

$d\alpha/d\theta = \sin \alpha \cdot \cos \alpha [d \log p(\theta)/d\theta] - \sin^2 \alpha$, in which the function $p(\theta)$ is equal to $p \cdot r \cdot \sin(\phi - \theta)$ and the value of the angle α is equal to $(\phi - \theta)/r$. (Figure 3)

CLAIMS

1. - Process for the production of the profile of reflective elements of a light constituted by a flat light source (3, 3') symmetrical relative to a plane (P) and by at least two cylindrical reflective elements (5, 5'), each point (R) of said profile of a reflective element (5, 5') being defined by the length (r) of the segment (RO) representing the distance from the end (0) of the cross section of said light source (3, 3'), located beside said reflective element (5, 5'), to said point (R), and by the angle (ϕ) formed by the vertical with said segment (RO), the light beams from the light source (3, 3') forming, at the output of the light, respective angles (θ) with said plane (P), characterized in that it comprises the steps consisting of:

- defining the position of one end (R_0) of the profile of each reflective element (5, 5'), from on the one hand a desired distance (r_0) separating said end (R_0) of the end (0) of the cross section of said light source (3, 3') located on the side of said reflective element (5, 5') and, on the other hand, an angle (γ) over which it is desired to see the width (s) of said light source (3, 3') from the end (R_0) of said profile,



REPLACEMENT SHEET

2

illumination, and this without increasing substantially the size.

The present invention thus has for its object a process for the production of the profile of reflective elements of a light constituted by a flat light source symmetrical relative to a plane and by at least two cylindrical reflective elements, each point of the profile of a reflective element being defined by the length (r) of the segment representing the distance from the end of the cross section of said light source, located beside said reflective element, to said point, and by the angle (ϕ) formed by the vertical with said segment, the light beams from the light source forming, at the output of the light, respective angles (θ) with said plane, characterized in that it comprises the steps consisting:

- in defining the position of one end of the profile of each reflective element, from on the one hand a desired distance (r_0) separating said end from the end of the cross section of said light source situated beside said reflective element and, on the other hand, from an angle over which one desires to see the width (s) of said light source from the end of said profile,

- in defining an illumination function $E(\theta)$ corresponding to a desired lighting profile, associated with a luminance $L(\theta)$ by the formula:

$$E(\theta) = L(\theta) \cdot \cos^2 \theta = k[(s \cdot \cos \theta + pr \cdot \sin(\phi - \theta) - pr_0 \cdot \sin(\phi_0 - \theta)] \cos^2 \theta$$