



(51) International Patent Classification:
A63G 31/00 (2006.01) A63F 9/24 (2006.01)

(21) International Application Number:
PCT/US2024/049714

(22) International Filing Date:
03 October 2024 (03.10.2024)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
63/590,978 17 October 2023 (17.10.2023) US
18/759,207 28 June 2024 (28.06.2024) US

(71) Applicant: UNIVERSAL CITY STUDIOS LLC
[US/US]; 100 Universal City Plaza, Universal City, California 91608 (US).

(72) Inventors: VANKERSCHAEVER, Morris A.; 1000 Universal Studios Plaza, Orlando, Florida 32819 (US). GATHMAN, Blaine Michael; 1000 Universal Studios Plaza, Orlando, Florida 32819 (US). MAJDALI, David Gerard; 1000 Universal Studios Plaza, Orlando, Florida 32819 (US).

(74) Agent: POWELL, W. Allen et al.; P.O. Box 692289, Houston, Texas 77269 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, MG, MK, MN, MU, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, CV, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SC, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, ME, MK, MT, NL, NO, PL, PT, RO, RS, SE,

(54) Title: SYSTEMS AND METHODS FOR RESETTING A SHOW EFFECT SYSTEM

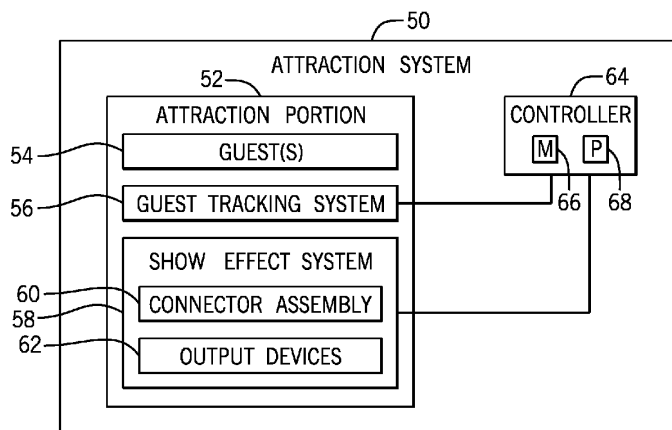


FIG. 1

(57) Abstract: A show effect system (58) may include one or more cables (90), a front panel (84) coupled to one or more coupling joints (86) configured to receive the one or more cables (90) and provide a signal indicative of a connection between a first cable (90A) of the one or more cables (90) and a first coupling joint (86A) of the one or more coupling joints (86), and a slidable plate (186) coupled to one or more pins (192) and an actuator (194), wherein the actuator (194) is configured to drive the slidable plate (186) to bring a first pin (192A) of the one or more pins (192) into contact with the first cable (90A) to disconnect the first cable (90A) from the first coupling joint (86A).

[Continued on next page]



SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*