



(43) International Publication Date
25 September 2014 (25.09.2014)

- (51) International Patent Classification:
C09D 5/18 (2006.01) *C09D 7/12* (2006.01)
- (21) International Application Number:
PCT/EP2014/055824
- (22) International Filing Date:
24 March 2014 (24.03.2014)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
1350361-0 22 March 2013 (22.03.2013) SE
- (71) Applicant: FÜRSTENBERG AMFI-TOP [NO/NO];
Hammerslandgrenda 27, N-5252 Söreidgrend (NO).
- (72) Inventor: FÜRSTENBERG-RYSJEDAL, Svein; Ham-
merslandgrenda 27, N-5252 Söreidgrend (NO).
- (74) Agent: AWAPATENT AB; P.O. Box 5117, S-200 71
Malmö (SE).
- (81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,


AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.

- (84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: PREFABRICATED FLOOR

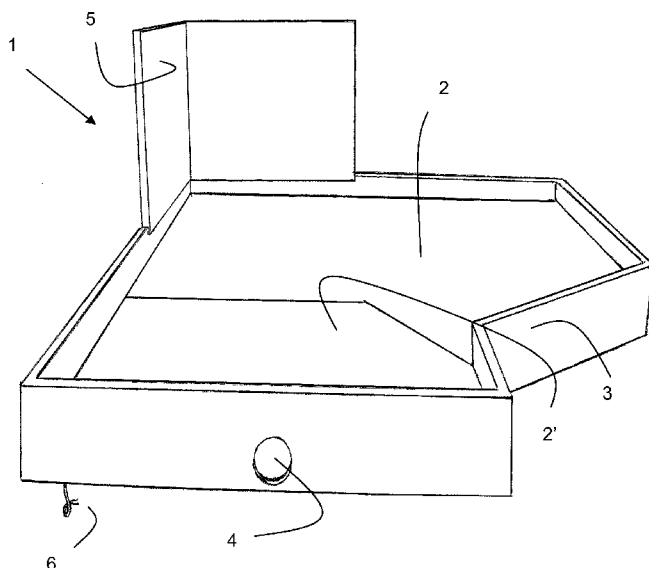

(57) Abstract: The invention relates to a pre-fabricated wet room floor (1) comprising a wear surface (2, 2') that is made of a solid surface material, wherein said solid surface material is composed of aluminium trihydrate (ATH) or aluminium monohydrate (AMH) and a polymer binding medium, wherein said solid surface material has a ATH or AMH content of above 50%.

Fig. 1