



(51) International Patent Classification:
E04G 5/00 (2006.01) *E04G 7/28* (2006.01)

(21) International Application Number:
PCT/GB2010/051993

(22) International Filing Date:
30 November 2010 (30.11.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0920912.3 30 November 2009 (30.11.2009) GB

(72) Inventor; and

(71) Applicant : **MOORE, Philip** [GB/GB]; c/o Scaffolding Solutions Ltd, 26 Breakfield, The Ullswater Business Park, Coulsdon, Surrey CR5 2HS (GB).

(74) Agent: **IP21 LIMITED**; Central Formalities Department, Lakeside 300, Old Chapel Way, Broadland Business Park, Norwich Norfolk NR7 0WG (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: SCAFFOLD TRAY

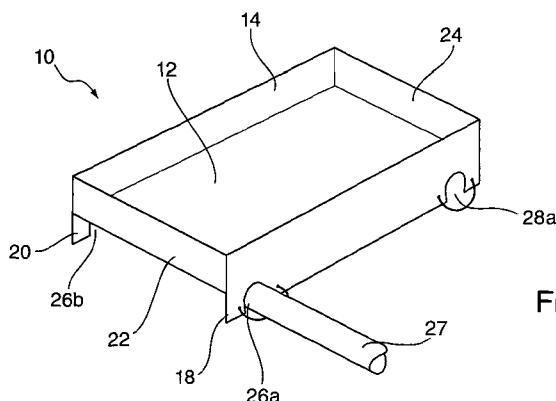


Fig.1

(57) Abstract: The present invention discloses a lipped tray, intended for use on scaffold towers and adapted to hold builders' tools in use. The tray incorporates on each of its two opposite side edge regions a means which, when the tray is in use, locates the tray between horizontally successive rails of the tower in a manner which also causes the tray to engage with one at least of those rails and be supported, in use, by each of them.