



(51) International Patent Classification:
B65D 90/00 (2006.01) *B65G 63/00* (2006.01)
B65D 90/12 (2006.01)

(21) International Application Number:
PCT/SE2011/050107

(22) International Filing Date:
2 February 2011 (02.02.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
1050107-0 3 February 2010 (03.02.2010) SE

(71) Applicant (for all designated States except US): **SHIP TO SHORE TECHNOLOGY HOLDNING B.V.** [NL/NL]; Saturnusstraat 25 i, NL-2132HB Hoofddorp (NL).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **BOHMAN, Karl** [SE/SE]; Lusthusbacken 9, S-167 65 Bromma (SE).

(74) Agent: **Groth & Co. KB**; Box 6107, S-102 32 Stockholm (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

Published:

— with international search report (Art. 21(3))

(54) Title: DEVICE FOR CONING AND/OR DECONING A CONTAINER AND METHODS RELATED THERETO

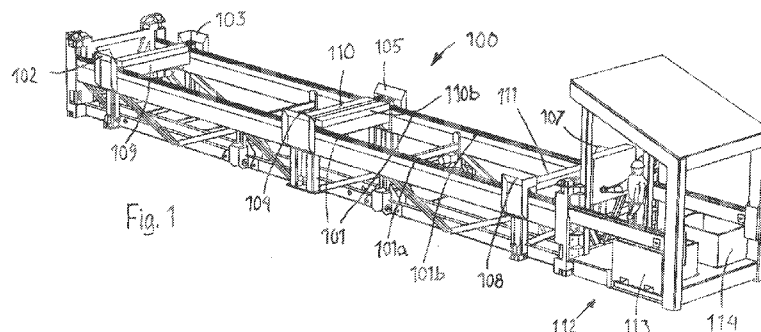

(57) Abstract: The invention relates to a device for coning and/or deconing a container unit having corner fittings for the attachment of twist-locks. The device has a support structure (100) for the container unit. The support structure (100) has two parallel long sides and two end sides. According to the invention, the device also includes a storage station (112) that is located adjacent and outside one of the end sides. There is a first conveyor means (101a) along a first of the long sides and a second conveyor means (101b) along a second of the long sides. Each conveyor means (101a, 101b) is arranged to transport twist-locks to and from the corner fittings from and to the storage. The invention also relates to corresponding methods for coning and deconing, respectively.