

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
23 February 2006 (23.02.2006)

PCT

(10) International Publication Number
WO 2006/017883 A3

(51) International Patent Classification:

G09G 3/34 (2006.01) G09F 9/30 (2006.01)
G09G 3/20 (2006.01) G02B 26/08 (2006.01)
G09G 3/02 (2006.01)

(21) International Application Number:

PCT/AU2005/001171

(22) International Filing Date: 8 August 2005 (08.08.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

US 60/602,773 19 August 2004 (19.08.2004) US

(71) Applicant and

(72) Inventor: HUANG, Da, Wei [AU/AU]; PO Box 6079,
North Ryde, NSW 2113 (AU).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,

GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA,
MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ,
OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL,
SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC,
VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT,
RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:


— with international search report

(88) Date of publication of the international search report:

1 June 2006

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: VISUAL DISPLAY

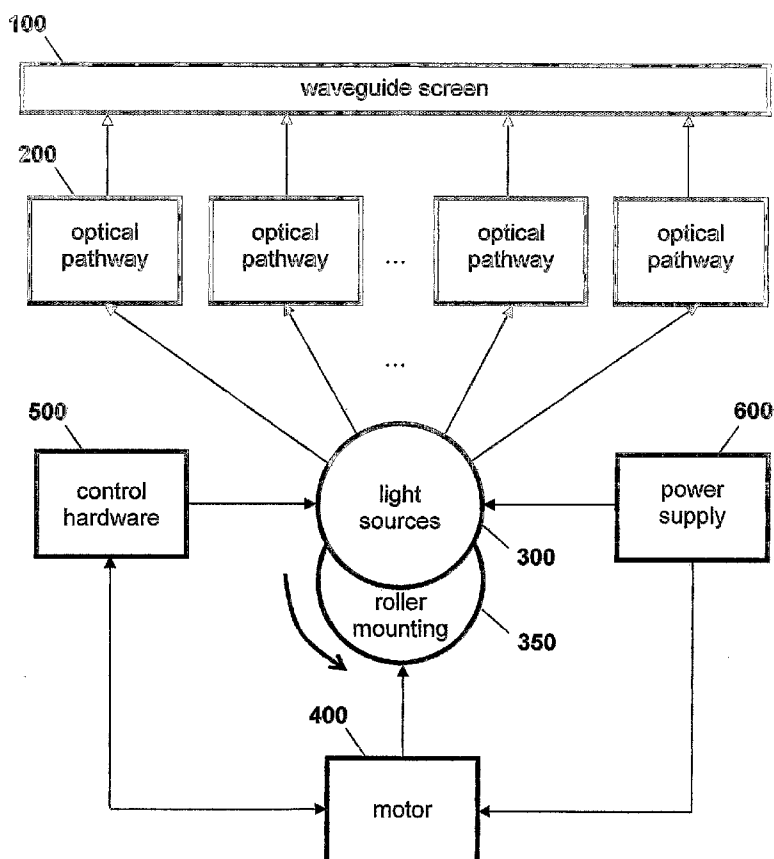

(57) Abstract: A visual display is formed by picture elements, which are optically coupled to optical pathways (200) through which light is supplied from light sources (500). Light sources (300), controlled by control hardware (500), transmit light to the optical pathways (200) by scanning light from the light sources (300) to different optical pathways (200). The light sources (300) and the optical pathways (200) are mutually oriented so that light from the light sources (300) can be lead to different optical pathways (200) to form the displayed image. Light sources (300) can be mounted to a rotating mounting (350) that rotates past static pathways (200) that transmit coupled light to the waveguide screen (100).

WO 2006/017883 A3