


Fig. 1

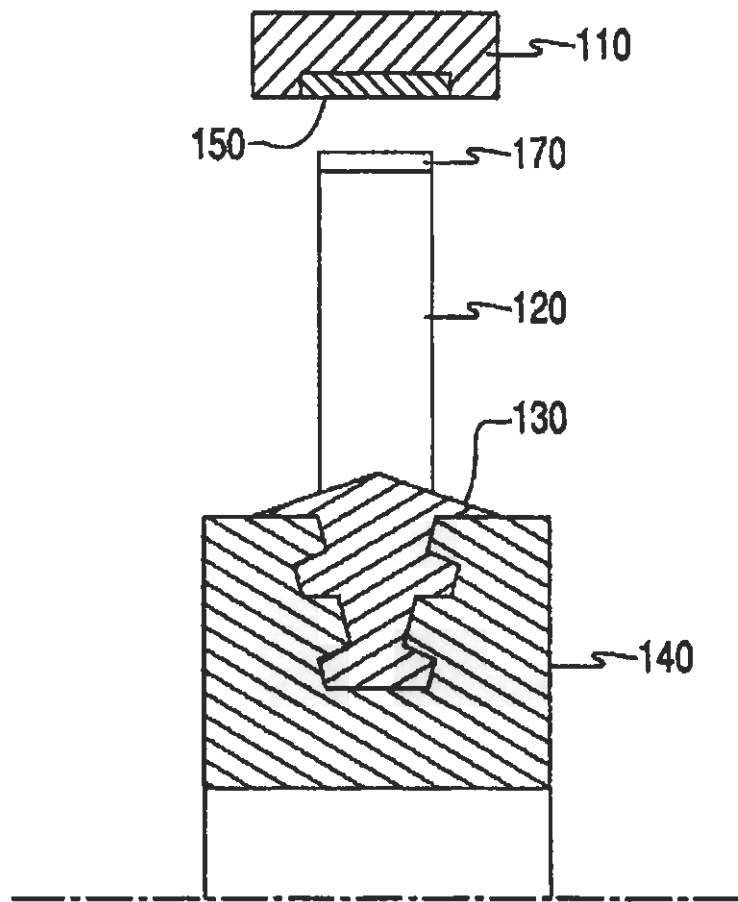

2/6

Fig. 2

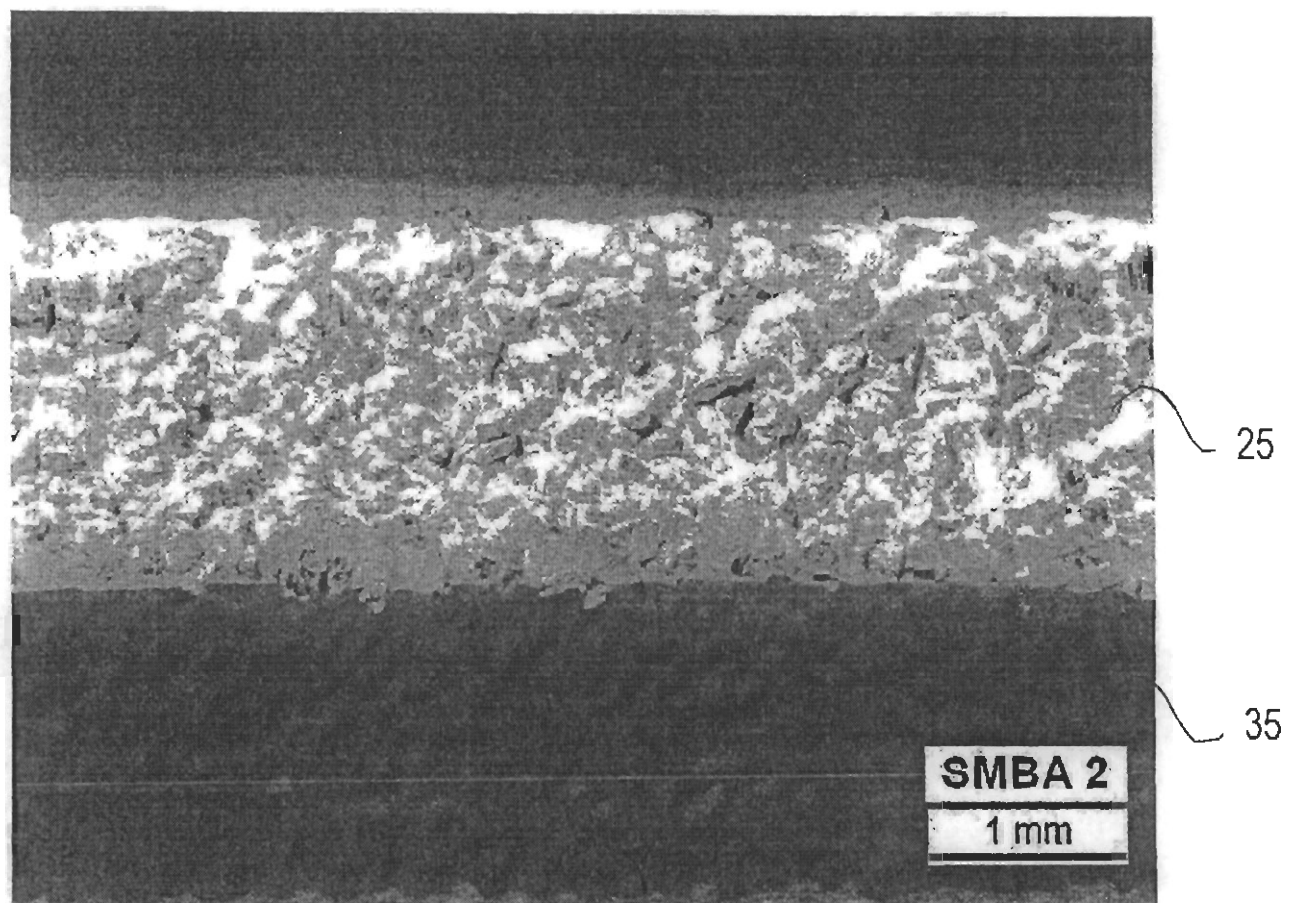


Fig. 3

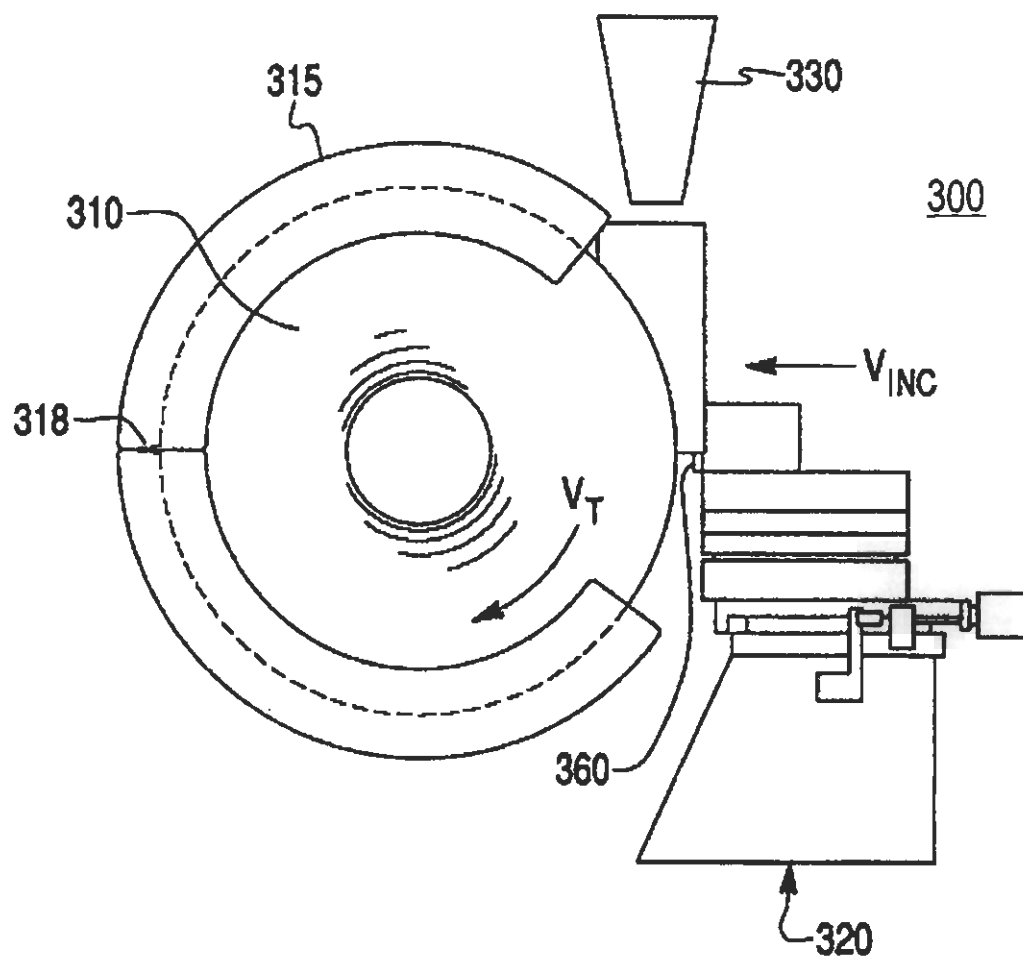


Fig. 4

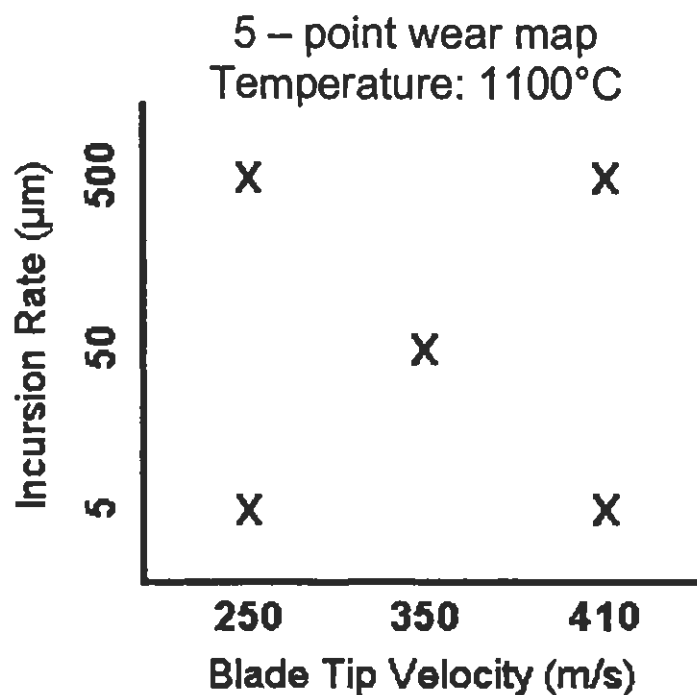


Fig. 5

Designation	Description	Function
SM 2460	8 YSZ, Polyester Spray dried product, un- reacted prior to spraying	Standard ceramic abradable
XPT 395	Standard 8 YSZ, spray- dried, HOSP treatment, blended with polyester & hBN and sprayed	Standard ceramic abradable
Al ₂ O ₃ doped	Standard 8 YSZ with alumina addition, spray dried, HOSP treatment, blended with polyester and sprayed	Alumina: erosion resistance

Fig. 6

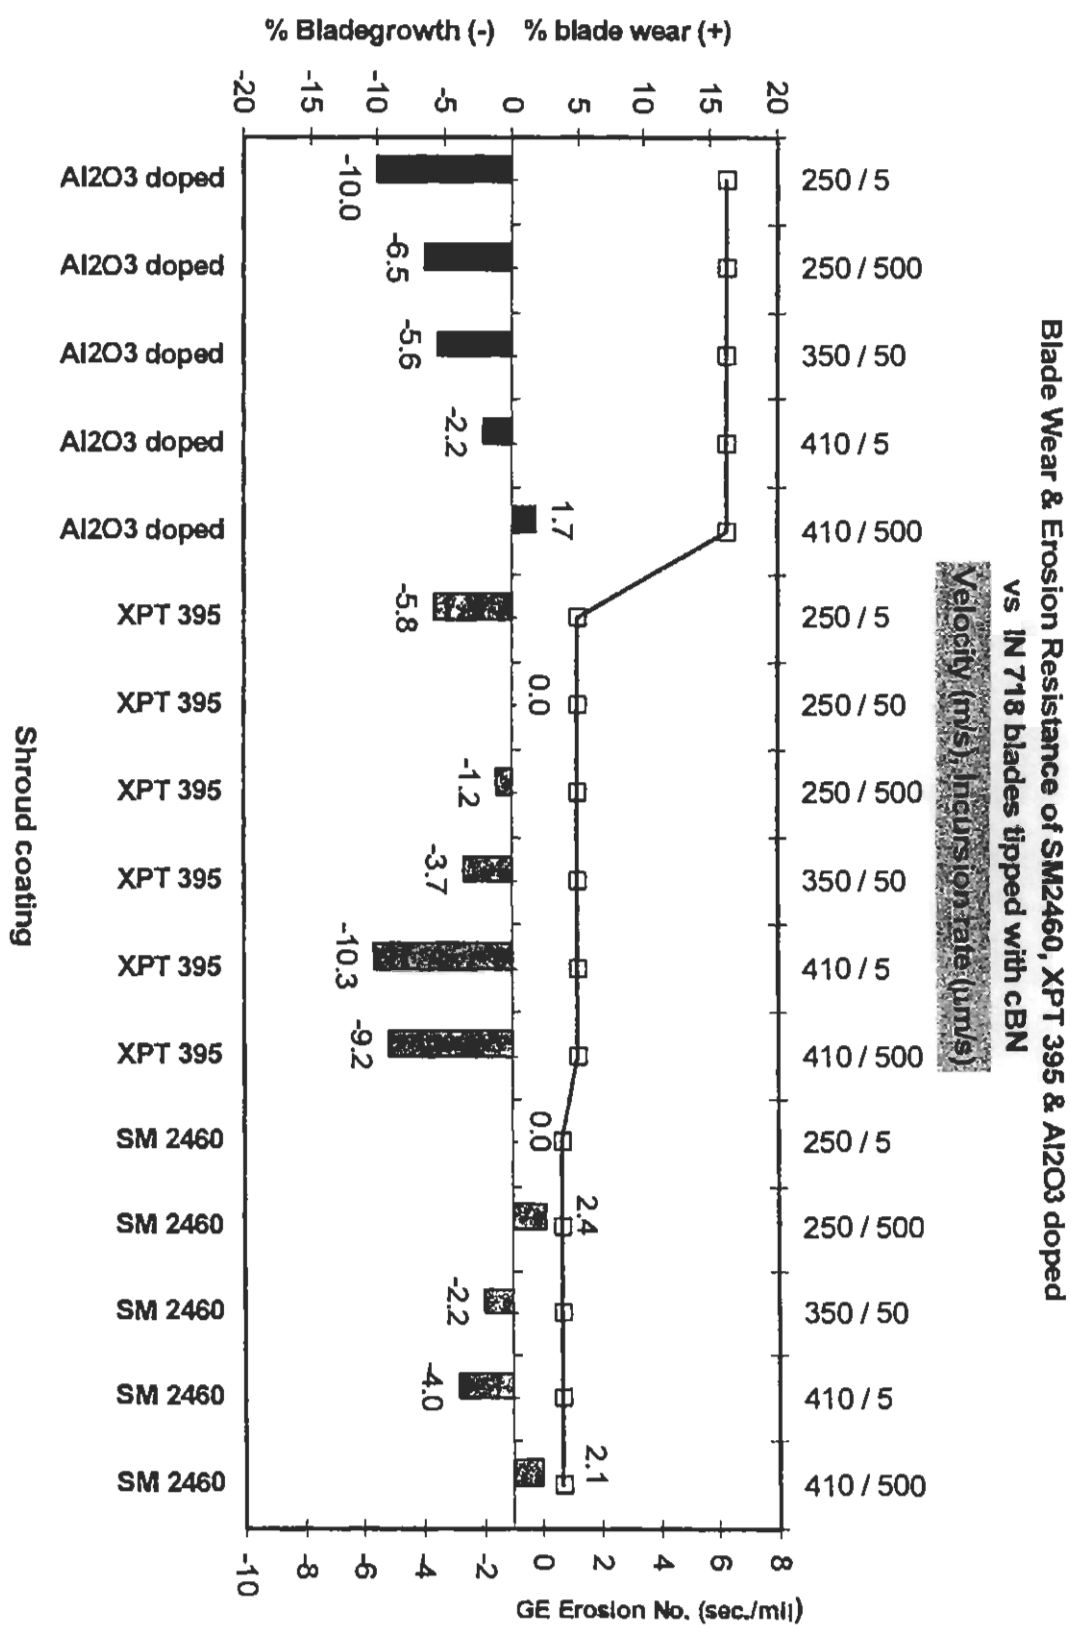


Fig. 7

