IPOS COPY 9803586-3

PCT WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : G11B 7/09, 7/095, 7/007 — A1

(11) International Publication Number: WO 97/26651

(43) International Publication Date: 24 July 1997 (24.07.97)

(21) International Application Number: PCT/JP96/00048

(22) International Filing Date: 16 January 1996 (16.01.96)

(71) Applicant: MATSUSHITA ELECTRIC INDUSTRIAL CO., LTD. [JP/JP]; 1006, Oaza Kadoma, Kadoma-shi, Osaka 571 (JP).


(72) Inventors: SHIMADA, Toshiyuki; 4-38-410, Sengokunishi-machi, Kadoma-shi, Osaka 651-15 (JP). SHOJI, Mamoru; Takatsukiryo 511, 7-1, Miyano-cho, Takatsuki-shi, Osaka 569 (JP). ISHIDA, Takashi; 13-14, Hashimotoisoku, Yawata-shi, Kyoto 614 (JP). OHARA, Shunji; 218, Shinjo, Higashiosaka-shi, Osaka 578 (JP).

(74) Agents: AOYAMA, Tamotsu et al.; Aoyama & Partners, IMP Building, 3-7, Shiromi 1-chome, Chuo-ku, Osaka-shi, Osaka 540 (JP).

(81) Designated States: CN, KR, MX, SG, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Published
With international search report.

(54) Title: OPTICAL DISK APPARATUS

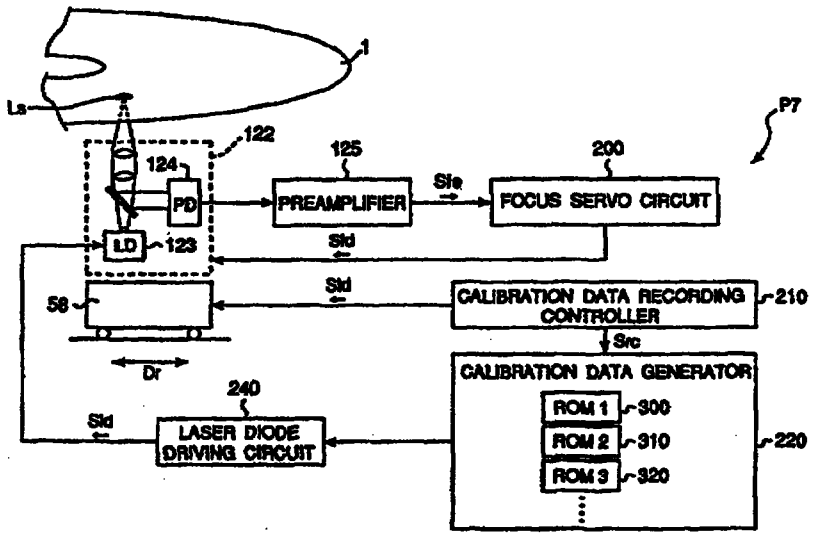

(57) Abstract

An optical disk apparatus (P7) for reproducing a signal (Sd) from a recording track formed in an optical disk (1) by focusing a light spot (Ls) on said recording track includes a calibration data generator (220). The calibration data generator (220) having a plurality of a ROMs (300) storing various calibration patterns (SP and SR) for causing said reproduced signal (Sd) to jitter. A calibration data recording controller (210) control the calibration data generator (220) to selectively output a specific calibration pattern (SP) to the optical pickup unit (Os) to record said specific pattern (SP) to a calibration data track area (23) of the optical disk (1).