



(10) International Publication Number
WO 2009/118913 A1

(43) International Publication Date
1 October 2009 (01.10.2009)

PCT

(51) International Patent Classification:
B41J 2/175 (2006.01)

(21) International Application Number: PCT/JP2008/056271

(22) **International Filing Date:** 25 March 2008 (25.03.2008)

(25) Filing Language: English

(26) **Publication Language:** English

(71) **Applicant** (*for all designated States except US*):
BROTHER KOGYO KABUSHIKI KAISHA [JP/JP];
 15-1, Naeshiro-cho, Mizuho-ku, Nagoya-shi, Aichi,
 4678561 (JP).

(72) **Inventors; and**

(75) **Inventors/Applicants (for US only): HATTORI, Shingo**
[JP/JP]; c/o Intellectual Property Dept., Brother Kogyo
Kabushiki Kaisha, 1-1-1, Kawagishi, Mizuho-ku,
Nagoya-shi, Aichi, 4678562 (JP). **SUGAHARA, Hiroto**
[JP/JP]; c/o Intellectual Property Dept., Brother Kogyo
Kabushiki Kaisha, 1-1-1, Kawagishi, Mizuho-ku,
Nagoya-shi, Aichi, 4678562 (JP).

(74) **Agents:** KITAZAWA, Kazuhiro et al.; 6F, First Genesis Bldg., 31-14, Yushima 2-chome, Bunkyo-ku, Tokyo, 1130034 (JP).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: INK CARTRIDGE

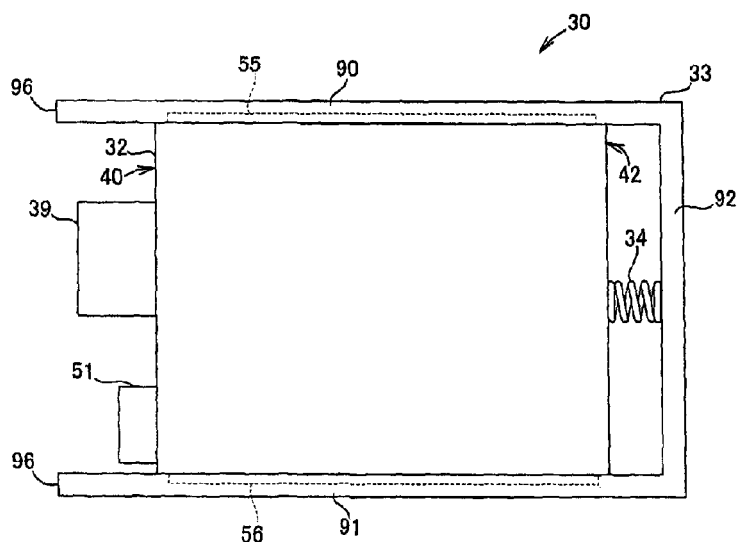


FIG.2(b)

(57) Abstract: An ink cartridge includes a case, an ink supply portion positioned at a front face of the case, a movable member configured to move relative to the case, and at least one resilient member coupled to a rear face of the case and the movable member. The at least one resilient member is configured to expand in an expansion direction and to contract in a contraction direction to move the movable member relative to the case, and a shape of the case in the expansion and contraction directions is unaltered. The entire moveable member is configured to substantially simultaneously move relative to the case when the at least one resilient member expands and contracts.