


1/7

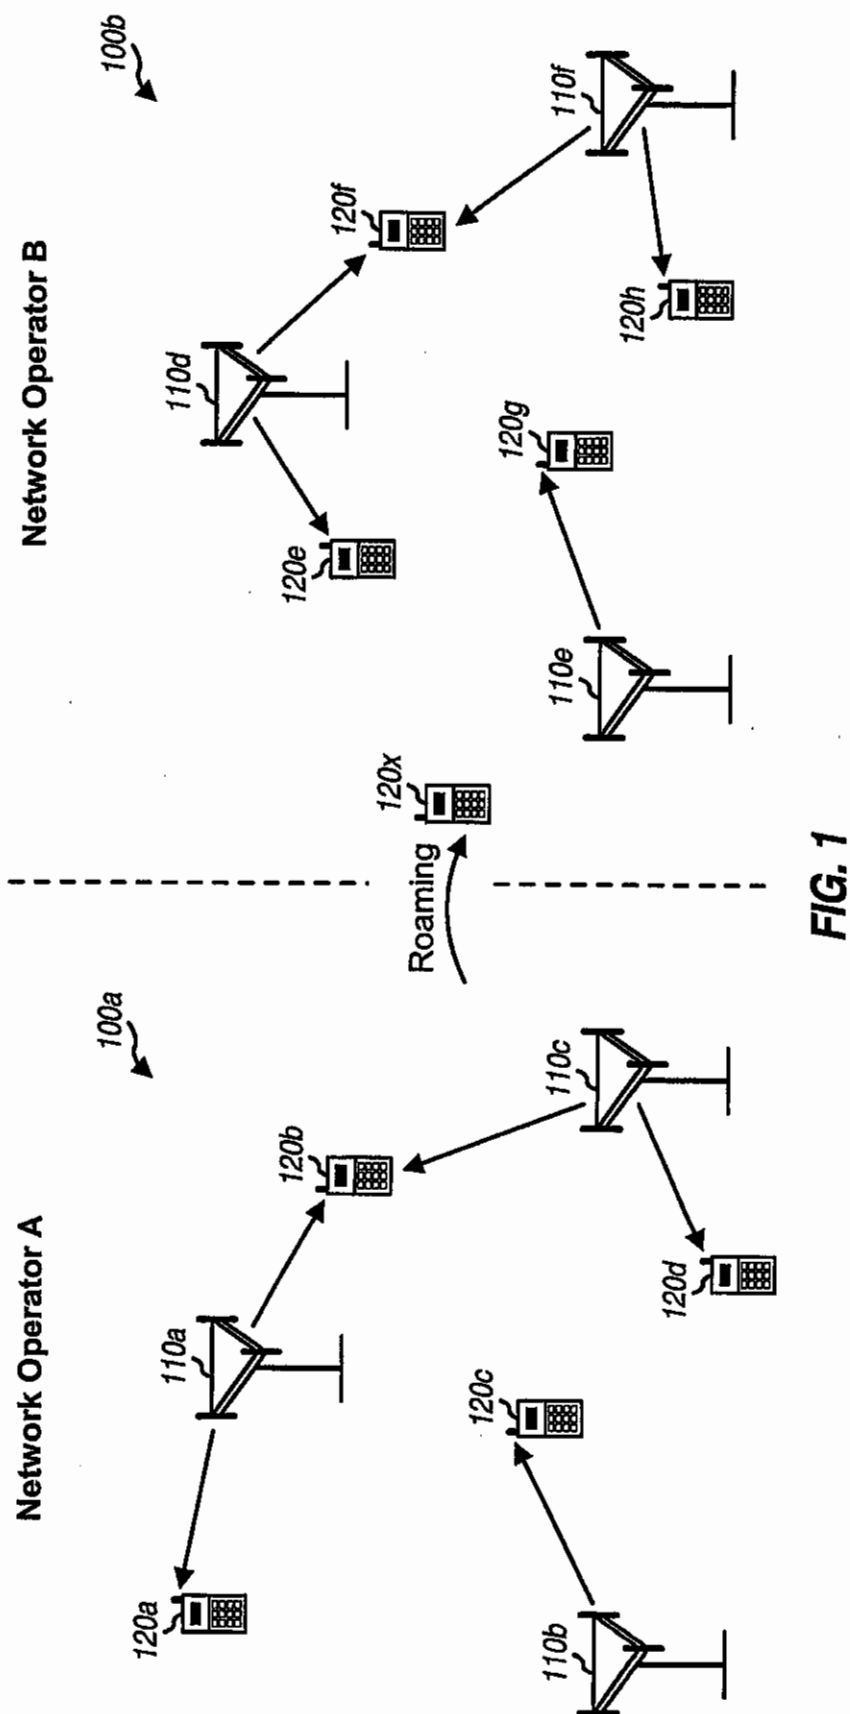

PREFERRED ROAMING LIST
(PRL) STRUCTURE

200

SYSTEM TABLE

210				
GEO L		GEO 3	GEO 2	GEO 1
Permitted Systems 220	System (SID, NID)	Selection Preference	Roaming Indicator	Acquisition Index
	SID/NID	First	Off	0
	SID/NID	Second	On	1
	SID/NID	Second	On	2
	SID/NID	Third	Flashing	4
Forbidden Systems 230	SID/NID	-	-	-
	SID/NID	-	-	-
	SID/NID	-	-	-

ACQUISITION TABLE

250

Index	Network Type	Channels /Blocks
0	Cellular CDMA (Standard Channels)	B
1	Cellular CDMA (Standard Channels)	A
2	Cellular Analog	A
3	Cellular Analog	B
4	PCS CDMA (Using Channels)	425
5	PCS CDMA (Using Blocks)	F

2/7

FIG. 2

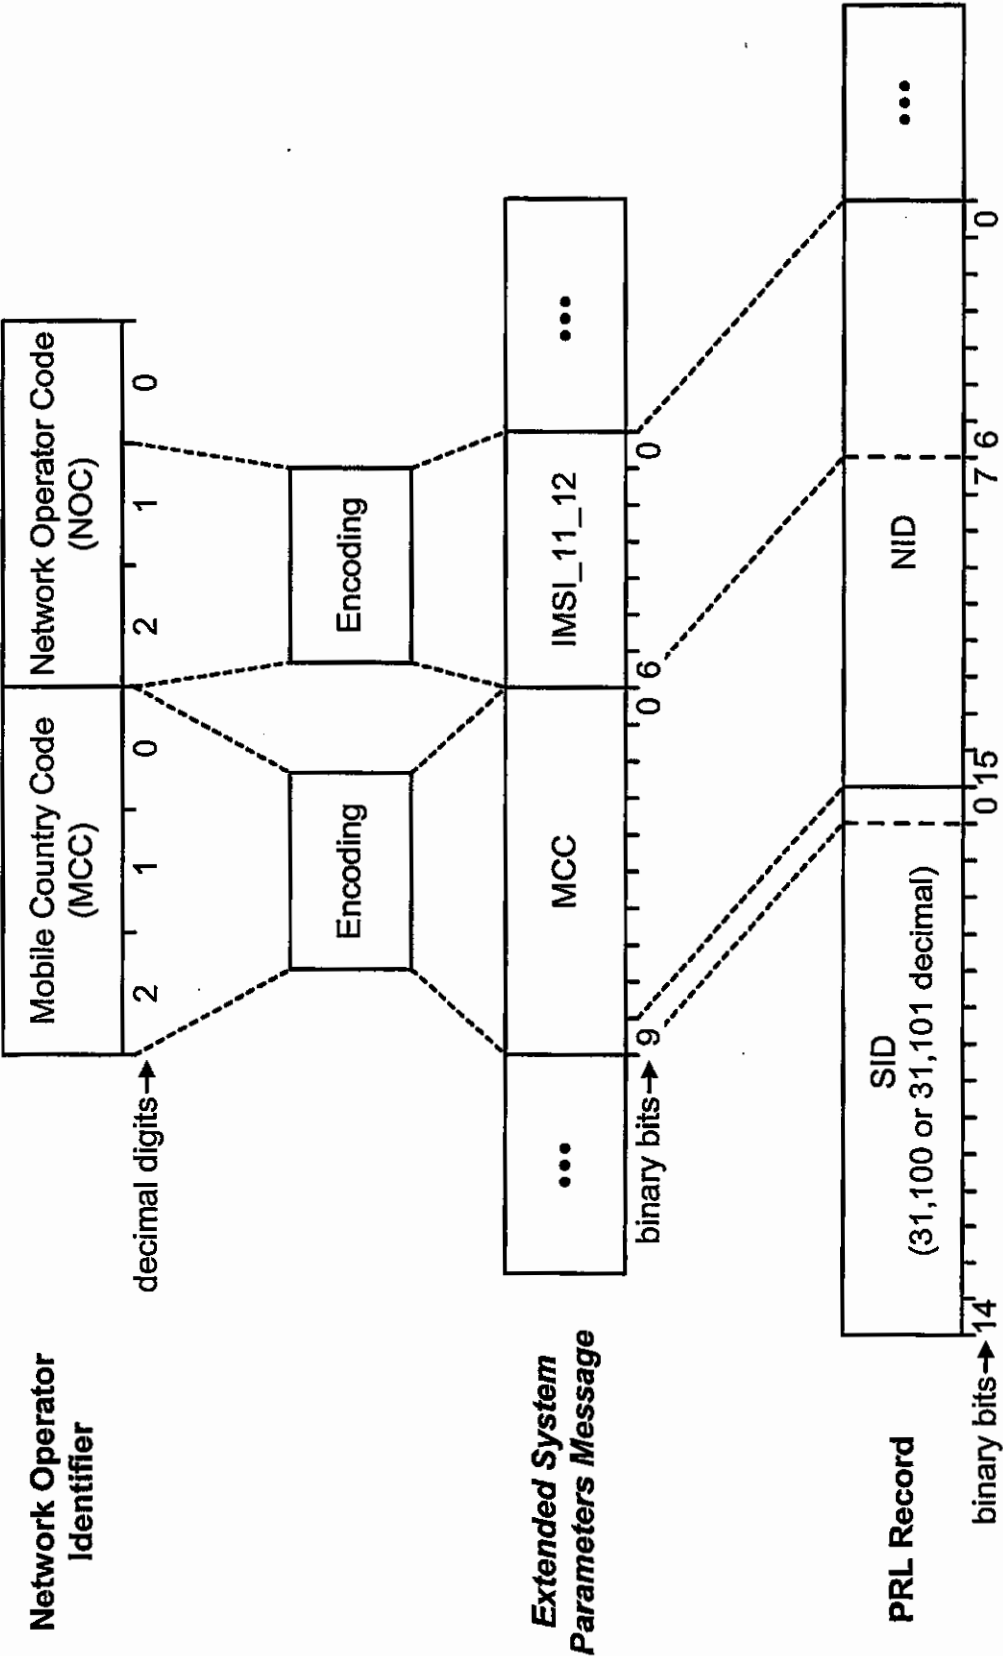


FIG. 3

4/7

SYSTEM TABLE

210x				
GEO L GEO 3 GEO 2 GEO 1				
Permitted Systems 220	System (SID, NID)	Selection Preference	Roaming Indicator	Acquisition Index
	31100,4632	First	Off	0
	SID/NID	Second	On	1
	SID/NID	Second	On	2
	SID/NID	Third	Flashing	4
Forbidden Systems 230	SID/NID	-	-	-
	31101,44556	-	-	-
	SID/NID	-	-	-

FIG. 4

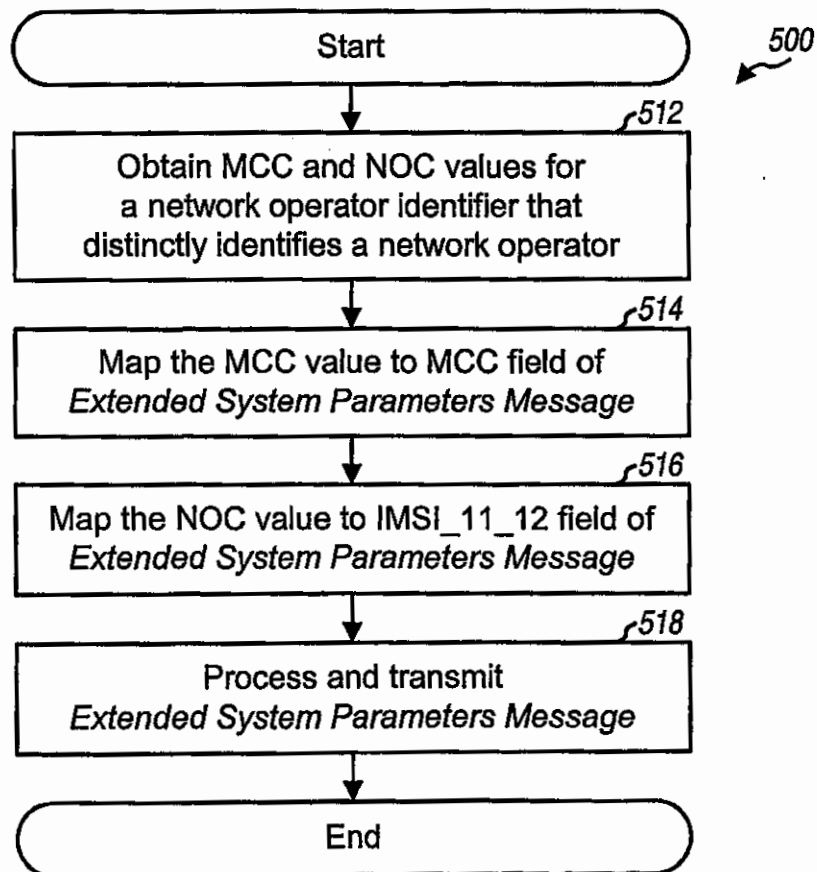


FIG. 5

5/7

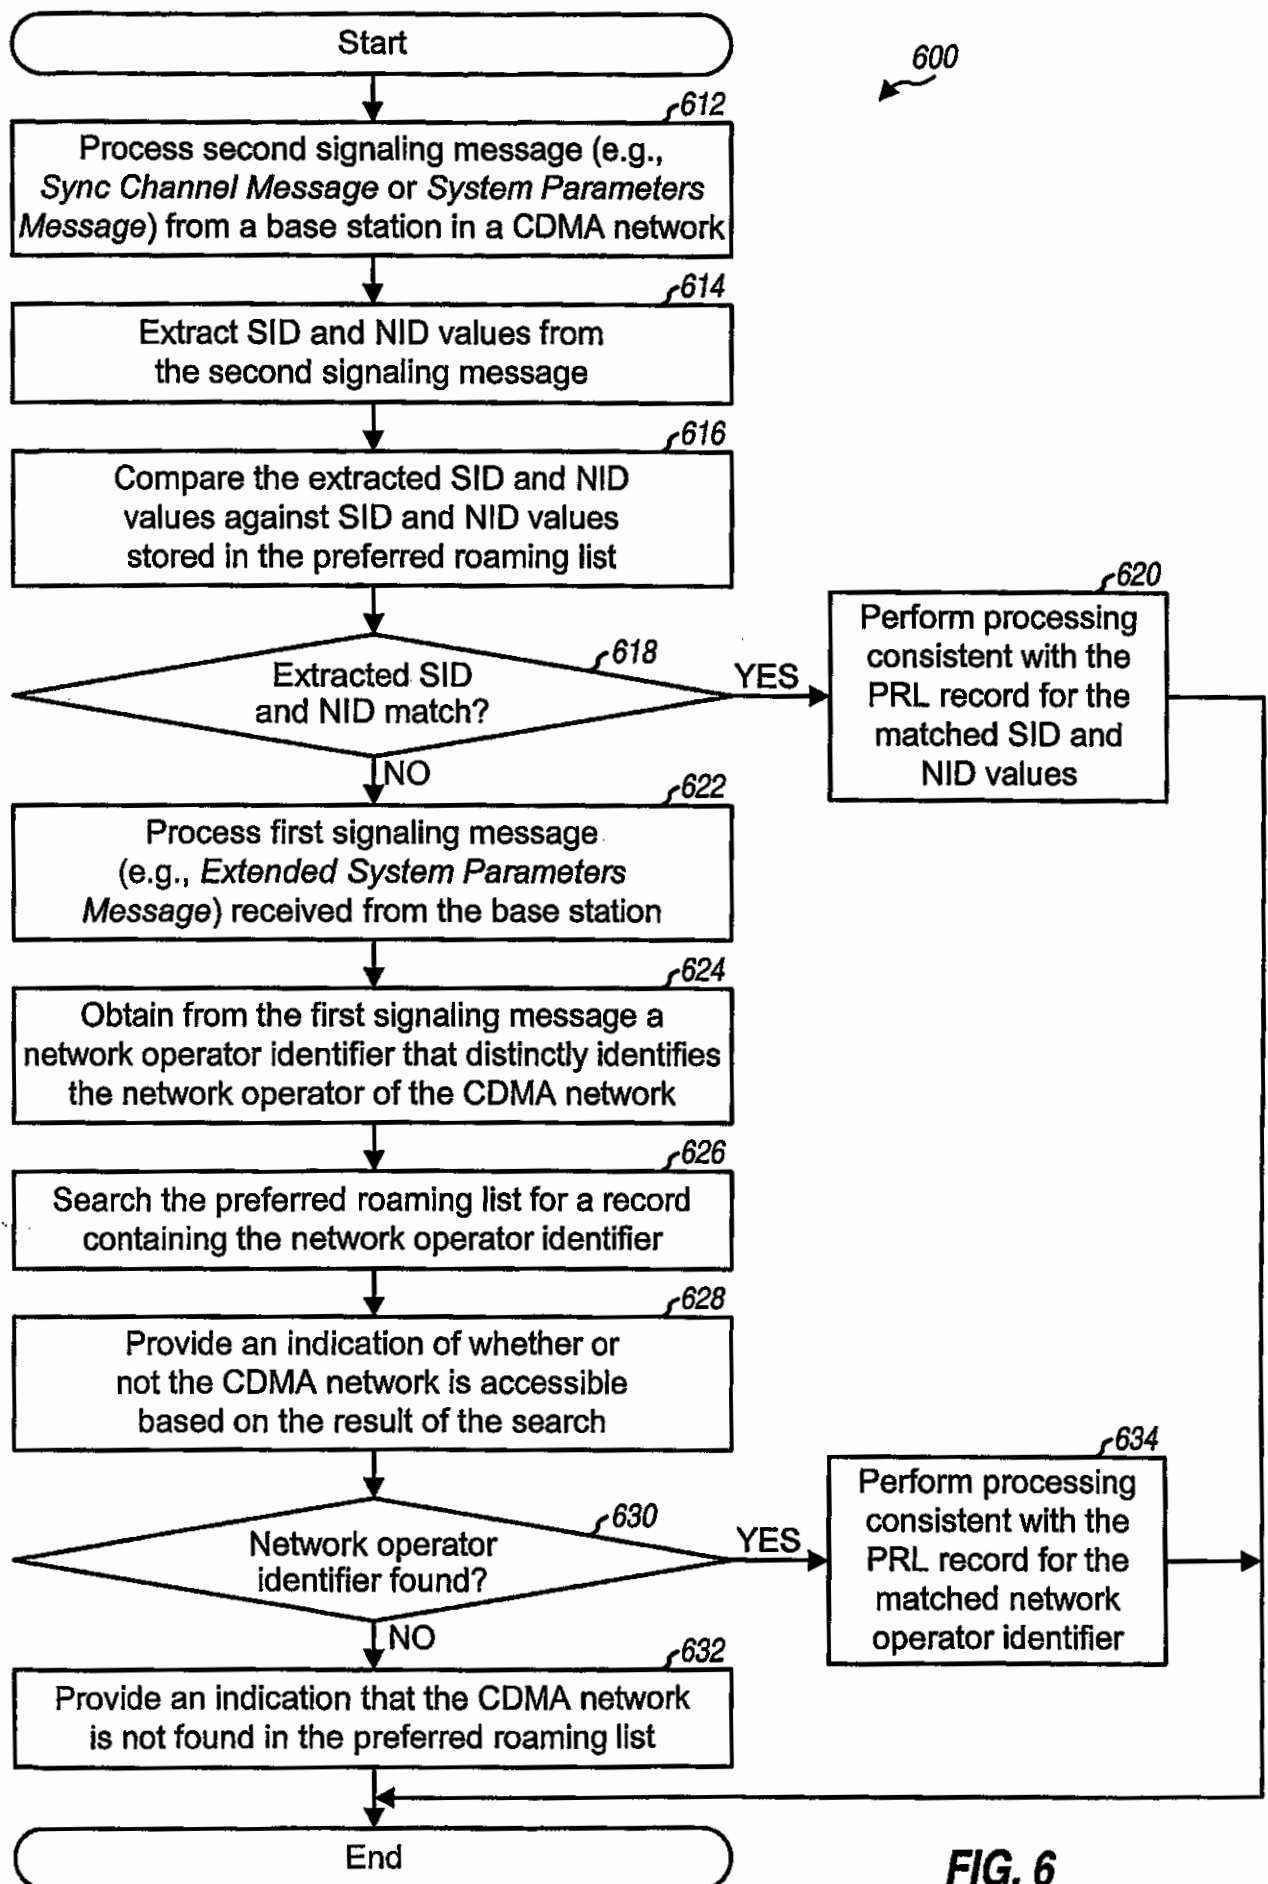
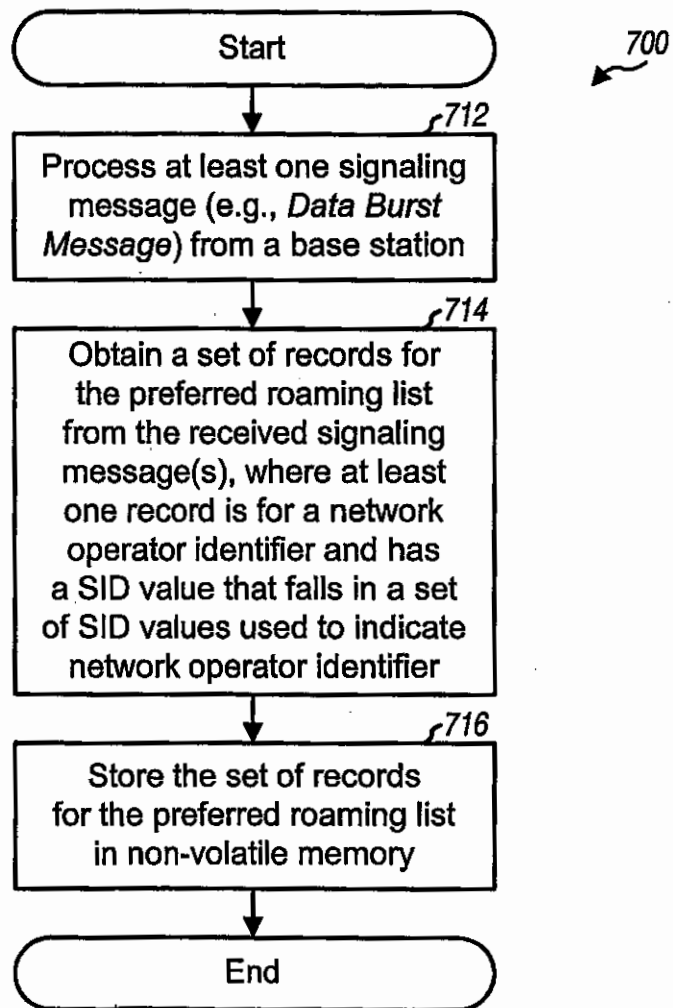


FIG. 6

6/7

**FIG. 7**

7/7

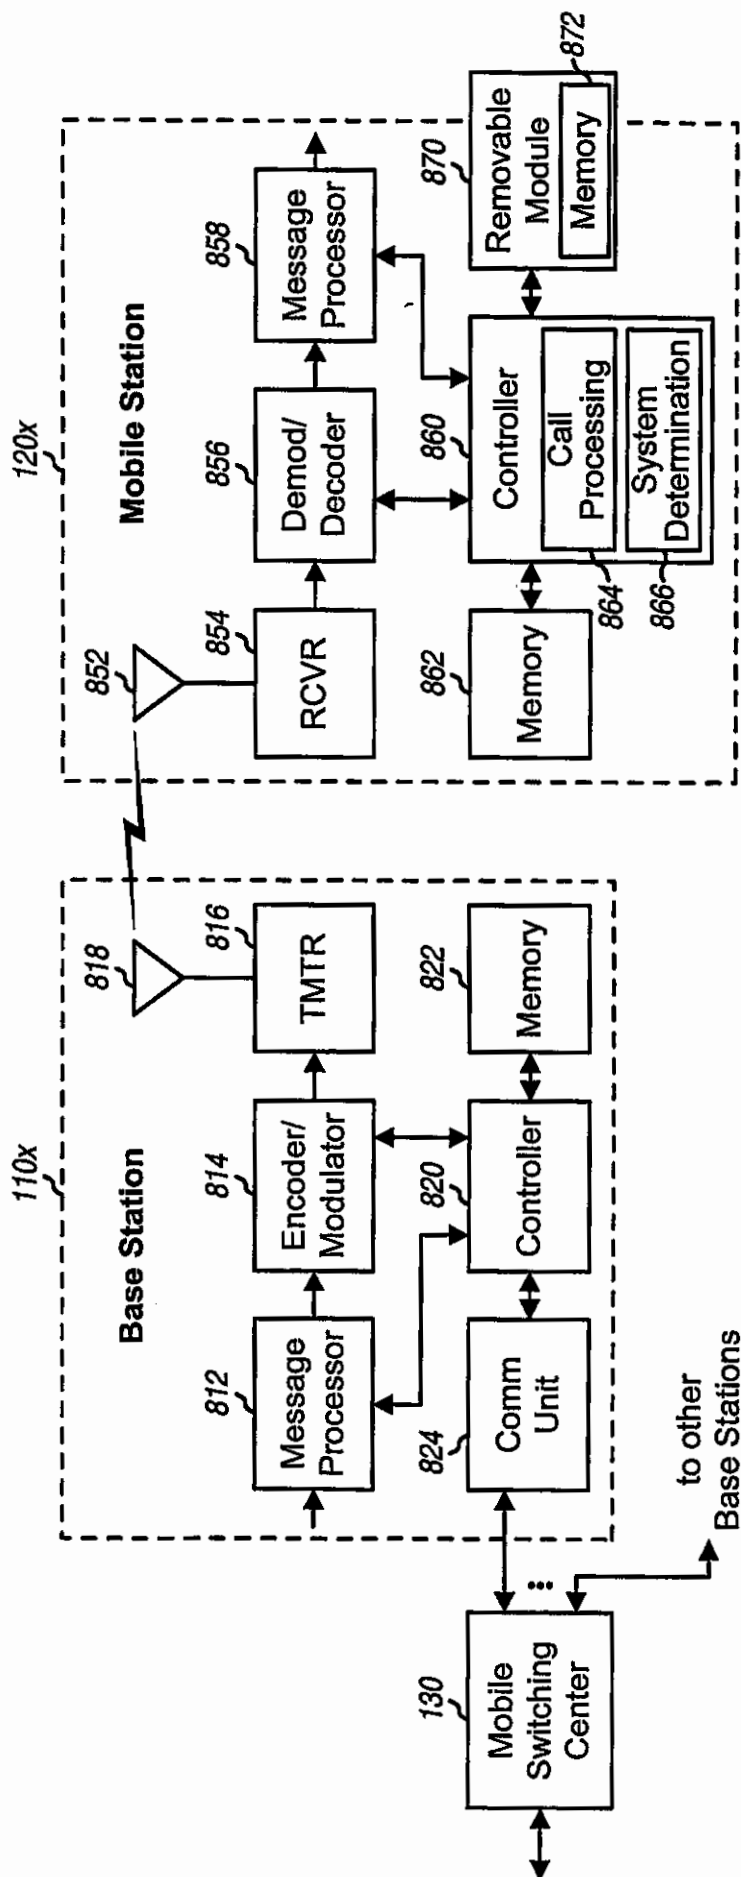


FIG. 8