

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
1 May 2003 (01.05.2003)


PCT

(10) International Publication Number
WO 03/035448 A1

- (51) International Patent Classification⁷: **B62B 7/14** (74) Agent: OSLO PATENTKONTOR AS; P.O. Box 7007 M, N-0306 Oslo (NO).
- (21) International Application Number: PCT/NO02/00382
- (22) International Filing Date: 22 October 2002 (22.10.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
20015159 22 October 2001 (22.10.2001) NO
- (71) Applicant (for all designated States except US): STOKKE GRUPPEN AS [NO/NO]; Håhjem, N-6260 Skodje (NO).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): REFSUM, Bjørn [NO/NO]; Fjellgata 73, N-6007 Ålesund (NO).
- (81) Designated States (*national*): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK (utility model), SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK,

[Continued on next page]

(54) Title: TROLLEY

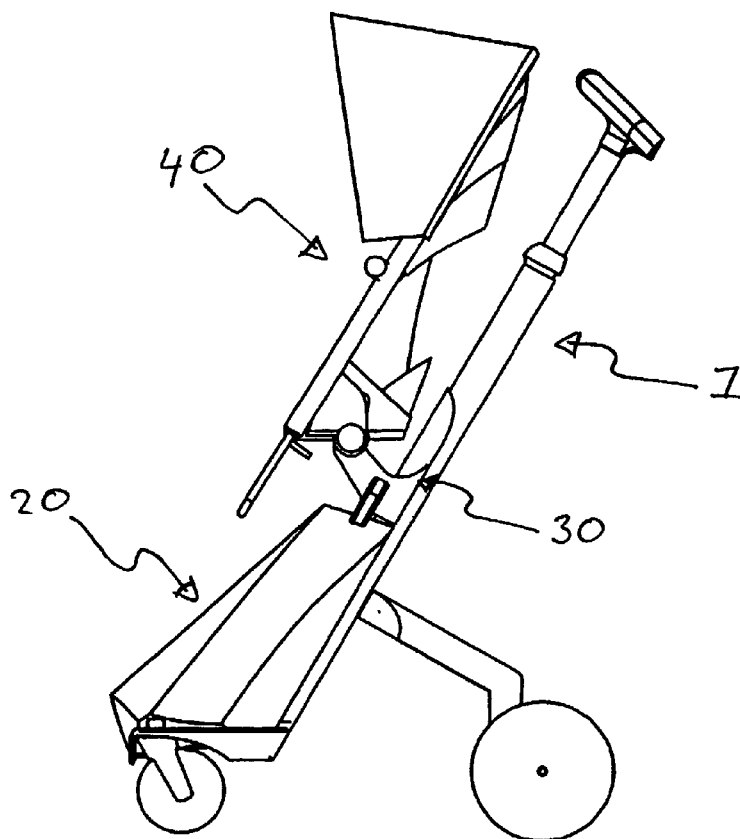

(57) Abstract: The invention comprises a trolley with an frame (1) with wheels (10, 11) and at least one handle (5), which is characterised in that the frame (1) comprises: a main supporting rod (2), equipped with the handle (5) at the upper end, and at least one wheel (11) at the lower end; a sub-supporting rod (7), fastened at its upper end to the main supporting rod (2) between the extreme ends of the main supporting rod, and equipped with at least one wheel (10) at the lower end; and wherein the wheels (11) are fastened to the main supporting rod via a first crosspiece (4) and/or where the wheels (10) are fastened to the sub-supporting rod via a second crosspiece (9).

WO 03/035448 A1



TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, — *with amended claims*
GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:

— *of inventorship (Rule 4.17(iv)) for US only*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*