



(51) International Patent Classification:
H02B 1/20 (2006.01)

(21) International Application Number:
PCT/CN2009/071753

(22) International Filing Date:
12 May 2009 (12.05.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
200810128761.X 12 May 2008 (12.05.2008) CN

(71) Applicant (for all designated States except US): **ADC COMMUNICATIONS (SHANGHAI) CO., LTD.** [CN/CN]; No.16, 3679 Jindu Road, Xin Zhuang Industrial Zone, Shanghai 201108 (CN).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **ZHANG, Li** [CN/CN]; Room 603, No.136, Lane 667, Ziwei Road, Pudong District, Shanghai 201203 (CN). **LENG, Zong-sheng** [CN/CN]; Room 501, No.11, Lane 189, Qiujiing Road, Songjiang District, Shanghai 201615 (CN). **CUI, Peng** [CN/CN]; Room 203, Unit 3, Building No.3, Street Xinhua, Yinzhou District, Tieling, Liaoning 112000

(CN). **CHAN, Thomas** [SG/SG]; 100C, St. Patrick's Road, Singapore 424191 (SG).

(74) Agent: **NTD PATENT & TRADEMARK AGENCY LIMITED BEIJING OFFICE**; 10th Floor, Block A, Investment Plaza, 27 Jinrongdajie, Xicheng District, Beijing 100140 (CN).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR),

[Continued on next page]

(54) Title: CABLE MANAGEMENT PANEL

FIG.3

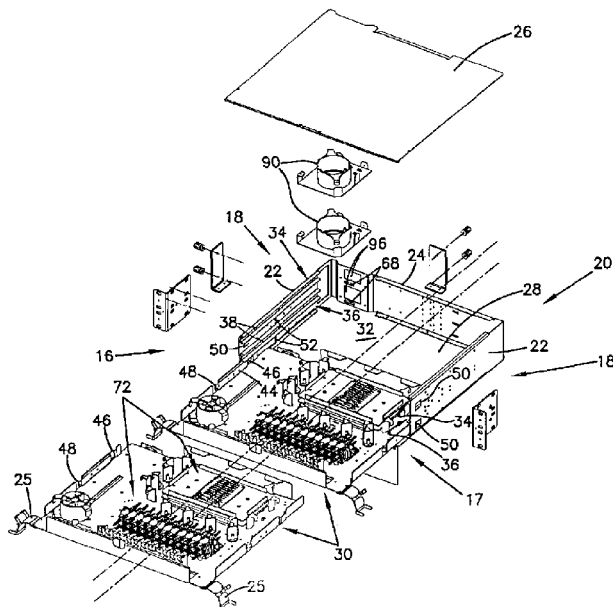

(57) Abstract: A cable management panel has a chassis (12) and a sliding drawer (30). The drawer has a cable storage region, a cable splice region, and a cable termination region. The cable management panel includes cable guides (92, 94) that define an incoming cable pathway to the cable storage region and then to the cable splice region, an intermediate cable pathway to the cable termination region, and an outgoing cable pathway. The outgoing cable pathway has an S-curved cable routing configuration when the sliding drawer is closed. The chassis of the cable management panel defines an interior (32) sized for receipt of one two-rack-unit drawer, or in the alternative, two one-rack-unit drawers. Cables can enter into or exit from the interior of the chassis.

WO 2009/138029 A1



OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG). **Published:**

— *with international search report (Art. 21(3))*