

1PDS  
copy

9609487-5

1

Nozzle ✓

The present invention relates to a nozzle.

The object of the invention is to provide a new  
5 nozzle which in particular is suitable for use in such  
spray heads which are capable of operating at a high  
driving liquid pressure.

The nozzle according to the invention is mainly  
10 characterized by a helical spring arranged before the  
orifice of the nozzle in such a way that liquid is  
made to flow in a helical path between the loops of  
the spring, in order to set the liquid in a strong  
whirling motion before being discharged through the  
orifice.

15 Preferably the helical spring is positioned  
around a spindle element insertable into an at least  
essentially cylindrical passage in the housing of the  
nozzle.

20 As the operating pressure decreases, the spring  
expands gradually, whereat the pin follows along and  
is removed from its bottom position near the orifice  
of the nozzle. This results in a decreasing flow  
resistance before the nozzle orifice, partly because  
25 the distance increases between adjacent loops of the  
helical spring and the cross section of the helical  
flow path thus increases, and partly because the axial  
length of the helical path becomes shorter.

30 Thus the amount of discharged liquid per time  
unit will remain essentially constant in spite of  
variations in the operating pressure. In many cases it  
is of advantage to employ one or several hydraulic  
accumulators as drive unit for the liquid, whereat an  
essentially constant rate of liquid spray can be  
35 obtained in spite of a decreasing operating pressure  
as the hydraulic accumulators gradually are  
discharged.

This Sheet Has Been Replaced



| REPLACED SHEETS                     |                                                             | SG |
|-------------------------------------|-------------------------------------------------------------|----|
| <input checked="" type="checkbox"/> | Description : paged ..... 1 ..... to paged ..... 11 .....   |    |
| <input checked="" type="checkbox"/> | Claim(s) : paged ..... 12 ..... to paged ..... 13 .....     |    |
| <input checked="" type="checkbox"/> | Drawing(s) : paged ..... 1/3 ..... to paged ..... 3/3 ..... |    |
| <input checked="" type="checkbox"/> | Abstract : paged ..... 14 ..... to paged ..... .....        |    |
| DATE OF RECEIPT .....               |                                                             |    |

In the following the invention shall be described in more detail with reference to the attached drawing which, by way of example, show a number of preferred emodiments.

5           Figure 1 shows an axial section of a spray head with a first embodiment of nozzles according to the present invention.

          Figures 2, 3 and 4 show in an enlarged scale an axial section of an individual nozzle of figure 1, under the influence of different liquid pressures.

10           Figure 5 shows an axial section of a spray head with a second embodiment of nozzles according to the present invention.

          Figures 6 and 7 show in an enlarged scale an axial section of the central nozzle of figure 5, under the influence of two different liquid pressures.

          Figures 8 and 9 show in an enlarged scale an axial section of the side nozzles of figure 5, under the influence of two different liquid pressures.

20           Figures 10-14 show an alternative nozzle embodiment applied on a nozzle centrally arranged in the spray head, under the influence of different liquid pressures.

          Figure 15 shows nozzles according to figures 1-4 mounted in a spray head provided with a release ampoule.

          In the drawing the reference numeral 1 indicates a housing of a spray head with an inlet 2 for liquid, preferably of a high pressure, even up to about 300 bar. The inlet 2 continues as an axial channel 3 which in figure 1 leads to a centrally arranged nozzle 4 and from which lead branch channels 5 to side nozzles 6 directed obliquely outwards. The central nozzle 4 and the side nozzles 6 in figure 1 are a first preferred embodiment of the invention and shall in the following be described in more detail with reference to figures



2, 3 and 4 which show a side nozzle 6.

5 The nozzle 6 has a body or holder 7 which by means of a thread 8 is screwed in a seat joining a branch channel 5 in the housing 1 of the spray head. Through the holder 7 runs a connection which, seen in the direction from the channel 5, has a cylindrical portion the wall of which is indicated by 9 and which ends at an annular stop 10, and a conically narrowing portion with a whirl chamber element 11 which defines a conically narrowing whirl chamber 12 and an orifice 13.

10 Between the inner end of the holder 7 and a stop 14 formed in the nozzle seat is arranged a filter, preferably a disc-like sintered metal filter 15 having a central opening through which is entered an end pin 16 of a spindle having a cylindrical portion 17 reaching into the cylindrical passage of the holder 7 and terminating in an end surface 18 matching the conical surface of the whirl chamber 12 and provided with e.g. two to four oblique grooves 19.

20 Around cylindrical portion 17 of the spindle is laid a helical spring 20 with one end bearing against the stop 10 and/or the inner end of the whirl chamber element 11 or the wall of the whirl chamber 12 and the other end bearing against a flange 21 of the spindle said flange 21 in turn bearing against the filter 15. The spring 20 thus tends to press the spindle away from the whirl chamber 12 and to press the filter 15 against the stop 14. The diameter of the flange 21 is a little smaller than the diameter of the cylindrical passage, at 9, of the holder 7, so that there is an annular passage 22 between the flange 21 and the wall 9, when the spindle is driven against the (bottom) wall of the whirl chamber 12, as shown in figure 3.

35 Along the annular space between the cylindrical spindle portion 17 and the wall 9 of the cylindrical



passage is formed a helical path 23 along and between the loops of the spring 20; the spindle portion 17 and the spring 20 are preferably of such dimensions that practically all of the passing liquid follows the helical path 23, and thereby the liquid is given a strong whirling motion in the whirl chamber 12 and further out through the orifice 13.

In figure 2 the spray head is either inactive or the active liquid pressure is so low that the spring 20 forces the filter 15 into abutment against the stop 14. The spring 20 is relatively expanded and the cross section of the helical path 23 is relatively wide. There is a gap 24 between the filter 15 and the end of the holder 7. A preferably conical extension 26 of the pin element 16 reaches into the inlet channel 5 and closes the orifice of the channel 5. That surface of the flange 21, against which the spring 20 bears, is essentially level with the inner end of the holder 7.

In figure 3 the spray head is activated and the liquid pressure is high. The pressure fall especially over the annular gap 27 between the cone 26 and the surrounding edge of the orifice of the inlet channel 5 and over the annular passage 22 between the flange 21 and the holder wall 9, and to some extent also over the filter 15 and the helical path 23, is so great that the spring 20 is compressed until the filter 15 hits the holder 7, and thereafter the spindle continues the movement on its own, because of the pressure fall over the annular passages 27 and 22. The end surface 18 of the spindle reaches down into contact with the whirl chamber bottom wall and thus the helical path 23 is much narrower than in figure 2. A violently whirling fog-like liquid spray is discharged through the orifice 13.

For spray heads contemplated in the present patent application it is often convenient to utilize



one or a plurality of hydraulic accumulators as a drive unit and a source of liquid.

5 The driving gas pressure, and thus the liquid pressure, will gradually fall to a value so low that the spring 20 forces the spindle loose from the whirl chamber element 11. The pressure falls especially over the annular passage 22 and over the annular gap 27 now balance the spring 20. As the drive pressure continues to fall, the spring 20 expands further until the  
10 conical extension eventually blocks the inlet channel 5, whereat the filter 15 is close at or against the stop 14.

In the state of figure 4, a desired centered positioning of the spindle is, in spite of the  
15 lateral, or radial clearance between the filter 15 and the stop 14 and the clearance 25 between the pin element 16 and the filter 15, ensured by means of the conical extension 26 of the pin element 16. A centered position is desirable in order to obtain an even width  
20 for the annular passages 22 and 27 all around and thus to obtain an essentially predeterminable flow resistance through these passages. The liquid flow past the cone 26 automatically centers the spindle structure. It should be noted, however, that a  
25 satisfactory result can be achieved in many cases also without an extension 26, i.e. with the pin element ending at or slightly above the filter 15, e.g. as the pin element 32 in figures 5-7.

By varying the axial length of the cylindrical  
30 pin element 16 and/or the tapering angle of the extension 26 it is possible to close the inlet 5 at a predeterminable liquid pressure as the spring 20 with decreasing drive pressure gradually expands from the state of figure 3 through the state of figure 4 back  
35 to the state of figure 2. In the embodiment of figures 1-4 the extension 26 closes the inlet 5 just before or



just as the filter 15 contacts the stop 14. The extension 26 may of course alternatively have the general form of a truncated cone. If the grooves 19 are omitted, the nozzle will be closed in the position of figure 3 and will open at a predeterminable decreased pressure. The filter 15 plays only a minor, deletable part in creating those pressure falls which govern the function of the nozzle, but a filter is recommendable for cleaning the liquid.

In the state of figure 4 the cross section of the helical path 23 is wider than in figure 3. The result of this is that the rate of liquid out of the orifice does not decrease in proportion to the decreasing liquid pressure but remains at a surprisingly constant rate, although the whirling motion of the liquid fog successively decreases and the droplet size increases.

The force of the spring 20, as well as the annular passages 22 and 27, can be varied according to varying considerations with respect to liquid rate, droplet sizes, desired drive pressures etc., at different stages of a fire extinguishing procedure. Different spray heads in an installation for fighting fire may be individually adapted, likewise individual nozzles in one spray head.

In the latter case it is primarily the central nozzle of a spray head, as in figure 1, that can be adapted to differ from the side nozzles, e.g. in such a way that the spring is somewhat stronger than the springs of the side nozzles, whereby it at a decreased liquid pressure is possible to for a longer time maintain a relatively forceful liquid spray or jet in the main direction. This can be utilized e.g. in a portable pistol-like fire extinguisher device as shown in the Finnish patent application No. 924119 in such a way that simultaneously with a forceful liquid jet in



the main direction, through a central nozzle, a shield of liquid fog is provided by means of the side nozzles, whereby it is possible to approach close to a violent fire developing intensive heat. Such a manually manuevrable device can without difficulties be constructed in such a way that the operating or liquid pressure can be varied as desired during the extinguishing procedure.

By means of nozzles according to the invention a particularly favourable effect is achieved when hydraulic accumulators according to the Finnish patent application No. 924752 are used as a drive unit. Such hydraulic accumulators have an outlet tube with wall apertures, so that drive gas is mixed into the extinguishing liquid after the gas pressure has decreased to a predeterminable level. In the initial stage according to figure 3 a violently whirling liquid fog with small droplets and a good penetration power is achieved, in the beginning of the stage according to figure 4 larger droplets with a good capability of cooling hot surfaces and smouldering fires is achieved, and thereafter, with gradually decreasing drive pressure and increasing amounts of intermixed gas, and gradual return to the state of figure 2, a total flooding with even smaller droplets than during the initial stage of figure 3 can be maintained for a long time.

In fire fighting installations employing a liquid pump as a drive unit, the nozzles according to the invention makes it possible to vary the mode of liquid spray during the extinguishing procedure, by varying the operating pressure of the liquid pump, or by arranging valves for throttling the liquid flow and thereby adjusting the pressure. The action range for each spray head can therefore be expanded and one can manage with fewer spray heads.



5 The embodiment shown in figures 5-9, with a central nozzle 30 and side nozzles 31, has in the central nozzle a spindle pin 32 with an axial channel 33 ending in a throttle 34. A helical spring 35 is laid around the pin 32 to form a helical flow path 36 along and between the loops of the spring 35. This embodiment produces in general a rather forceful spray that creates a suction which brings along liquid fog produced by the side nozzles 31, which can have a solid spindle pin 37 with a helical spring 35 around it to form a helical flow path 36. The pin 37 preferably has an expanded head portion 38 in order to form an annular passage 39 between the head 38 and the surrounding wall of the housing 1, for the same purpose as the extension 26 shown in figures 1-4. The head 38 may be formed to block the inlet 5 in the position of figure 8.

10 Figures 6 and 7, and 8 and 9, show, like figures 2 and 3, the situation at no or low liquid preassure and at a high liquid pressure, respectively. Naturally the situation of figure 4 occurs as well.

20 A further embodiment of the invention is shown in figures 10-14. The side nozzles 6 of the spray head are of the same kind as in figures 1-4 and the central nozzle 60 has a holder 61 screwed into the lower end of the central channel 3 of the spray head and with a whirl chamber 62 at the nozzle orifice. A helical spring 63 is at its one end supported against the wall of the whirl chamber 62 and at its other end against a thickened plunger-like portion of a spindle 64 movable in the central channel 3, said plunger-like portion forming approximately that half of the spindle which is towards the inlet of the channel 3. Between the plunger portion of the spindle 64 and the wall of the channel 3 there is an annular passage 71. Through the spindle 64 runs an axial channel 65 with a throttle 46



at its inlet and with branchings 67 to the channel 3 after the plunger portion of the spindle. The thinner portion 69 of the spindle 64, around which portion 69 the spring 63 is laid, can for the rest be massive. The loops of the spring 63 form a helical path 70 between the the spindle portion 69 and the cylindrical portion of the holder 61 screwed into the end of the channel 3.

In inactive state, as shown in figure 10, the spring 63 forces the spindle 64 to abutment against the inlet of the central channel 3. A high pressure liquid flowing through causes such a pressure drop over the throttle 66 and over the annular passage 71 between the plunger portion of the spindle 64 and the wall of the channel 3 that the spindle is driven to the bottom towards the central nozzle 60, as shown in figure 11, with the massive spindle portion 69 in abutment with its preferably conical end against the likewise conical wall of the whirl chamber 62. The spring 63 is compressed and the helical path 70 formed by the loops of the spring is narrow and continues after the end of the spring 63 in a passage 72 formed between the spindle end and the wall of the whirl chamber and leading to the nozzle orifice.

A preferable embodiment of the passage 72, which is not clearly visible in figure 11, is shown in figures 12 and 13. The conical end surface of the spindle portion 69 is indicated by 73 and a number of preferably oblique grooves, e.g. two to four grooves, in the conical surface 73 are indicated by 74. In the position of figure 12 the central nozzle 60 thus produces a violently whirling liquid fog, just as the side nozzles 6. The grooves 19 in the embodiment of figures 1-4 are preferably arranged in the same way. If the grooves 74 are omitted, that particular nozzle will be closed in the position of figure 11.



After the liquid pressure has decreased sufficiently, the spindle 64 takes a position approximately as in figure 14. In this position the the pressure drop over the annular passage 71, the  
5 throttle 66 and the helical path 70 balances the force of the spring 63. The helical path 70 is now wider as in figure 12, and the feed channels 5 to the side nozzles 6 are essentially blocked by the plunger portion of the spindle 64. Most of the liquid is now  
10 discharged through the central nozzle 60 as a forceful concentrated spray.

An effective pressure fall in the state of figure 14 can alternatively be brought about by means of the annular passage 71 alone, i.e. with the  
15 throttle 66 blocked. The annular passage 71 would then be wider and would permit a correspondingly freer connection to the side nozzles in figure 14.

In general the embodiment of figures 10-14 provides for a wide variation range with respect to  
20 droplet sizes through the central nozzle 60, because the movement of the spring 63 is proportionally long with a correspondingly wide variation of the cross section of the helical path 70. Consequently, the action range of the central liquid jet is long in the  
25 figure 14 position.

Figure 15 shows a spray head with a number of side nozzles of the same kind as in figures 1-4. In the position of the earlier described central nozzles there is arranged a holder 100 for a release ampoule  
30 101 which melts or breaks at a certain risen temperature. A spindle 102 positioned in the central channel 3 of the spray head is arranged to be forced by a helical spring 103 against the ampoule 101 with a force which alone is not capable of breaking the  
35 ampoule but which after the ampoule has melt or broken drives the spindle 102 downwards from the position of



figure 15 and thereby opens liquid connections from the spray head inlet to the side nozzles 6.

5 The spindle 102 has an axial channel 104 starting from the end at the inlet 2 and via branchings 85 ending into an annular chamber 106 between the wall of the channel 3 and the opposite end part 107 of the spindle 102, said end part 107 being inserted into the ampoule holder 100 in sealed relation thereto. Towards the inlet end of the spindle 102, the annular chamber 106 ends in a plunger portion 88 sealed in relation to the wall of the channel 3. The annular surface 109 formed by the plunger 108 is equal to that surface of the inlet end of the spindle 102 which is under the influence of the liquid pressure acting in the inlet 2. The liquid pressure in the inlet 2 is thus balanced by the annular surface 109. Therefore, the spray head can be subjected to very high pressures in the inlet 2, including pressure shocks, without breaking the ampoule 101. A spray head as shown in figure 15 can be used to govern the activation of a plurality of other spray heads according to any of figures 1-14.

---

This Sheet Has Been Replaced



This Sheet Has Been Replaced



12

## Claims

1. Nozzle, in particular for a spray head, characterized by a helical spring (20, 35; 63) arranged before the orifice of the nozzle in such a way that liquid is made to flow in a helical path (23; 36; 70) between the loops of the spring, in order to set the liquid in a strong whirling motion before being discharged through the orifice.

2. Nozzle according to claim 1, characterized in that the helical spring (20; 35; 63) is positioned around a spindle element (17; 32, 37; 69) insertable into an at least essentially cylindrical passage in the housing (7; 61) of the nozzle, said helical spring being at its one end supported adjacent the nozzle orifice and tending to force the spindle away from the nozzle orifice towards a stop (14).

3. Nozzle according to claim 2, characterized in that the helical spring (20) at its other end bears against a flange (21) of the spindle element (17), said flange (21) having a diameter smaller than the diameter of said cylindrical passage (9) in the housing (7) of the nozzle, to enable an annular passage (22) between the flange (21) and the passage wall (9), for creating a liquid pressure fall over the annular passage against the action of the spring.

4. Nozzle according to claim 3, characterized in that said spindle has a tapered extension (26; 38) forming an annular passage (27; 39) with the surrounding housing.

5. Nozzle according to claim 4, characterized in that said tapered extension (26) is arranged to block the feed channel (5) at a predeterminable liquid pressure.

6. Nozzle according to claim 3, characterized in that the movement of said spindle (17) against the



\* C L M S \*

This Sheet Has Been Replaced



13

force of the spring (20) is restricted by the wall of a conical whirl chamber (12).

7. Nozzle according to claim 2, characterized in

5           that the helical spring (63) at its other end bears against a plunger-like portion (64) of a spindle arranged in a channel (3) in a spray head,

          that the element (69), around which the spring (63) is laid, is a portion of said spindle,

10           that the movement of the spindle in the channel (3) is in its one end position restricted by a stop at the inlet (2) of the spray head and in its other end position restricted by said element (69), around which the spring (63) is laid, stopping against the nozzle housing (61) adjacent the nozzle orifice, preferably

15           against the wall of a conical whirl chamber (62), and  
          that there is an annular passage (71) between said plunger-like portion (64) and the surrounding wall of the channel (3), said passage 71 being in  
20           connection to said helical path (70).

          8. Nozzle according to claim 7, characterized in that the spindle has an axial channel (65) which behind said plunger-like spindle portion (64), as seen in the direction from the spray head inlet (2), is in  
25           connection with said helical path (70) running between the loops of the helical spring (63) and preferably has a throttled inlet (66).

          9. Nozzle according to claim 6 or claim 7, characterized in that the spindle end surface (18;  
30           73) contacting the whirl chamber wall has a number of oblique grooves (19; 74) to provide a passage between the abutting surfaces of the whirl chamber wall and the spindle end surface (18).

          10. Nozzle according to claim 6 or claim 7,  
35           characterized in that the spindle end surface (18; 73) fits sealingly against the whirl chamber wall.



## Abstract

5 The object of the invention is to provide a new  
nozzle which in particular is suitable for use in such  
spray heads for fire fighting which operate with a  
high liquid pressure. Inside the orifice (13) of the  
nozzle is arranged a helical spring (20) in such a  
manner that the liquid is brought to flow along a  
helical path (23) between the loops of the spring,  
10 whereat the liquid is set into a strong whirling  
motion before leaving the orifice of the nozzle.

(Figure 3)

---


This Sheet Has Been Replaced




This Sheet Has Been Replaced




1/3

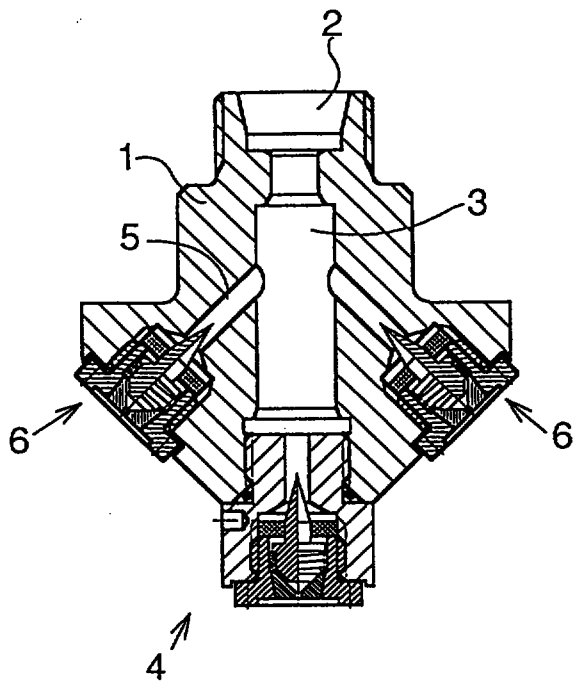


**Fig. 1**

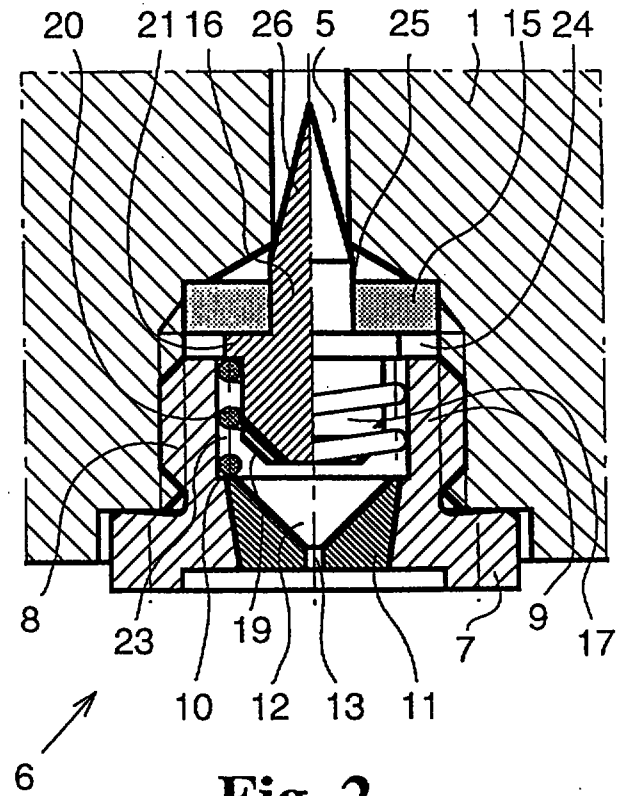

**Fig. 2**

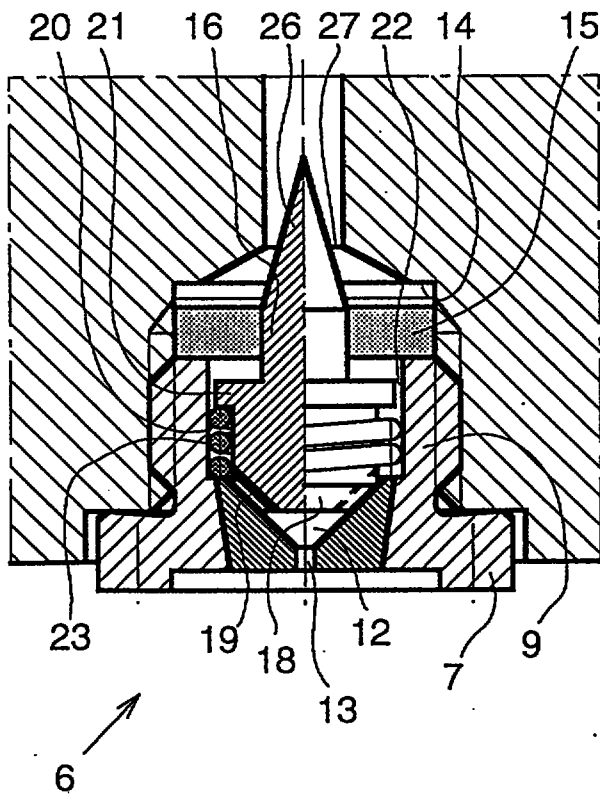

**Fig. 3**

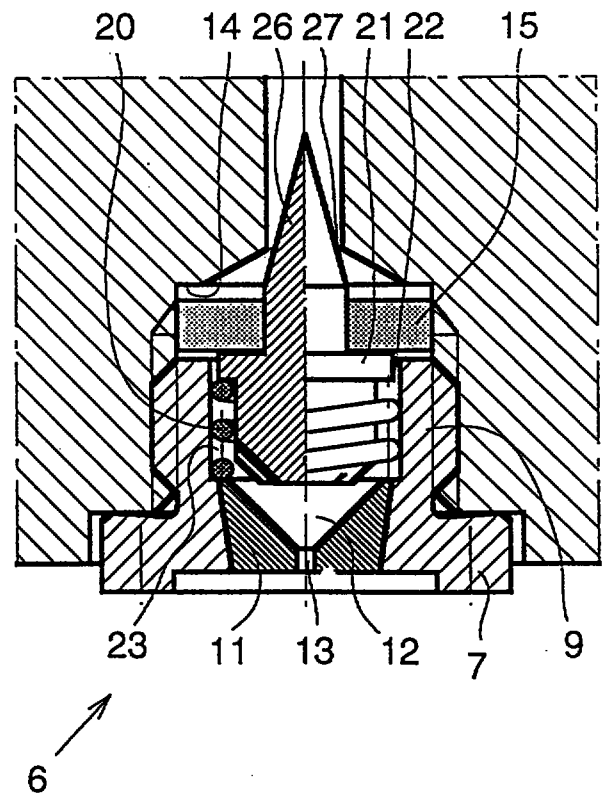

**Fig. 4**

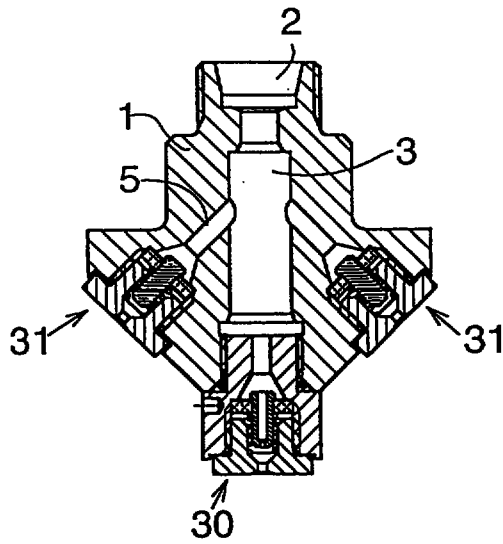


Fig. 5

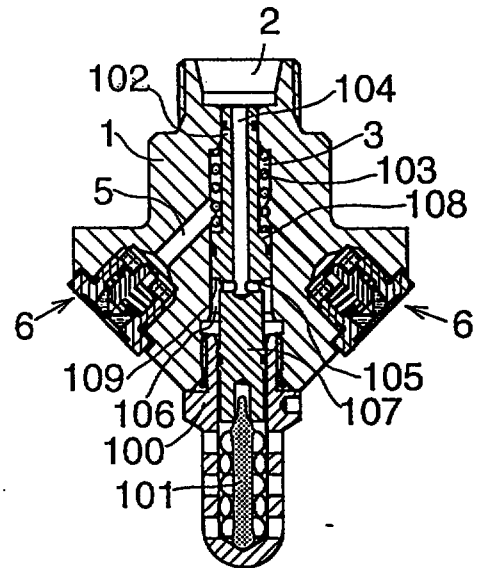


Fig. 15

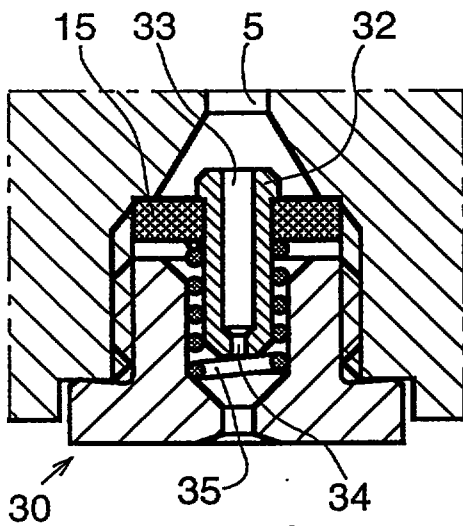


Fig. 6

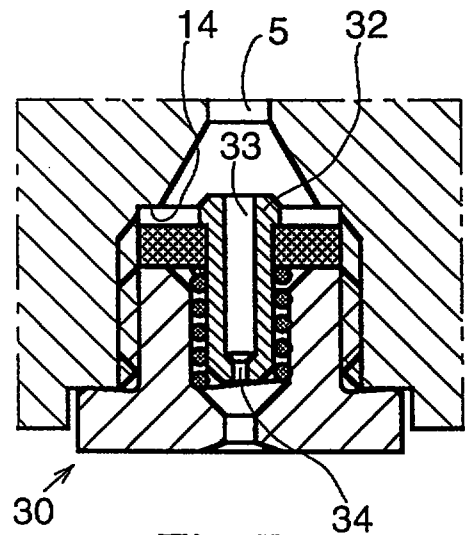


Fig. 7

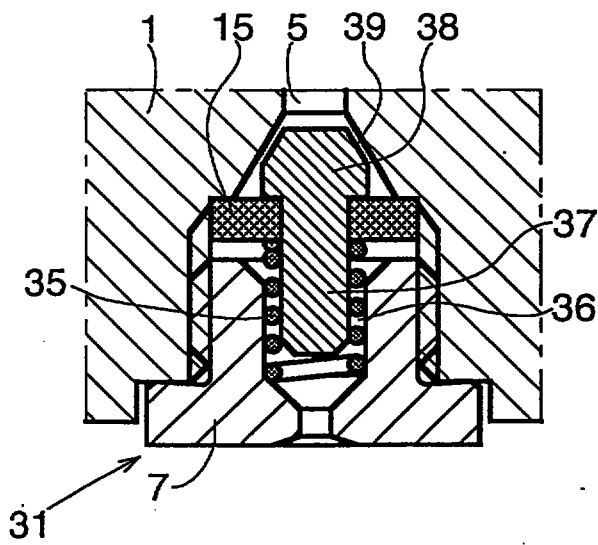


Fig. 8



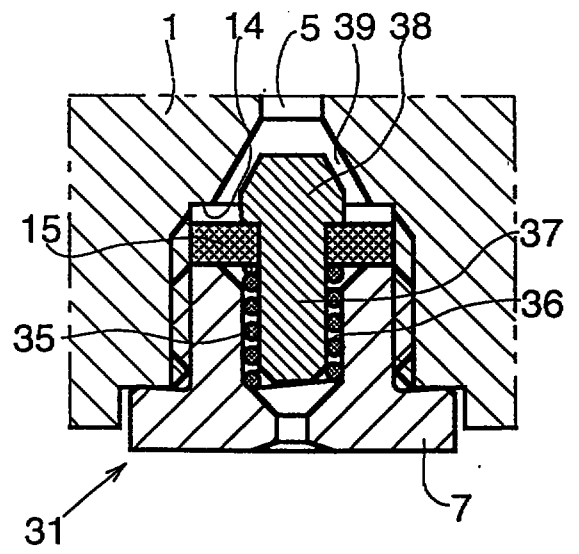


Fig. 9




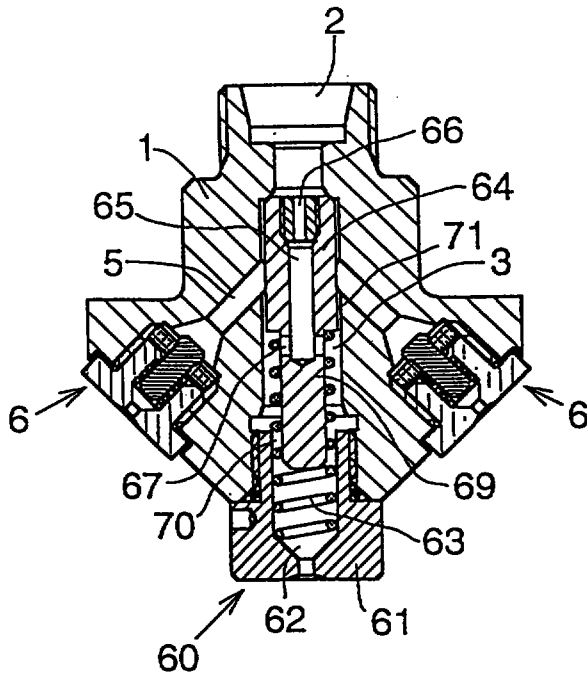


**Fig. 10**

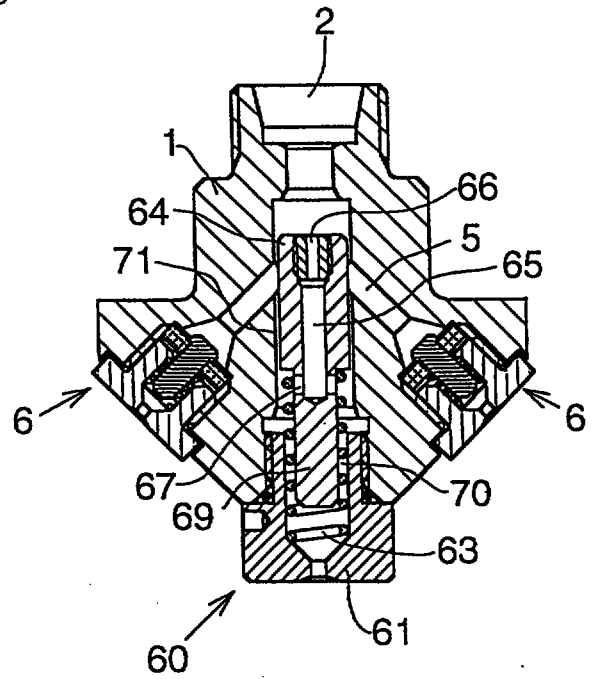

**Fig. 14**

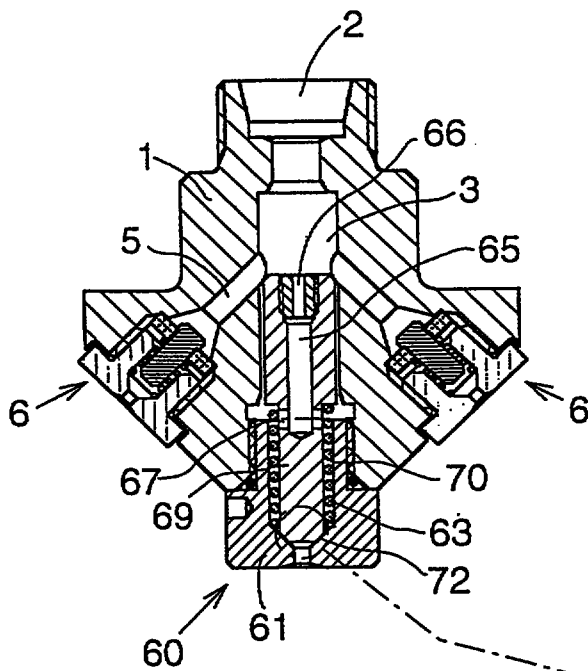

**Fig. 11**

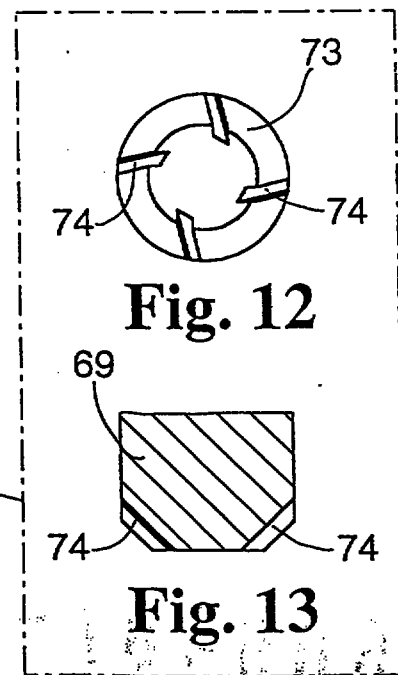

**Fig. 12**

**Fig. 13**

This Sheet Has Been Replaced



| REPLACEMENT SHEETS                  |                                               | SG      |
|-------------------------------------|-----------------------------------------------|---------|
| <input checked="" type="checkbox"/> | Description : paged ...1... to paged ...11... |         |
| <input checked="" type="checkbox"/> | Claim(s) : paged ...12... to paged ...13...   |         |
| <input checked="" type="checkbox"/> | Drawing(s) : paged ...1... to paged ...3...   |         |
| <input checked="" type="checkbox"/> | Abstract : paged ...14... to paged ...7...    |         |
| DATE OF RECEIPT                     |                                               | 29/1/97 |

1

Nozzle

| REPLACED SHEETS                     |                                               | SG |
|-------------------------------------|-----------------------------------------------|----|
| <input checked="" type="checkbox"/> | Description : paged ...1... to paged ...11... |    |
| <input checked="" type="checkbox"/> | Claim(s) : paged ...12... to paged ...13...   |    |
| <input checked="" type="checkbox"/> | Drawing(s) : paged ...1... to paged ...3...   |    |
| <input checked="" type="checkbox"/> | Abstract : paged ...14... to paged ...7...    |    |
| DATE OF RECEIPT                     |                                               |    |

The present invention relates to a nozzle.

The object of the invention is to provide a new nozzle which in particular is suitable for use in such spray heads which are capable of operating at a high driving liquid pressure.

The nozzle according to the invention is mainly characterized by a helical spring arranged before the orifice of the nozzle in such a way that liquid is made to flow in a helical path between the loops of the spring, in order to set the liquid in a strong whirling motion before being discharged through the orifice.

Preferably the helical spring is positioned around a spindle element insertable into an at least essentially cylindrical passage in the housing of the nozzle.

As the operating pressure decreases, the spring expands gradually, whereat the pin follows along and is removed from its bottom position near the orifice of the nozzle. This results in a decreasing flow resistance before the nozzle orifice, partly because the distance increases between adjacent loops of the helical spring and the cross section of the helical flow path thus increases, and partly because the axial length of the helical path becomes shorter.

Thus the amount of discharged liquid per time unit will remain essentially constant in spite of variations in the operating pressure. In many cases it is of advantage to employ one or several hydraulic accumulators as drive unit for the liquid, whereat an essentially constant rate of liquid spray can be obtained in spite of a decreasing operating pressure as the hydraulic accumulators gradually are discharged.

This Sheet Has Been Replaced



This is the replacement sheet

Date: 29 JAN 1997

In the following the invention shall be described in more detail with reference to the attached drawing which, by way of example, show a number of preferred emodiments.

Figure 1 shows an axial section of a spray head with a first embodiment of nozzles according to the present invention.

Figures 2, 3 and 4 show in an enlarged scale an axial section of an individual nozzle of figure 1, under the influence of different liquid pressures.

Figure 5 shows an axial section of a spray head with a second embodiment of nozzles according to the present invention.

Figures 6 and 7 show in an enlarged scale an axial section of the central nozzle of figure 5, under the influence of two different liquid pressures.

Figures 8 and 9 show in an enlarged scale an axial section of the side nozzles of figure 5, under the influence of two different liquid pressures.

Figures 10-14 show an alternative nozzle embodiment applied on a nozzle centrally arranged in the spray head, under the influence of different liquid pressures.

Figure 15 shows nozzles according to figures 1-4 mounted in a spray head provided with a release ampoule.

In the drawing the reference numeral 1 indicates a housing of a spray head with an inlet 2 for liquid, preferably of a high pressure, even up to about 300 bar. The inlet 2 continues as an axial channel 3 which in figure 1 leads to a centrally arranged nozzle 4 and from which lead branch channels 5 to side nozzles 6 directed obliquely outwards. The central nozzle 4 and the side nozzles 6 in figure 1 are a first preferred embodiment of the invention and shall in the following be described in more detail with reference to figures



2, 3 and 4 which show a side nozzle 6.

The nozzle 6 has a body or holder 7 which by means of a thread 8 is screwed in a seat joining a branch channel 5 in the housing 1 of the spray head. Through the holder 7 runs a connection which, seen in the direction from the channel 5, has a cylindrical portion the wall of which is indicated by 9 and which ends at an annular stop 10, and a conically narrowing portion with a whirl chamber element 11 which defines a conically narrowing whirl chamber 12 and an orifice 13.

Between the inner end of the holder 7 and a stop 14 formed in the nozzle seat is arranged a filter, preferably a disc-like sintered metal filter 15 having a central opening through which is entered an end pin 16 of a spindle having a cylindrical portion 17 reaching into the cylindrical passage of the holder 7 and terminating in an end surface 18 matching the conical surface of the whirl chamber 12 and provided with e.g. two to four oblique grooves 19.

Around cylindrical portion 17 of the spindle is laid a helical spring 20 with one end bearing against the stop 10 and/or the inner end of the whirl chamber element 11 or the wall of the whirl chamber 12 and the other end bearing against a flange 21 of the spindle said flange 21 in turn bearing against the filter 15. The spring 20 thus tends to press the spindle away from the whirl chamber 12 and to press the filter 15 against the stop 14. The diameter of the flange 21 is a little smaller than the diameter of the cylindrical passage, at 9, of the holder 7, so that there is an annular passage 22 between the flange 21 and the wall 9, when the spindle is driven against the (bottom) wall of the whirl chamber 12, as shown in figure 3.

Along the annular space between the cylindrical spindle portion 17 and the wall 9 of the cylindrical

This Sheet Has Been Replaced



This is the replacement sheet

Date: 29 JAN 1997

passage is formed a helical path 23 along and between the loops of the spring 20; the spindle portion 17 and the spring 20 are preferably of such dimensions that practically all of the passing liquid follows the helical path 23, and thereby the liquid is given a strong whirling motion in the whirl chamber 12 and further out through the orifice 13.

In figure 2 the spray head is either inactive or the active liquid pressure is so low that the spring 20 forces the filter 15 into abutment against the stop 14. The spring 20 is relatively expanded and the cross section of the helical path 23 is relatively wide. There is a gap 24 between the filter 15 and the end of the holder 7. A preferably conical extension 26 of the pin element 16 reaches into the inlet channel 5 and closes the orifice of the channel 5. That surface of the flange 21, against which the spring 20 bears, is essentially level with the inner end of the holder 7.

In figure 3 the spray head is activated and the liquid pressure is high. The pressure fall especially over the annular gap 27 between the cone 26 and the surrounding edge of the orifice of the inlet channel 5 and over the annular passage 22 between the flange 21 and the holder wall 9, and to some extent also over the filter 15 and the helical path 23, is so great that the spring 20 is compressed until the filter 15 hits the holder 7, and thereafter the spindle continues the movement on its own, because of the pressure fall over the annular passages 27 and 22. The end surface 18 of the spindle reaches down into contact with the whirl chamber bottom wall and thus the helical path 23 is much narrower than in figure 2. A violently whirling fog-like liquid spray is discharged through the orifice 13.

For spray heads contemplated in the present patent application it is often convenient to utilize



one or a plurality of hydraulic accumulators as a drive unit and a source of liquid.

The driving gas pressure, and thus the liquid pressure, will gradually fall to a value so low that the spring 20 forces the spindle loose from the whirl chamber element 11. The pressure falls especially over the annular passage 22 and over the annular gap 27 now balance the spring 20. As the drive pressure continues to fall, the spring 20 expands further until the conical extension eventually blocks the inlet channel 5, whereat the filter 15 is close at or against the stop 14.

In the state of figure 4, a desired centered positioning of the spindle is, in spite of the lateral, or radial clearance between the filter 15 and the stop 14 and the clearance 25 between the pin element 16 and the filter 15, ensured by means of the conical extension 26 of the pin element 16. A centered position is desirable in order to obtain an even width for the annular passages 22 and 27 all around and thus to obtain an essentially predeterminable flow resistance through these passages. The liquid flow past the cone 26 automatically centers the spindle structure. It should be noted, however, that a satisfactory result can be achieved in many cases also without an extension 26, i.e. with the pin element ending at or slightly above the filter 15, e.g. as the pin element 32 in figures 5-7.

By varying the axial length of the cylindrical pin element 16 and/or the tapering angle of the extension 26 it is possible to close the inlet 5 at a predeterminable liquid pressure as the spring 20 with decreasing drive pressure gradually expands from the state of figure 3 through the state of figure 4 back to the state of figure 2. In the embodiment of figures 1-4 the extension 26 closes the inlet 5 just before or

---

This Sheet Has Been Replaced



This is the replacement sheet

Date: 29 JAN 1997

just as the filter 15 contacts the stop 14. The extension 26 may of course alternatively have the general form of a truncated cone. If the grooves 19 are omitted, the nozzle will be closed in the position of figure 3 and will open at a predeterminable decreased pressure. The filter 15 plays only a minor, deletable part in creating those pressure falls which govern the function of the nozzle, but a filter is recommendable for cleaning the liquid.

In the state of figure 4 the cross section of the helical path 23 is wider than in figure 3. The result of this is that the rate of liquid out of the orifice does not decrease in proportion to the decreasing liquid pressure but remains at a surprisingly constant rate, although the whirling motion of the liquid fog successively decreases and the droplet size increases.

The force of the spring 20, as well as the annular passages 22 and 27, can be varied according to varying considerations with respect to liquid rate, droplet sizes, desired drive pressures etc., at different stages of a fire extinguishing procedure. Different spray heads in an installation for fighting fire may be individually adapted, likewise individual nozzles in one spray head.

In the latter case it is primarily the central nozzle of a spray head, as in figure 1, that can be adapted to differ from the side nozzles, e.g. in such a way that the spring is somewhat stronger than the springs of the side nozzles, whereby it at a decreased liquid pressure is possible to for a longer time maintain a relatively forceful liquid spray or jet in the main direction. This can be utilized e.g. in a portable pistol-like fire extinguisher device as shown in the Finnish patent application No. 924119 in such a way that simultaneously with a forceful liquid jet in



the main direction, through a central nozzle, a shield of liquid fog is provided by means of the side nozzles, whereby it is possible to approach close to a violent fire developing intensive heat. Such a manually manuevrable device can without difficulties be constructed in such a way that the operating or liquid pressure can be varied as desired during the extinguishing procedure.

By means of nozzles according to the invention a particularly favourable effect is achieved when hydraulic accumulators according to the Finnish patent application No. 924752 are used as a drive unit. Such hydraulic accumulators have an outlet tube with wall apertures, so that drive gas is mixed into the extinguishing liquid after the gas pressure has decreased to a predeterminable level. In the initial stage according to figure 3 a violently whirling liquid fog with small droplets and a good penetration power is achieved, in the beginning of the stage according to figure 4 larger droplets with a good capability of cooling hot surfaces and smouldering fires is achieved, and thereafter, with gradually decreasing drive pressure and increasing amounts of intermixed gas, and gradual return to the state of figure 2, a total flooding with even smaller droplets than during the initial stage of figure 3 can be maintained for a long time.

In fire fighting installations employing a liquid pump as a drive unit, the nozzles according to the invention makes it possible to vary the mode of liquid spray during the extinguishing procedure, by varying the operating pressure of the liquid pump, or by arranging valves for throttling the liquid flow and thereby adjusting the pressure. The action range for each spray head can therefore be expanded and one can manage with fewer spray heads.

---

This Sheet Has Been Replaced



This is the replacement sheet

Date: 29 JAN 1997

The embodiment shown in figures 5-9, with a central nozzle 30 and side nozzles 31, has in the central nozzle a spindle pin 32 with an axial channel 33 ending in a throttle 34. A helical spring 35 is laid around the pin 32 to form a helical flow path 36 along and between the loops of the spring 35. This embodiment produces in general a rather forceful spray that creates a suction which brings along liquid fog produced by the side nozzles 31, which can have a solid spindle pin 37 with a helical spring 35 around it to form a helical flow path 36. The pin 37 preferably has an expanded head portion 38 in order to form an annular passage 39 between the head 38 and the surrounding wall of the housing 1, for the same purpose as the extension 26 shown in figures 1-4. The head 38 may be formed to block the inlet 5 in the position of figure 8.

Figures 6 and 7, and 8 and 9, show, like figures 2 and 3, the situation at no or low liquid preassure and at a high liquid pressure, respectively. Naturally the situation of figure 4 occurs as well.

A further embodiment of the invention is shown in figures 10-14. The side nozzles 6 of the spray head are of the same kind as in figures 1-4 and the central nozzle 60 has a holder 61 screwed into the lower end of the central channel 3 of the spray head and with a whirl chamber 62 at the nozzle orifice. A helical spring 63 is at its one end supported against the wall of the whirl chamber 62 and at its other end against a thickened plunger-like portion of a spindle 64 movable in the central channel 3, said plunger-like portion forming approximately that half of the spindle which is towards the inlet of the channel 3. Between the plunger portion of the spindle 64 and the wall of the channel 3 there is an annular passage 71. Through the spindle 64 runs an axial channel 65 with a throttle 46



at its inlet and with branchings 67 to the channel 3 after the plunger portion of the spindle. The thinner portion 69 of the spindle 64, around which portion 69 the spring 63 is laid, can for the rest be massive. The loops of the spring 63 form a helical path 70 between the the spindle portion 69 and the cylindrical portion of the holder 61 screwed into the end of the channel 3.

In inactive state, as shown in figure 10, the spring 63 forces the spindle 64 to abutment against the inlet of the central channel 3. A high pressure liquid flowing through causes such a pressure drop over the throttle 66 and over the annular passage 71 between the plunger portion of the spindle 64 and the wall of the channel 3 that the spindle is driven to the bottom towards the central nozzle 60, as shown in figure 11, with the massive spindle portion 69 in abutment with its preferably conical end against the likewise conical wall of the whirl chamber 62. The spring 63 is compressed and the helical path 70 formed by the loops of the spring is narrow and continues after the end of the spring 63 in a passage 72 formed between the spindle end and the wall of the whirl chamber and leading to the nozzle orifice.

A preferable embodiment of the passage 72, which is not clearly visible in figure 11, is shown in figures 12 and 13. The conical end surface of the spindle portion 69 is indicated by 73 and a number of preferably oblique grooves, e.g. two to four grooves, in the conical surface 73 are indicated by 74. In the position of figure 12 the central nozzle 60 thus produces a violently whirling liquid fog, just as the side nozzles 6. The grooves 19 in the embodiment of figures 1-4 are preferably arranged in the same way. If the grooves 74 are omitted, that particular nozzle will be closed in the position of figure 11.



After the liquid pressure has decreased sufficiently, the spindle 64 takes a position approximately as in figure 14. In this position the the pressure drop over the annular passage 71, the throttle 66 and the helical path 70 balances the force of the spring 63. The helical path 70 is now wider as in figure 12, and the feed channels 5 to the side nozzles 6 are essentially blocked by the plunger portion of the spindle 64. Most of the liquid is now discharged through the central nozzle 60 as a forceful concentrated spray.

An effective pressure fall in the state of figure 14 can alternatively be brought about by means of the annular passage 71 alone, i.e. with the throttle 66 blocked. The annular passage 71 would then be wider and would permit a correspondingly freer connection to the side nozzles in figure 14.

In general the embodiment of figures 10-14 provides for a wide variation range with respect to droplet sizes through the central nozzle 60, because the movement of the spring 63 is proportionally long with a correspondingly wide variation of the cross section of the helical path 70. Consequently, the action range of the central liquid jet is long in the figure 14 position.

Figure 15 shows a spray head with a number of side nozzles of the same kind as in figures 1-4. In the position of the earlier described central nozzles there is arranged a holder 100 for a release ampoule 101 which melts or breaks at a certain risen temperature. A spindle 102 positioned in the central channel 3 of the spray head is arranged to be forced by a helical spring 103 against the ampoule 101 with a force which alone is not capable of breaking the ampoule but which after the ampoule has melt or broken drives the spindle 102 downwards from the position of



figure 15 and thereby opens liquid connections from the spray head inlet to the side nozzles 6.

The spindle 102 has an axial channel 104 starting from the end at the inlet 2 and via branchings 85 ending into an annular chamber 106 between the wall of the channel 3 and the opposite end part 107 of the spindle 102, said end part 107 being inserted into the ampoule holder 100 in sealed relation thereto. Towards the inlet end of the spindle 102, the annular chamber 106 ends in a plunger portion 88 sealed in relation to the wall of the channel 3. The annular surface 109 formed by the plunger 108 is equal to that surface of the inlet end of the spindle 102 which is under the influence of the liquid pressure acting in the inlet 2. The liquid pressure in the inlet 2 is thus balanced by the annular surface 109. Therefore, the spray head can be subjected to very high pressures in the inlet 2, including pressure shocks, without breaking the ampoule 101. A spray head as shown in figure 15 can be used to govern the activation of a plurality of other spray heads according to any of figures 1-14.

---

This Sheet Has Been Replaced



This is the replacement sheet

Date: 29 JAN 1997



## Claims

1. Nozzle, in particular for a spray head, characterized by a helical spring (20, 35; 63) arranged before the orifice of the nozzle in such a way that liquid is made to flow in a helical path (23; 36; 70) between the loops of the spring, in order to set the liquid in a strong whirling motion before being discharged through the orifice.

2. Nozzle according to claim 1, characterized in that the helical spring (20; 35; 63) is positioned around a spindle element (17; 32, 37; 69) insertable into an at least essentially cylindrical passage in the housing (7; 61) of the nozzle, said helical spring being at its one end supported adjacent the nozzle orifice and tending to force the spindle away from the nozzle orifice towards a stop (14).


3. Nozzle according to claim 2, characterized in that the helical spring (20) at its other end bears against a flange (21) of the spindle element (17), said flange (21) having a diameter smaller than the diameter of said cylindrical passage (9) in the housing (7) of the nozzle, to enable an annular passage (22) between the flange (21) and the passage wall (9), for creating a liquid pressure fall over the annular passage against the action of the spring.

4. Nozzle according to claim 3, characterized in that said spindle has a tapered extension (26; 38) forming an annular passage (27; 39) with the surrounding housing.

5. Nozzle according to claim 4, characterized in that said tapered extension (26) is arranged to block the feed channel (5) at a predeterminable liquid pressure.

6. Nozzle according to claim 3, characterized in that the movement of said spindle (17) against the





force of the spring (20) is restricted by the wall of a conical whirl chamber (12).

7. Nozzle according to claim 2, characterized in

that the helical spring (63) at its other end bears against a plunger-like portion (64) of a spindle arranged in a channel (3) in a spray head,

that the element (69), around which the spring (63) is laid, is a portion of said spindle,

that the movement of the spindle in the channel (3) is in its one end position restricted by a stop at the inlet (2) of the spray head and in its other end position restricted by said element (69), around which the spring (63) is laid, stopping against the nozzle housing (61) adjacent the nozzle orifice, preferably against the wall of a conical whirl chamber (62), and

that there is an annular passage (71) between said plunger-like portion (64) and the surrounding wall of the channel (3), said passage 71 being in connection to said helical path (70).

8. Nozzle according to claim 7, characterized in that the spindle has an axial channel (65) which behind said plunger-like spindle portion (64), as seen in the direction from the spray head inlet (2), is in connection with said helical path (70) running between the loops of the helical spring (63) and preferably has a throttled inlet (66).

9. Nozzle according to claim 6 or claim 7, characterized in that the spindle end surface (18; 73) contacting the whirl chamber wall has a number of oblique grooves (19; 74) to provide a passage between the abutting surfaces of the whirl chamber wall and the spindle end surface (18).

10. Nozzle according to claim 6 or claim 7, characterized in that the spindle end surface (18; 73) fits sealingly against the whirl chamber wall.



**NOZZLE**

**Abstract**

The object of the invention is to provide a new nozzle which in particular is suitable for use in such spray heads for fire fighting which operate with a high liquid pressure. Inside the orifice (13) of the nozzle is arranged a helical spring (20) in such a manner that the liquid is brought to flow along a helical path (23) between the loops of the spring, whereat the liquid is set into a strong whirling motion before leaving the orifice of the nozzle.

(Figure 3)


---

This Sheet Has Been Replaced




This is the replacement sheet .


Date: 29 JAN 1997

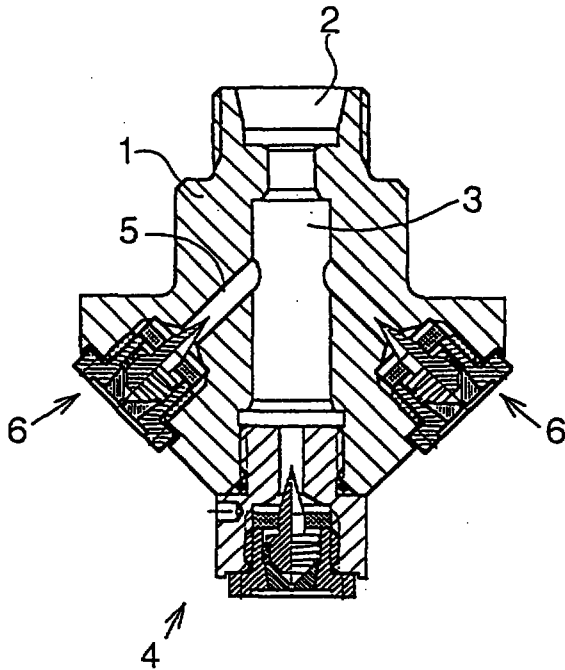


**Fig. 1**

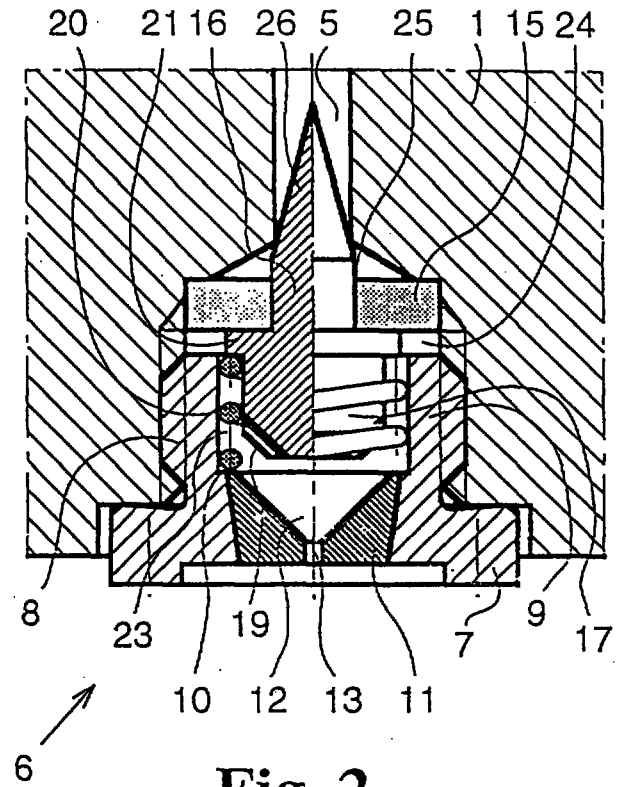

**Fig. 2**

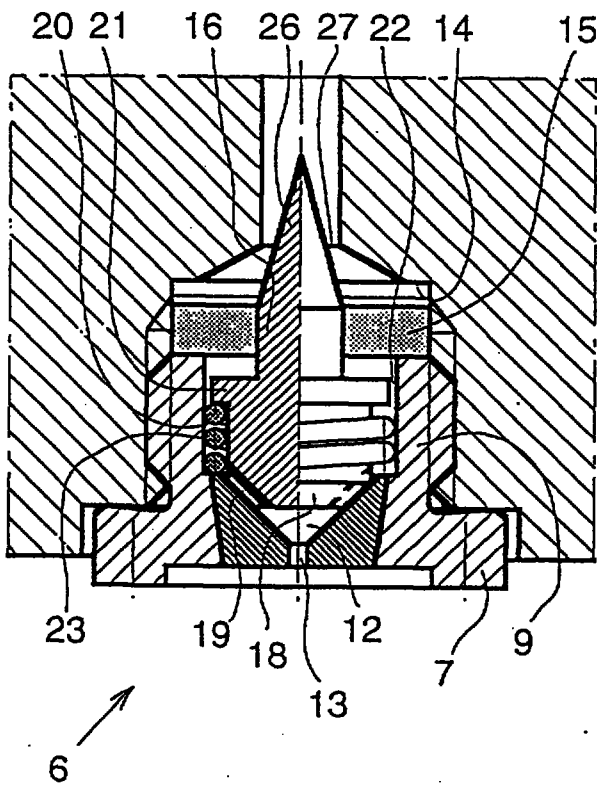

**Fig. 3**

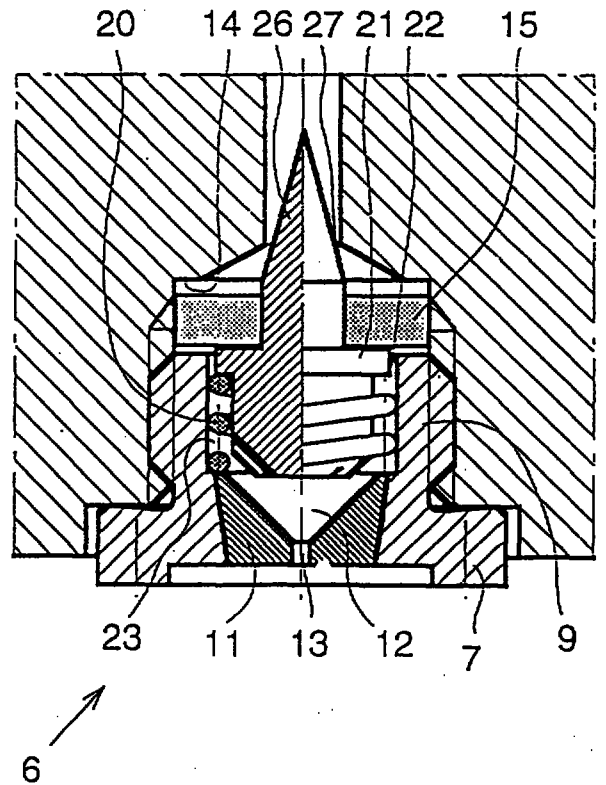

**Fig. 4**

This Sheet Has Been Replaced



This is the replacement sheet

29 JAN 1997

Date:

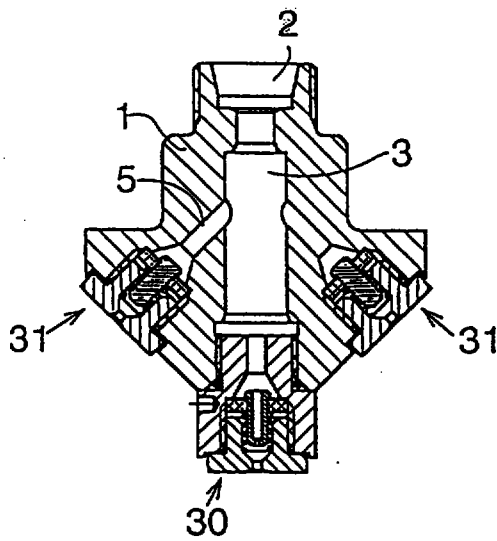


Fig. 5

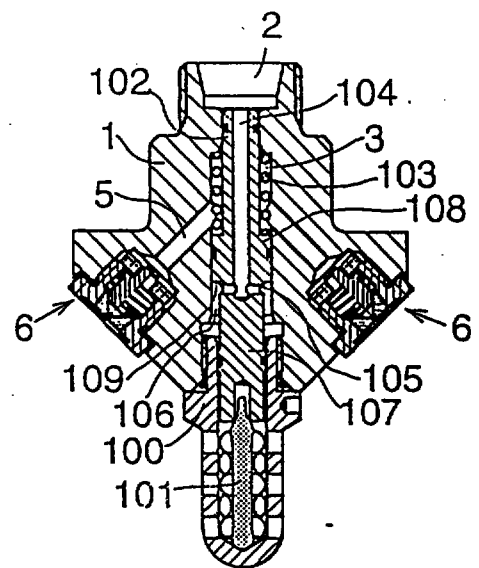


Fig. 15

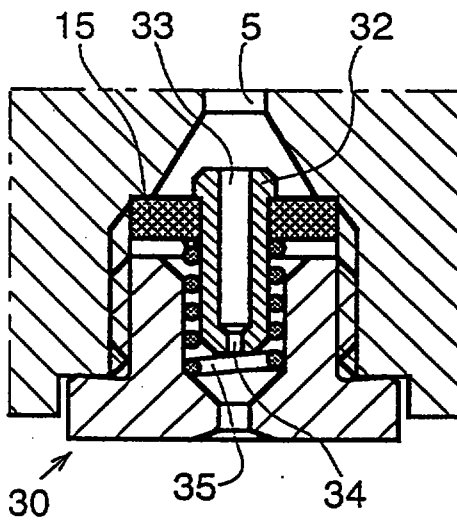


Fig. 6

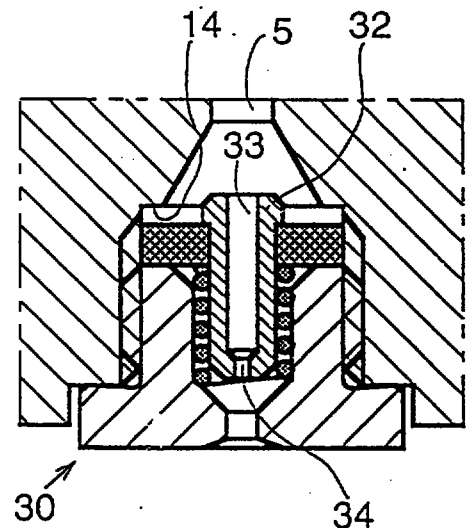


Fig. 7

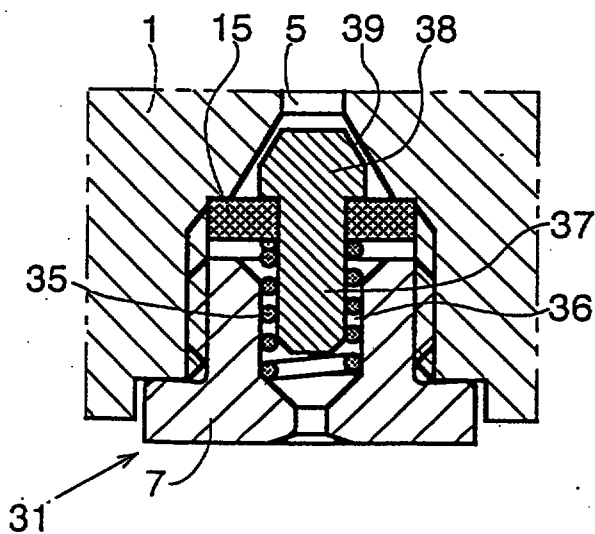


Fig. 8


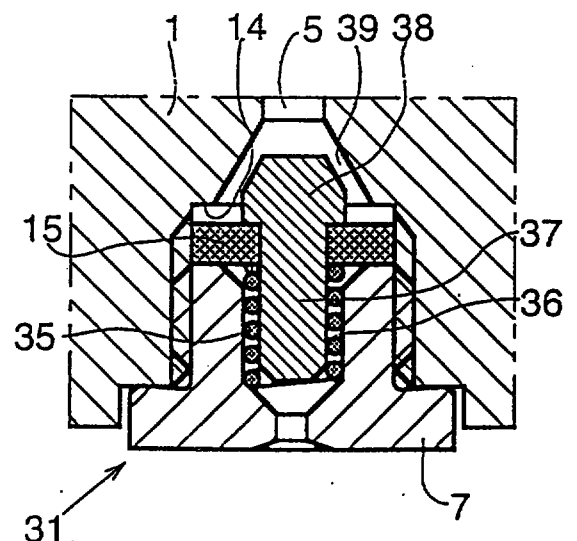



Fig. 9

This is the replacement sheet


Date: 29 JAN 1997

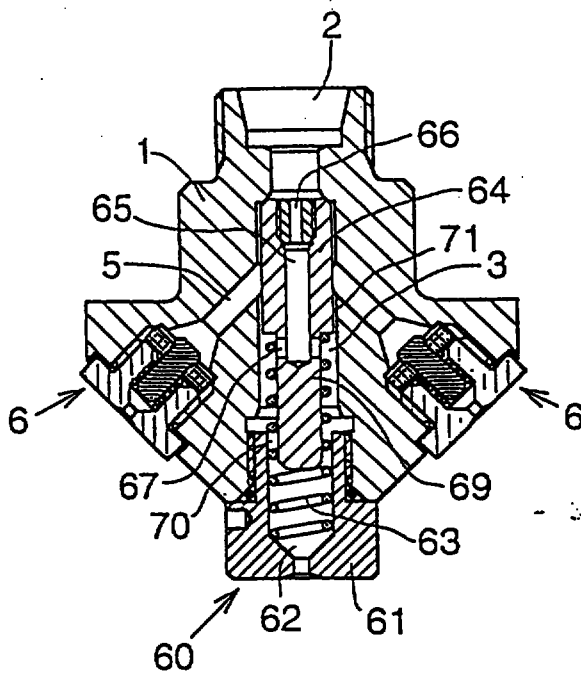


**Fig. 10**

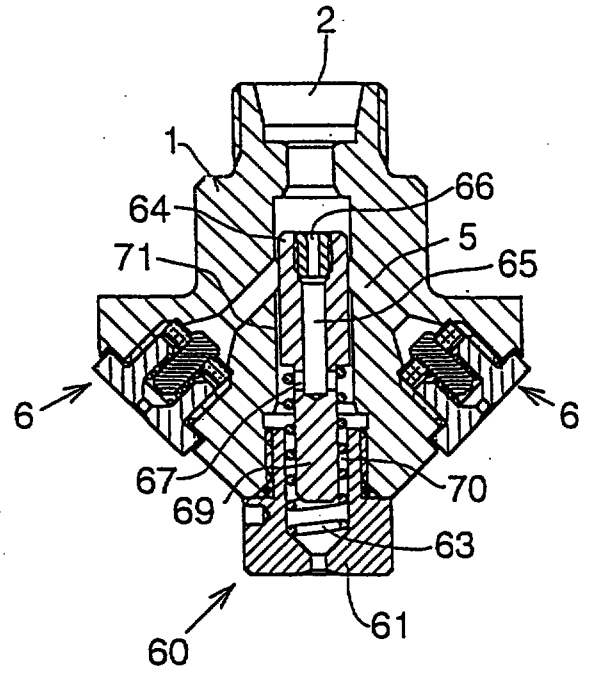

**Fig. 14**

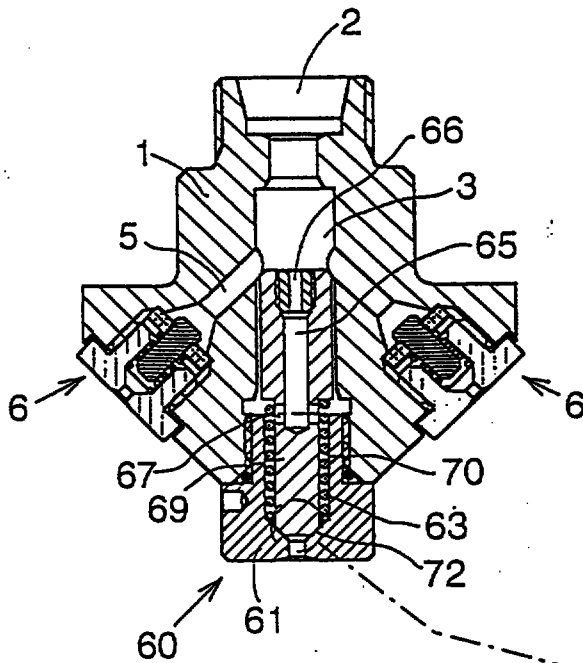

**Fig. 11**

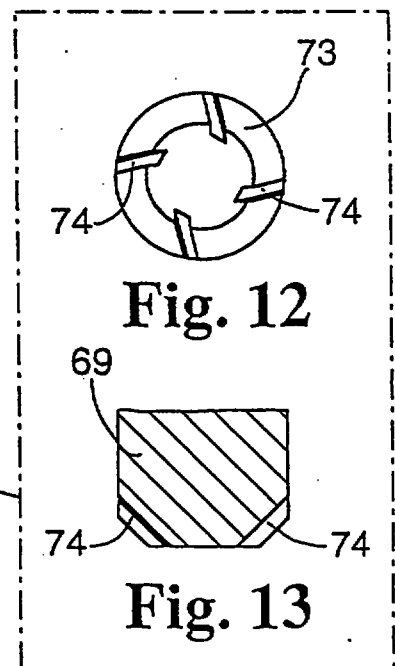

**Fig. 12**

**Fig. 13**

This is the replacement sheet

Date: 29 JAN 1997

| REPLACEMENT SHEETS                  |                                          | SG      |
|-------------------------------------|------------------------------------------|---------|
| <input checked="" type="checkbox"/> | Description : paged ..... to paged ..... | 9       |
| <input checked="" type="checkbox"/> | Claim(s) : paged ..... to paged .....    | 11      |
| <input checked="" type="checkbox"/> | Drawing(s) : paged ..... to paged .....  | 3       |
| <input checked="" type="checkbox"/> | Abstract : paged ..... to paged .....    | 7       |
| DATE OF RECEIPT .....               |                                          | 19/8/98 |

- 1 -

# NOZZLE WITH HELICAL SPRING WHICH SETS LIQUID IN WHIRLING MOTION

## Description

The present invention relates to a nozzle in particular for a spray head.

DE-A-2524856 discloses a nozzle in which a helical spring is arranged upstream of the orifice of the nozzle in such a manner that liquid is made to flow in the helical path between the loops of the spring and thereby set the liquid in a whirling motion.

The aim of the invention is to provide a new nozzle which is especially suitable for use in such spray heads which are capable of operating at a high driving liquid pressure.

Accordingly, the present invention provides a nozzle, in particular for a spray head, with a housing, a spindle element insertable into an essentially cylindrical passage in the housing, and a helical spring arranged upstream of the orifice of the nozzle in such a manner that in use liquid is made to flow in the helical path between the loops of the helical spring so as to set the liquid in a strong whirling motion before being discharged through the orifice, the helical spring being disposed around the spindle element and at its one end being supported adjacent the orifice; characterized in that the helical spring is adapted to exert a force on the spindle element tending to bias the spindle element away from the orifice towards a stop, the spindle element being axially movable in the direction of the essentially cylindrical passage in accordance with forces acting thereon, the forces comprising the force of the helical spring and the pressure of the liquid.

As the operating pressure decreases, the helical spring expands gradually, whereat the spindle element follows along and is removed from its bottom position near the orifice of the nozzle. This results in a decreasing flow resistance before the orifice, partly because the distance increases between adjacent loops of the helical spring and the cross section of the helical flow path thus increases, and partly because the axial length of the helical flow path becomes shorter.

Thus, the amount of discharged liquid per unit time will remain essentially constant in spite of variations in the operating pressure. In many cases it is of advantage

This is the replacement sheet

Date: 19 AUG 1998

to employ one or several hydraulic accumulators as a drive unit for the liquid, whereat an essentially constant rate of liquid spray can be obtained in spite of a decreasing operating pressure as the hydraulic accumulators are gradually discharged.

Preferred embodiments of the present invention will now be described hereinbelow by way of example only with reference to the accompanying drawings, in which:

Figure 1 shows an axial section of a spray head having nozzles in accordance with a first embodiment of the present invention;

Figures 2, 3 and 4 show in enlarged scale an axial section of an individual nozzle of the spray head of Figure 1, under the influence of different liquid pressures;

Figure 5 shows an axial section of a spray head having nozzles in accordance with a second embodiment of the present invention;

Figures 6 and 7 show in enlarged scale an axial section of the central nozzle of the spray head of Figure 5, under the influence of two different liquid pressures;

Figures 8 and 9 show in enlarged scale an axial section of the side nozzles of the spray head of Figure 5, under the influence of two different liquid pressures;

Figures 10, 11 and 14 show axial sections of a spray head having a central nozzle in accordance with a further embodiment of the present invention, under the influence of different liquid pressures;

Figures 12 and 13 show views of the conical end surface of the spindle of the spray head of Figures 10, 11 and 14; and

Figure 15 shows an axial section of a spray head provided with a release ampoule incorporating the nozzles of the spray head of Figures 1 to 4.

In the drawings reference sign 1 indicates a housing of a spray head having an inlet 2 for a liquid, preferably of a high pressure, even up to about 300 bar. The inlet 2 continues as an axial channel 3 which in Figure 1 leads to a centrally disposed nozzle 4 and from which lead branch channels 5 to side nozzles 6 directed obliquely outwards. The central nozzle 4 and the side nozzles 6 in Figure 1 are in accordance with a first pre-

ferred embodiment of the present invention and shall be described in more detail hereinbelow with reference to Figures 2, 3 and 4 which show a side nozzle 6.

Each side nozzle 6 has a body or holder 7 which by means of a thread 8 is screwed in a seat which is in communication with a branch channel 5 of the spray head. Through the holder 7 runs a connection which, when viewed in the direction from the branch channel 5, has a cylindrical portion, the wall of which is indicated by reference sign 9 and which ends at an annular stop 10, and a conically tapering portion. A whirl chamber element 11 is disposed in the conically tapering portion. The whirl chamber element 11 includes a conically tapering whirl chamber 12 and an orifice 13.

Between the inner end of the holder 7 and a stop 14 formed in the nozzle seat is arranged a filter 15, preferably a disc-like sintered metal filter, having a central opening through which passes an end pin 16 of a spindle. The spindle has a cylindrical portion 17 which extends into the cylindrical portion of the holder 7 and terminates in an end surface 18 which matches the conical surface of the whirl chamber 12 and which is provided with, for example, two to four oblique grooves 19.

Around the cylindrical portion 17 of the spindle is disposed a helical spring 20, with one end bearing against the stop 10 and/or the inner end of the whirl chamber element 11 or the conical surface of the whirl chamber 12 and the other end bearing against a flange 21 of the spindle, said flange 21 in turn bearing against the filter 15. The spring 20 thus tends to bias the spindle away from the whirl chamber 12 and press the filter 15 against the stop 14. The diameter of the flange 21 is a little smaller than the diameter of the cylindrical portion of the holder 7, such that there is an annular passage 22 between the circumference of the flange 21 and the wall 9 of the cylindrical portion of the holder 7 when the spindle is driven against the conical surface of the whirl chamber 12 (as shown in Figure 3).

In the annular space between the cylindrical portion 17 of the spindle and the wall 9 of the cylindrical portion of the holder 7 is formed a helical path 23 along and between the loops of the spring 20. The cylindrical portion 17 of the spindle and the spring 20 are preferably so dimensioned that practically all of the passing liquid follows the helical path 23, and thereby the liquid is put in a strong whirling motion in the whirl chamber 12 and fur-

This is the replacement sheet

Date: 18 AUG 1998

ther out through the orifice 13.

In Figure 2 the spray head is either inactive or the active liquid pressure is so low that the force of the spring 20 is sufficient to force the filter 15 into abutment against the stop 14. The spring 20 is in an expanded configuration and the cross section of the helical path 23 is relatively large. In this state there is a gap 24 between the filter 15 and the end of the holder 7, and preferably a conical extension 26 of the pin element 16 extends into and closes the branch channel 5 of the spray head. Further, that surface of the flange 21 against which the spring 20 bears is essentially co-planar with the inner end of the holder 7.

In Figure 3 the spray head is activated and the liquid pressure is high. The pressure drop especially over an annular passage 27 between the conical extension 26 of the pin element 16 and the surrounding edge of the branch channel 5 of the spray head and over the annular passage 22 between the flange 21 of the spindle and the wall 9 of the cylindrical portion of the holder 7, and to some extent also over the filter 15 and the helical path 23, is so great that the spring 20 is compressed until the filter 15 abuts the holder 7, and the end surface 18 of the spindle, with continued movement because of the pressure drop over the annular passages 22 and 27, contacts the conical surface of the whirl chamber 12. Thus, the helical path 23 has a much smaller cross section than in Figure 2. In use, a violently whirling fog-like liquid spray is discharged through the orifice 13.

For spray heads contemplated by the present invention it is often convenient to utilize one or a plurality of hydraulic accumulators as a drive unit and a source of liquid.

In using such hydraulic accumulators the driving gas pressure, and thus the liquid pressure, will gradually fall to a value so low that the spring 20 forces the spindle loose from the whirl chamber element 11. The pressure drops especially over the annular passages 22 and 27 now balance the force of the spring 20. As the drive pressure continues to fall, the spring 20 expands further until the conical extension 26 eventually blocks the branch channel 5 of the spray head, whereat the filter 15 is close to or against the stop 14.

In the state of Figure 4, a desired centered positioning of the spindle is, in spite of the lateral or radial clearance between the filter 15 and the stop 14 and the

This is the replacement sheet

Date: 19 AUG 1998

clearance 25 between the pin element 16 and the filter 15, ensured by means of the conical extension 26 of the pin element 16. A centered position is desirable in order to obtain an even circumferential width for the annular passages 22 and 27 and thus obtain an essentially predeterminable flow resistance through those passages. The liquid flow past the conical extension 26 automatically centers the spindle structure. It should be noted, however, that a satisfactory result could be achieved in many cases without the conical extension 26, that is with the pin element 16 ending at or slightly beyond the filter 15, for example, in the manner of pin element 32 of the nozzle of Figures 6 and 7.

By varying the axial length of the pin element 16 and/or the tapering angle of the conical extension 26 it is possible to close the branch channel 5 at a predeterminable liquid pressure as the spring 20 with decreasing drive pressure gradually expands from the state of Figure 3 through the state of Figure 4 back to the state of Figure 2. In the embodiment of Figures 1 to 4 the conical extension 26 closes the branch channel 5 just before or just as the filter 15 contacts the stop 14. The conical extension 26 may of course alternatively have the general form of a truncated cone. If the grooves 19 are omitted, the nozzle will be closed in the position of Figure 3 and will open at a predeterminable decreased pressure. The filter 15 plays only a minor part in creating a pressure drop which governs the function of the nozzle, but a filter is preferred for cleaning the liquid.

In the state of Figure 4 the cross section of the helical path 23 is greater than in Figure 3. The result of this increased cross section is that the rate of liquid flowing out of the orifice 13 does not decrease in proportion to the decreasing liquid pressure but remains at a surprisingly constant rate, although the whirling motion of the liquid fog successively decreases and the droplet size increases.

The force of the spring 20, as well as the dimensions of the annular passages 22 and 27, can be varied according to varying considerations with respect to liquid rate, droplet sizes, desired drive pressures, etc. at different stages of a fire extinguishing procedure. Different spray heads in an installation for fighting fire may be individually adapted, likewise individual nozzles in one spray head may be individually adapted.

In the latter case it is primarily the central nozzle of a spray head, as in Figure 1, that is adapted to differ

This is the replacement sheet

Date: 19 AUG 1998

from the side nozzles; for example in such a way that the spring of that nozzle is somewhat stronger than the springs of the side nozzles, whereby at a decreased liquid pressure it is possible to maintain a relatively forceful liquid spray or jet in the main direction for a longer period of time. This can be utilized for example in a portable pistol-like fire extinguisher device, as shown for example in Finnish patent application no. 924119, in such a way that simultaneously with a forceful liquid jet in the main direction through a central nozzle, a shield of liquid fog is provided by means of the side nozzles, whereby it is possible to approach close to a violent fire developing intense heat. Such a manually manoeuvrable device can without difficulty be constructed in such a way that the operating or liquid pressure can be varied as desired during the extinguishing procedure.

By means of nozzles in accordance with the invention a particularly favourable effect is achieved when hydraulic accumulators according to Finnish patent application no. 924752 (corresponding to WO-A-94/06517) are used as a drive unit. Such hydraulic accumulators have an outlet tube with wall apertures, so that drive gas is mixed into the extinguishing liquid after the gas pressure has decreased to a predeterminable level. In the initial state according to Figure 3 a violently whirling liquid fog with small droplets and a good penetration power is achieved. At the onset of the state according to Figure 4 larger droplets with a good capability for cooling hot surfaces and smouldering fires is achieved. Thereafter, with gradually decreasing drive pressure and increasing amounts of intermixed gas, and gradual return to the state of Figure 2, a total flooding with even smaller droplets than during the initial state of Figure 3 can be maintained for a long period of time.

In fire fighting installations employing a liquid pump as a drive unit, the nozzles in accordance with the invention make it possible to vary the mode of liquid spraying during the extinguishing procedure, by varying the operating pressure of the liquid pump, or by arranging valves for throttling the liquid flow and thereby adjusting the pressure. The operating range of each spray head can therefore be extended and one can manage with fewer spray heads.

This is the replacement sheet

Date: 19 AUG 1998

The spray head shown in Figures 5 to 9, with a central nozzle 30 and side nozzles 31, has in the central nozzle 30 a spindle pin 32 with an axial channel 33 terminating in a throttle 34. A helical spring 35 is disposed around the spindle pin 32 to form a helical flow path 36 along and between the loops of the spring 35. The central nozzle 30 produces in general a rather forceful spray that creates a suction which brings along liquid fog produced by the side nozzles 31. The side nozzles 31 can have a solid spindle pin 37 with a helical spring 35 disposed therearound to form a helical flow path 36. The solid spindle pin 37 preferably has an expanded head portion 38 in order to form an annular passage 39 between the head portion 38 and the surrounding wall of the housing 1, for the same purpose as the conical extension 26 in the embodiment of Figures 1 to 4. The head portion 38 may be formed to block the branch channel 5 in the position of Figure 8.

Figures 6 and 7, and 8 and 9, show, like Figures 2 and 3, the situation at no or low liquid pressure and at a high liquid pressure, respectively. Naturally, the situation corresponding to Figure 4 will occur in use as well.

A spray head incorporating nozzles in accordance with a further embodiment of the present invention is shown in Figures 10 to 14. Side nozzles 6 of the spray head are of the same kind as the side nozzles in Figures 1 to 4. The central nozzle 60 has a holder 61 screwed into the lower end of the central channel 3 of the spray head and includes a whirl chamber 62 at the nozzle orifice. A helical spring 63 is at one end supported against the conical surface of the whirl chamber 62 and at the other end supported against an enlarged plunger-like portion of a spindle 64 which is movable in the central channel 3, said plunger-like portion forming approximately that half of the spindle 64 which is disposed towards the inlet of the central channel 3. Between the plunger-like portion of the spindle 64 and the wall of the central channel 3 there is an annular passage 71. Through the spindle 64 runs an axial channel 65 with a throttle 66 at its inlet and branches 67 to the central channel 3 at a position beyond the plunger-like portion of the spindle 64. The narrower portion 69 of the spindle 64, around which the spring 63 is disposed, can be solid. The loops of the spring 63 form a helical path 70 between the narrow portion 69 of the spindle 64 and the cylindrical portion of the holder 61 screwed into the end

This is the replacement sheet

Date: 19 AUG 1998

of the central channel 3.

In the inactive state (as shown in Figure 10) the spring 63 forces the spindle 64 to abutment against the inlet of the central channel 3. A high pressure liquid flowing therethrough causes such a pressure drop over the throttle 66 and over the annular passage 71 between the plunger-like portion of the spindle 64 and the wall of the central channel 3 that the spindle 64 is driven to the bottom towards the central nozzle 60 (as shown in Figure 11) with the solid narrow portion 69 of the spindle 64, having a preferably conical end, in abutment against the conical surface of the whirl chamber 62. The spring 63 is compressed and the helical path 70 formed by the loops of the spring 63 is narrow and continues beyond the end of the spring 63 in a passage 72 formed between the end of the spindle 64 and the conical surface of the whirl chamber 62 which leads to the nozzle orifice.

A preferred passage 72, which is not clearly visible in Figure 11, is shown in Figures 12 and 13. The conical end surface of the narrow portion 69 of the spindle 64 is indicated by reference sign 73 and a number of preferably oblique grooves, for example two to four grooves, in the conical surface 73 are indicated by reference sign 74. With the arrangement of Figure 12 the central nozzle 60 thus produces a violently whirling liquid fog, in the same manner as the side nozzles 6. The grooves 19 in the embodiment of Figures 1 to 4 are preferably arranged in the same manner. If the grooves 74 are omitted, the nozzle would be closed in the position of Figure 11.

After the liquid pressure has decreased sufficiently, the spindle 64 adopts a position substantially as in Figure 14. In this position the pressure drop over the annular passage 71, the throttle 66 and the helical path 70 balances the force of the spring 63. The helical path 70 is now wider as in Figure 4, and the branch channels 5 to the side nozzles 6 are essentially blocked by the plunger-like portion of the spindle 64. Most of the liquid is now discharged through the central nozzle 60 as a forceful concentrated spray.

An effective pressure fall in the state of Figure 14 can alternatively be brought about by means of the annular passage 71 alone, that is with the throttle 66 blocked. The annular passage 71 would in that case be widened and would permit a correspondingly freer connection to the side nozzles 6 in Figure 14.

This is the replacement sheet

Date: 19 AUG 1998

In general, the spray head of Figures 10 to 14 provides for a wide variation range with respect to droplet sizes through the central nozzle 60, because the movement of the spring 63 is proportionally long with a correspondingly wide variation in the cross section of the helical path 70. Consequently, the operating range of the central liquid jet is extended in the position of Figure 14.

Figure 15 shows a spray head with a number of side nozzles of the same kind as the side nozzles in Figures 1 to 4. In place of the earlier described central nozzle there is arranged a holder 100 for a release ampoule 101 which melts or breaks at a certain temperature. A spindle 102 disposed in the central channel 3 of the spray head is arranged to be forced by a helical spring 103 against the ampoule 101 with a force which alone is not capable of breaking the ampoule 101, but which after the ampoule 101 has melted or broken drives the spindle 102 downwards from the position of Figure 15 and thereby opens liquid connections from the inlet 2 to the side nozzles 6.

The spindle 102 has an axial channel 104 which starts from the end at the inlet 2 and via branches 105 ends in an annular chamber 106 between the wall of the central channel 3 and the opposite end part 107 of the spindle 102, said end part 107 being inserted into the ampoule holder 100 in sealed relation thereto. Towards the inlet end of the spindle 102, the annular chamber 106 is bounded by a plunger portion 108 sealed in relation to the wall of the central channel 3. The annular surface 109 formed by the plunger 108 is equal to that surface of the inlet end of the spindle 102 which is under the influence of the liquid pressure acting in the inlet 2. The liquid pressure in the inlet 2 is thus balanced by the annular surface 109. Therefore, the spray head can be subjected to very high pressures in the inlet 2, including pressure shocks, without risk of breaking the ampoule 101. A spray head as shown in Figure 15 can be used to govern the activation of a plurality of other spray heads according to any of Figures 1 to 14.

## Claims

1. A nozzle, in particular for a spray head, with a housing (7; 61), a spindle element (16, 17; 32; 37; 64) insertable into an essentially cylindrical passage in the housing (7; 61), and a helical spring (20; 35; 63) arranged upstream of the orifice (13) of the nozzle in such a manner that in use liquid is made to flow in the helical path (23; 36; 70) between the loops of the helical spring (20; 35; 63) so as to set the liquid in a strong whirling motion before being discharged through the orifice (13), the helical spring (20; 35; 63) being disposed around the spindle element (16, 17; 32; 37; 64) and at its one end being supported adjacent the orifice (13); characterized in that the helical spring (20; 35; 63) is adapted to exert a force on the spindle element (16, 17; 32; 37; 64) tending to bias the spindle element (16, 17; 32; 37; 64) away from the orifice (13) towards a stop (14), the spindle element (16, 17; 32; 37; 64) being axially movable in the direction of the essentially cylindrical passage in accordance with forces acting thereon, the forces comprising the force of the helical spring (20; 35; 63) and the pressure of the liquid.
2. A nozzle according to claim 1, wherein the helical spring (20) at its other end bears against a flange (21) of the spindle element (16, 17), the flange (21) having a diameter smaller than the diameter of the essentially cylindrical passage and defining an annular passage (22) between the flange (21) and the wall of the essentially cylindrical passage for creating a liquid pressure drop over the annular passage (22), which pressure drop creates a force that acts in a direction opposite to the direction of the force of the helical spring (20).
3. A nozzle according to claim 2, wherein the spindle element (16, 17; 37) has a tapered extension (26; 38) which forms an annular passage (27; 39) with a surrounding housing (1).
4. A nozzle according to claim 3, wherein the tapered extension (26) is arranged to block a feed channel (5) at a predeterminable liquid pressure.



This is the replacement sheet

Date: 19 AUG 1998

5. A nozzle according to claim 2, wherein the movement of the spindle element (16, 17) against the force of the helical spring (20) is limited by the conical surface of a whirl chamber (12).
6. A nozzle according to claim 1, wherein the helical spring (63) at its other end bears against a plunger-like portion of the spindle element (64) which in use is arranged in a channel (3) in a spray head, and the movement of the spindle element (64) in the channel (3) is in one end position limited by a stop at the inlet (2) of the spray head and in the other end position limited by the housing (61) adjacent the orifice, and comprising an annular passage (71) between the plunger-like portion of the spindle element (64) and the surrounding wall of the channel (3), the passage (71) being in communication with the helical path (70).
7. A nozzle according to claim 6, wherein the movement of the spindle element (64) is in the other end position limited by the conical surface of a whirl chamber (62).
8. A nozzle according to claim 6, wherein the spindle element (64) has an axial channel (65) which beyond the plunger-like portion of the spindle element (64), as viewed in the direction from the inlet (2) of the spray head, is in communication with the helical path (70) running between the loops of the helical spring (63).
9. A nozzle according to claim 8, wherein the axial channel (65) has a throttled inlet (66).
10. A nozzle according to claim 1, wherein the spindle element (16, 17; 32; 37; 64) contacts the conical surface of a whirl chamber (12; 62) by means of an end surface (18; 73) which has a plurality of oblique grooves to provide a path between the abutting end surface (18; 73) of the spindle element (16, 17; 32; 37; 64) and conical surface of the whirl chamber (12; 62).
11. A nozzle according to claim 1, wherein the spindle element (16, 17; 64) by means of an end surface (18; 73) sealingly engages against the conical surface of a whirl chamber (12; 62).

This is the replacement sheet

Date: 19 AUG 1998




**ABSTRACT**


**NOZZLE WITH HELICAL SPRING WHICH SETS LIQUID IN WHIRLING MOTION**

The object of the invention is to provide a new nozzle which in particular is suitable for use in such spray heads for fire fighting which operate with a high liquid pressure. Inside the orifice (13) of the nozzle is arranged a helical spring (20) in such a manner that the liquid is brought to flow along a helical path (23) between the loops of the spring, whereat the liquid is set into a strong whirling motion before leaving the orifice of the nozzle.


(Figure 3)

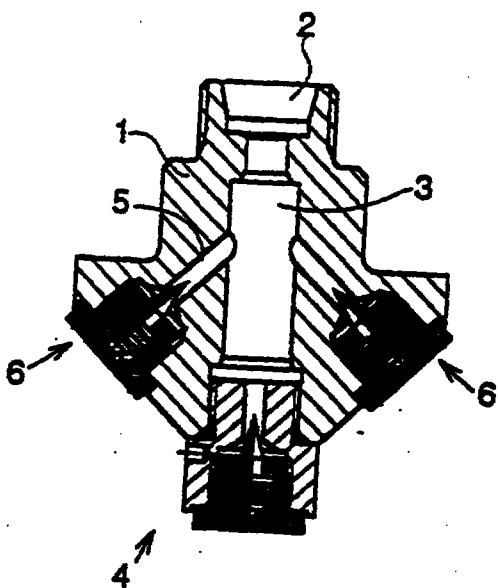


**Fig. 1**

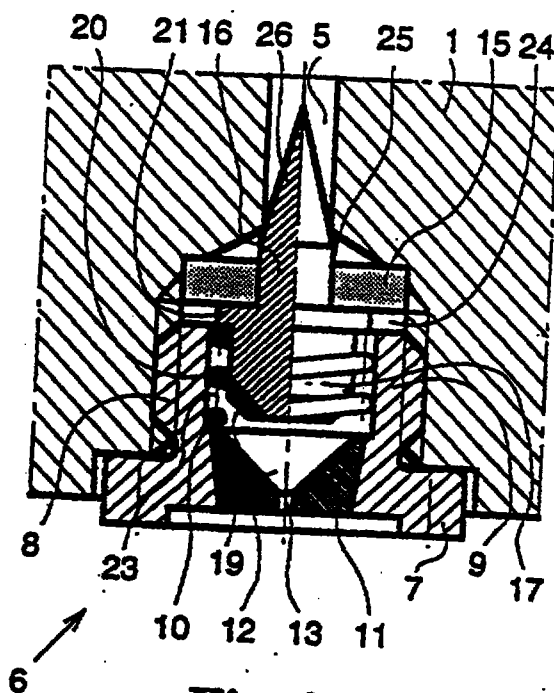


**Fig. 2**

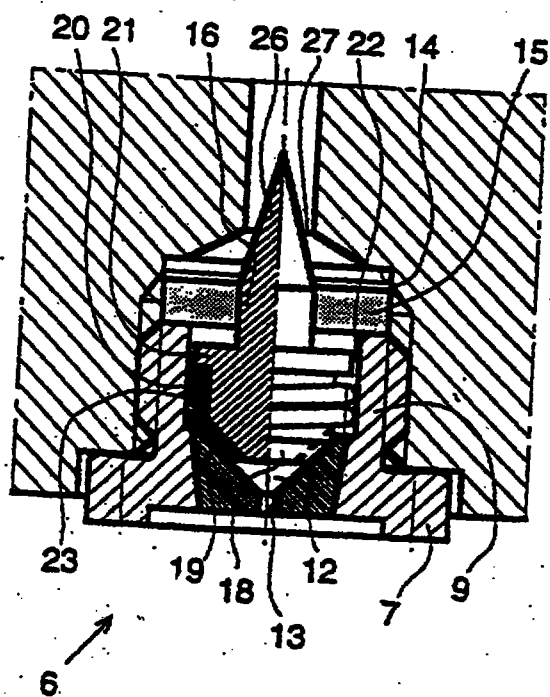


**Fig. 3**

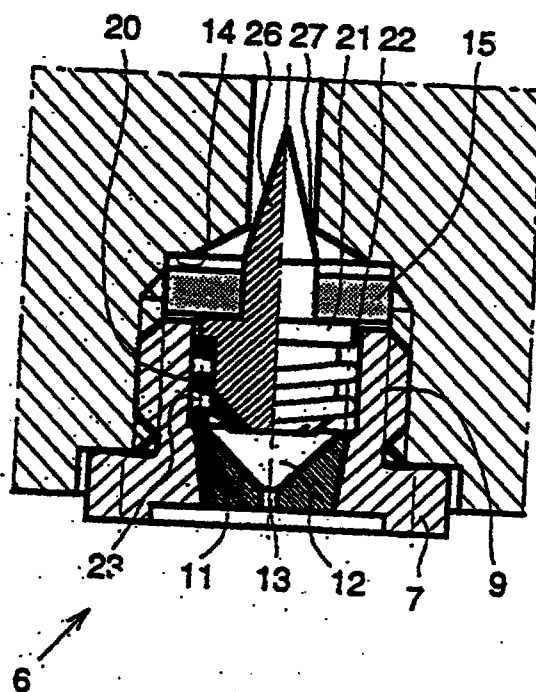


**Fig. 4**

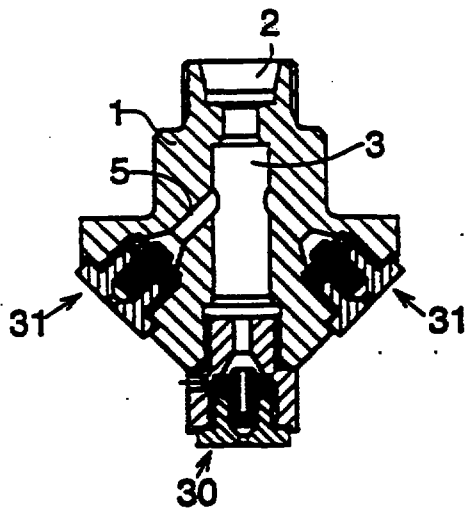


**Fig. 5**

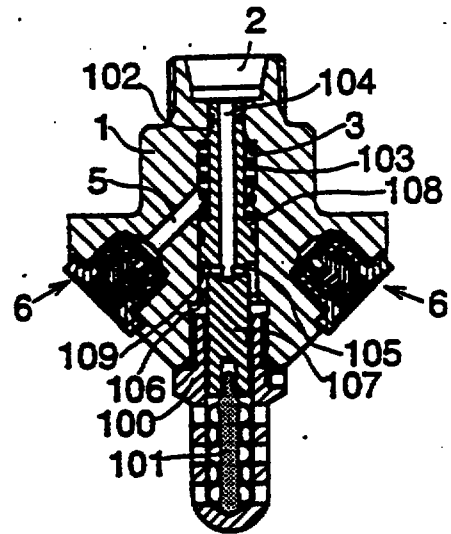


**Fig. 15**

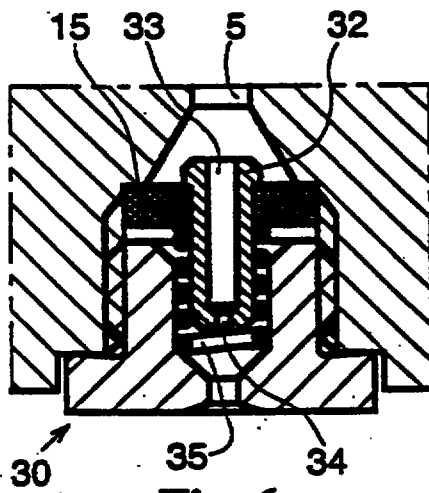


**Fig. 6**

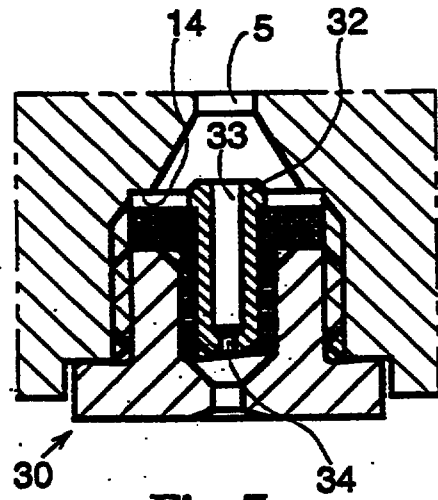

**Fig. 7**

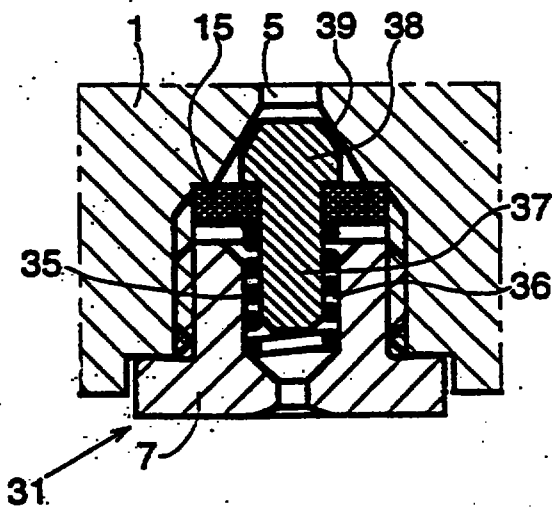


**Fig. 8**

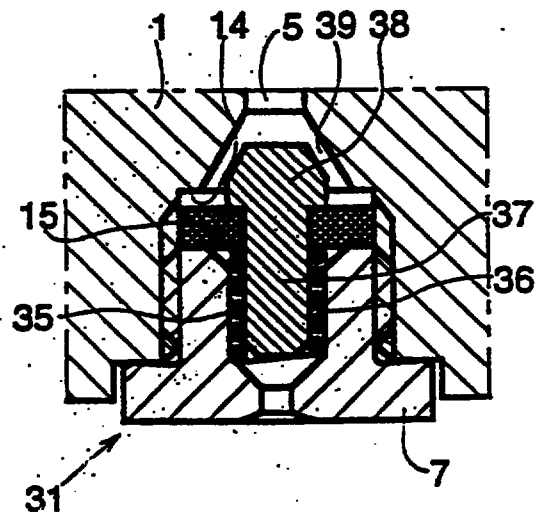


**Fig. 9**

This is the replacement sheet


Date: 19 AUG 1998

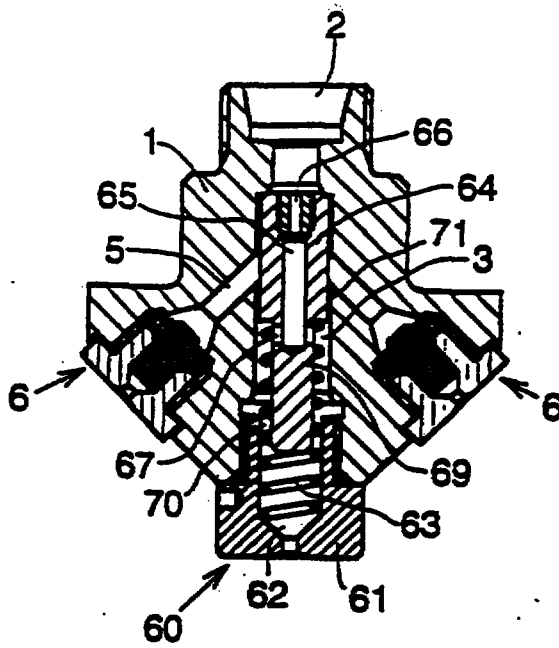


**Fig. 10**

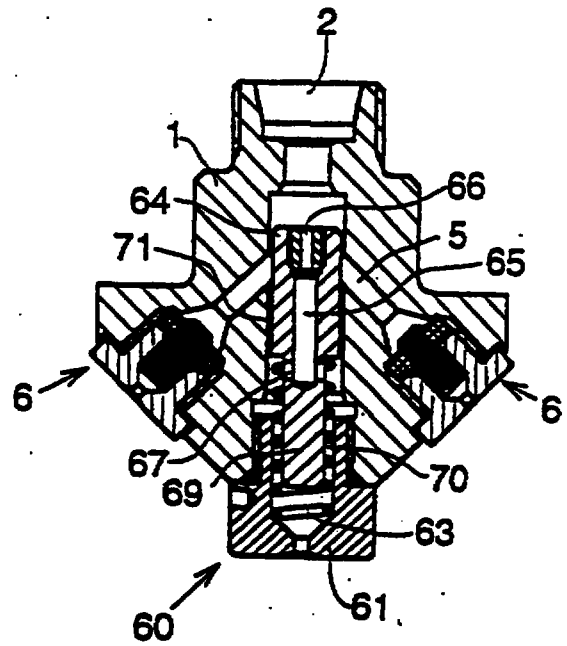

**Fig. 14**

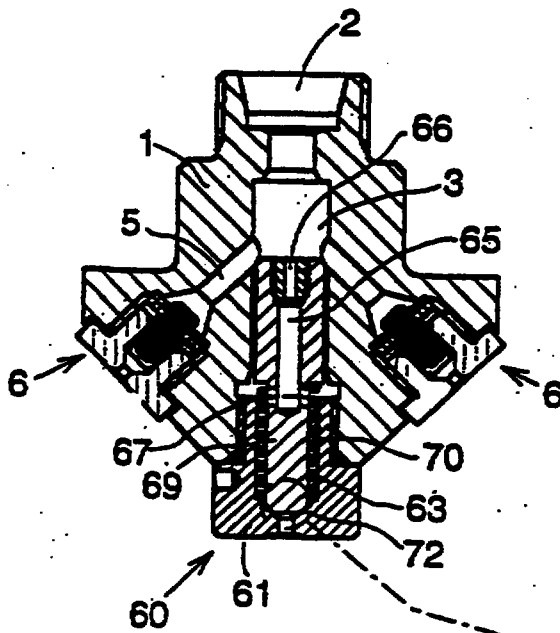

**Fig. 11**

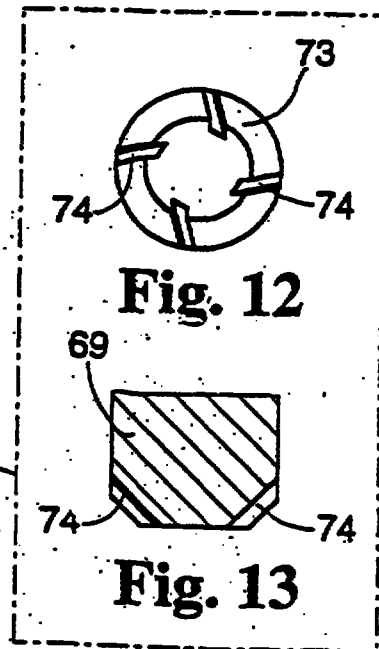

This is the replacement sheet

Date: 19 AUG 1998