



(51) International Patent Classification:

B63B 21/56 (2006.01) **B63B 35/79** (2006.01)
B63B 35/68 (2006.01) **B63H 9/06** (2006.01)

(21) International Application Number:

PCT/NL2009/050390

(22) International Filing Date:

1 July 2009 (01.07.2009)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2001758 4 July 2008 (04.07.2008) NL

(72) Inventor; and

(71) Applicant : **ZWIJNENBERG, Evert Hendrik Willem**
[NL/NL]; Snippendaalseweg 12, NL-6991 JK Rheden (NL).

(74) Agent: **VAN BREDA, Jacques**; Weteringschans 96,
NL-1017 XS Amsterdam (NL).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,

HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(88) Date of publication of the international search report:

22 July 2010

(54) Title: VESSEL AND METHOD FOR TRANSFERRING A FORCE TO OR FROM SUCH A VESSEL

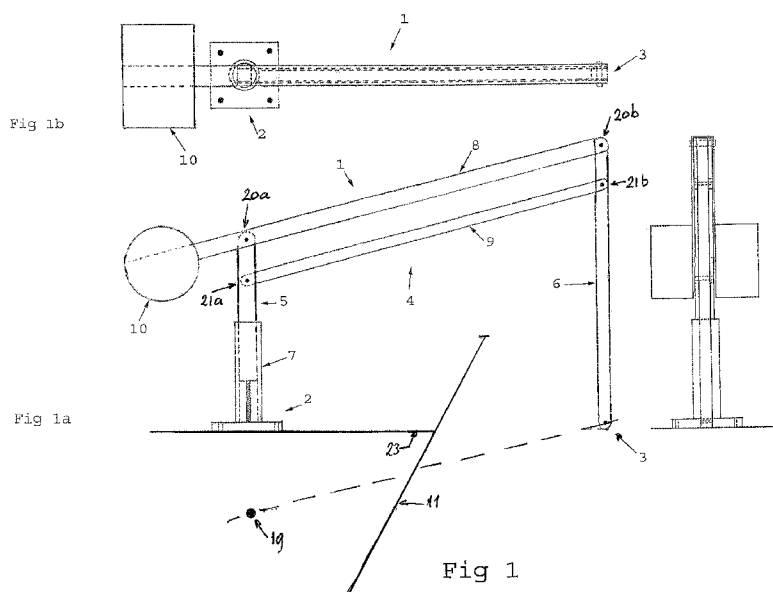

(57) Abstract: Vessel provided with a mechanism (1) having a first arm (5) which is positioned thereon, and a second arm (6) having a movable extremity (3) distant from the first arm, wherein said first arm and said second arm are connected to each other with at least one link having hinges (20a, 20b, 21a, 21b) on opposite sides of said at least one link (8, 9) that connect said link or links to the first arm and second arm respectively, and wherein the length of the second arm (6) is selected so as to arrange that when the hinges on the opposite sides of said links are at the same level, the movable extremity of the second arm is level with a predetermined position within the vessel.