



(51) International Patent Classification:
F04B 39/02 (2006.01)

(21) International Application Number:
PCT/BR2009/000335

(22) International Filing Date:
7 October 2009 (07.10.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
PI0804302-7 7 October 2008 (07.10.2008) BR

(71) Applicant (for all designated States except US):
WHIRLPOOL S.A. [BR/BR]; Avenida das Nações Unidas, 12.995 - 32º, andar - Brooklin Novo, 04578-000 São Paulo - SP (BR).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **HÜLSE, Emilio, Rodrigues** [BR/BR]; Rua Max Colin, 1214 - Ap. 204, 89204 - 000 Joinville - SC (BR). **JOVITA, Luiz, Fabiano** [BR/BR]; Rua Iguaçu, 143 - Ap. 203A, 89218 - 180 Joinville - SC (BR). **LOPES, Andréa** [BR/BR]; Rua Franklin Roosevelt, 52, 89227-600 Joinville - SC (BR).

(74) Agents: **ARNAUD, Antonio M., P.** et al.; Rua José Bonifácio, 93 - 9th floor, 01003-901 São Paulo - SP (BR).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: MOUNTING ARRANGEMENT FOR AN OIL PUMP IN A REFRIGERATION COMPRESSOR

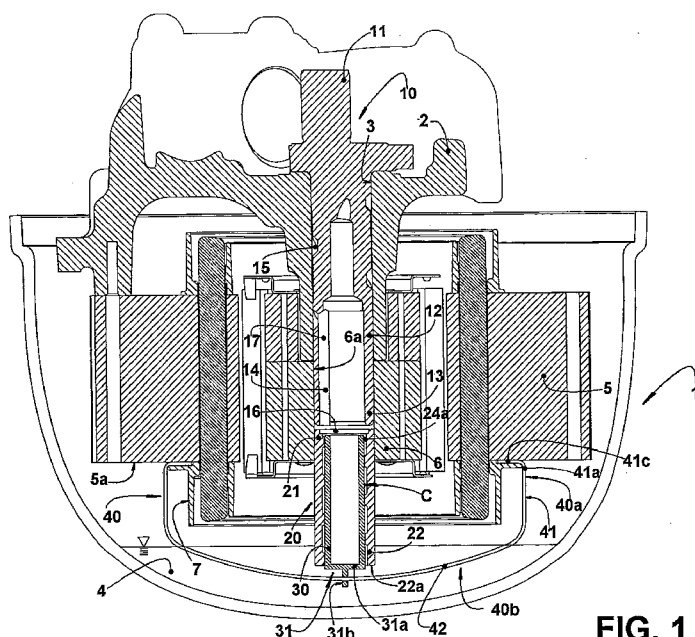


FIG. 1

(57) Abstract: The refrigeration compressor comprises a cylinder block (2) carrying a crankshaft (10) and a stator (5) of an electric motor, whose rotor (6) is mounted to the crankshaft (10); and an oil pump presenting: a tubular sleeve (20) affixed to the crankshaft (10) or to the rotor (6) and having a pump body (30) internal to the tubular sleeve (20) and carried by the cylinder block (2) or by the stator (5). A fixation rod (40) is superiorly articulated to the cylinder block (2) or to the stator (5) and has a lower portion (40b) angularly and freely displaced orthogonally to the articulation axis and around which the lower end portion (31) of the pump body (30) is axially retained and slidably mounted, orthogonally and coplanar to the rotation axis of the rotor (6). The tubular sleeve (20) is provided with an upper tubular portion (21) having a circumferential groove (25), which fits and retains, rotationally and axially, a tubular metallic connector (50) telescopically mounted and retained to the rotor (6) or to the crankshaft (10).