

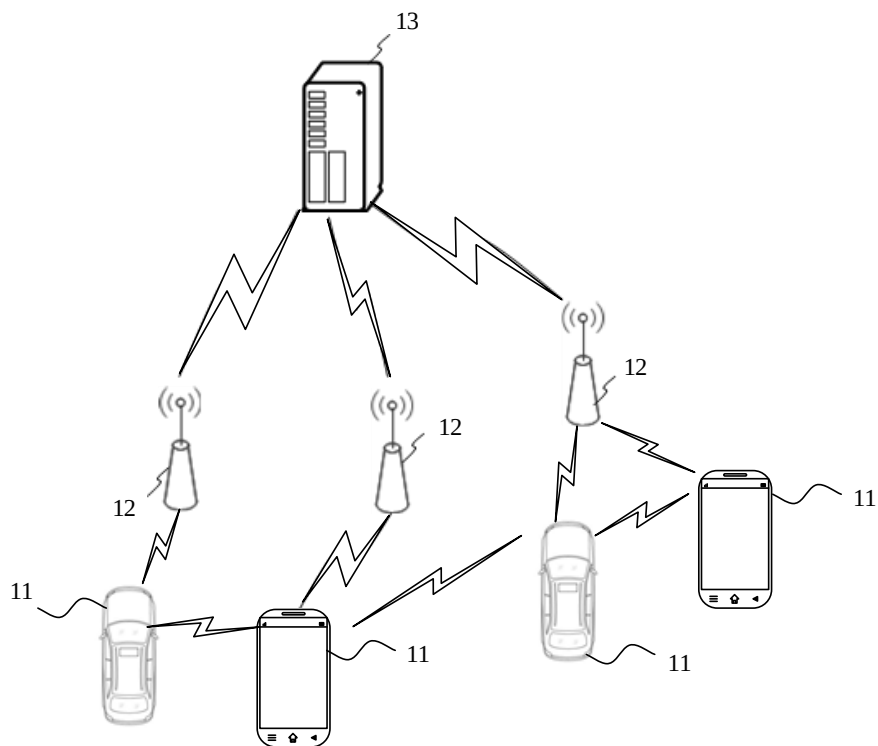


FIG. 1

S110: transmitting first time interval information of uplink transmission and downlink reception between the UE and a positioning node to a core network device, in which the first time interval information is used to determine position information of the UE

FIG. 2

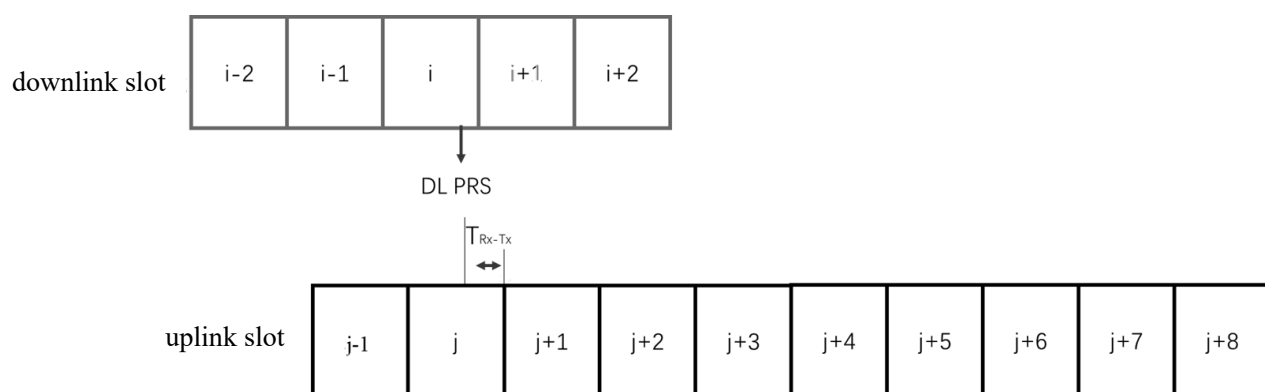


FIG. 3

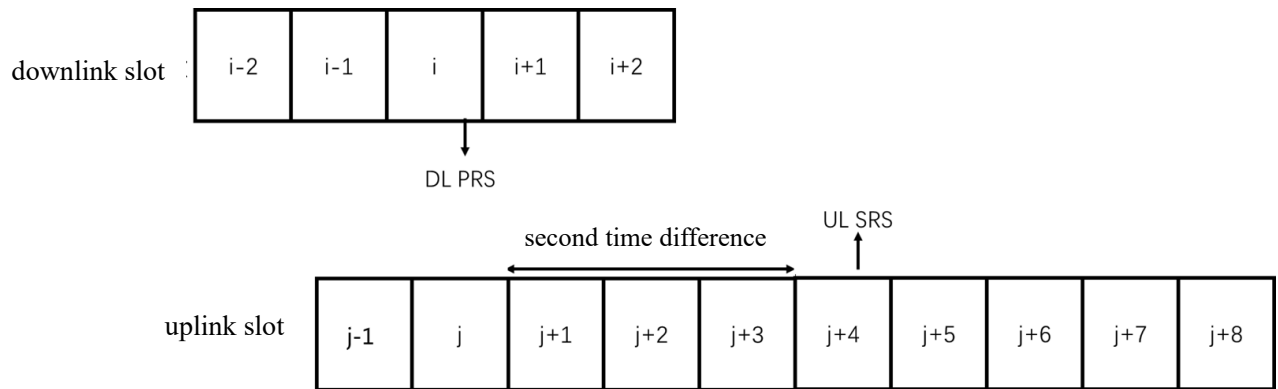


FIG. 4

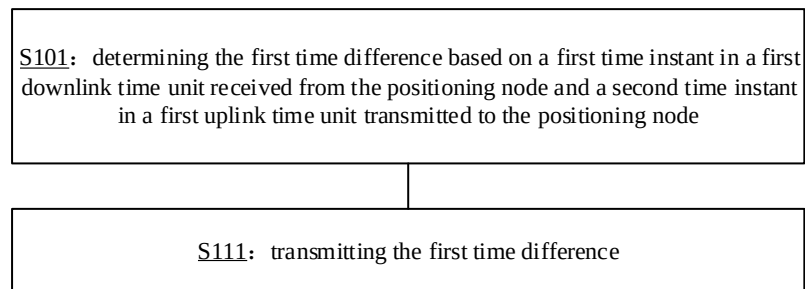


FIG. 5

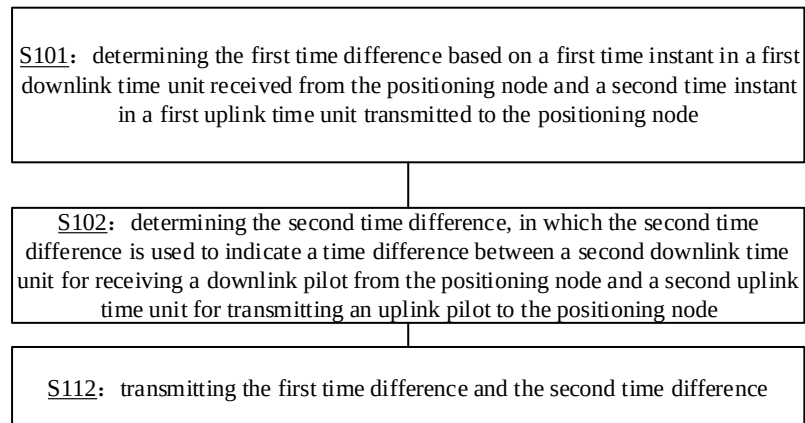


FIG. 6

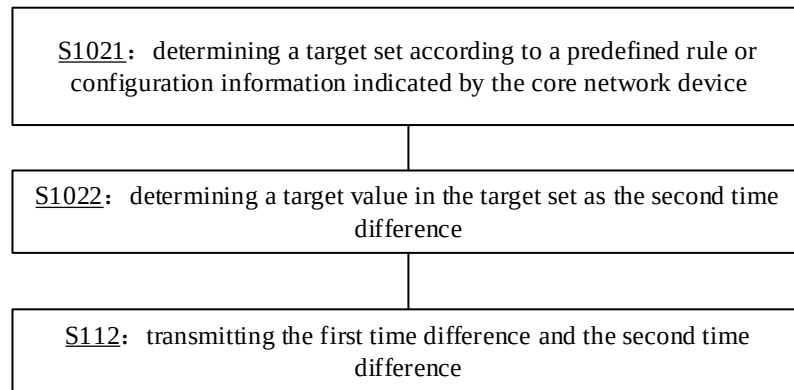


FIG. 7

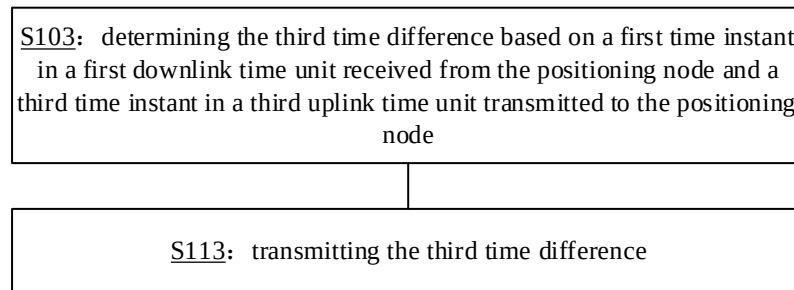


FIG. 8

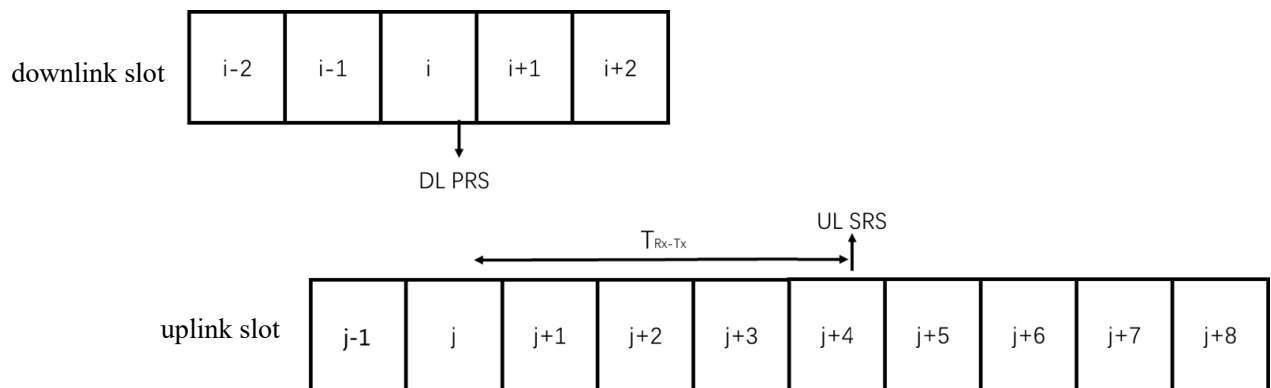


FIG. 9

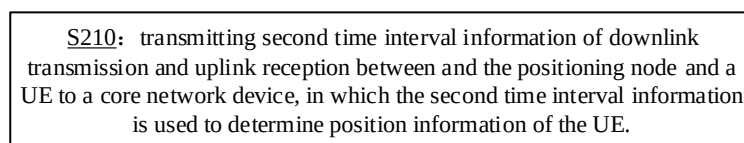


FIG. 10

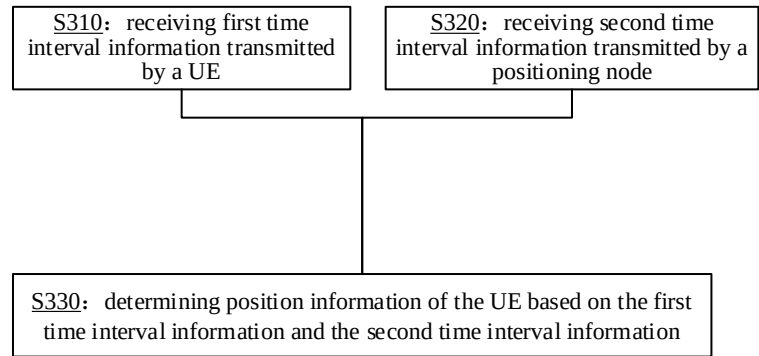


FIG. 11

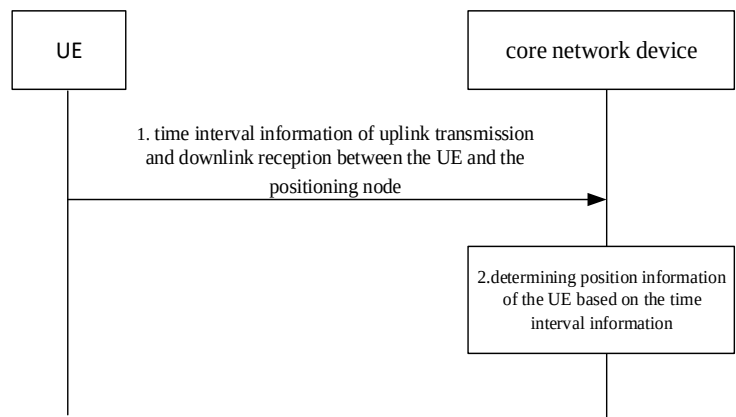


FIG. 12

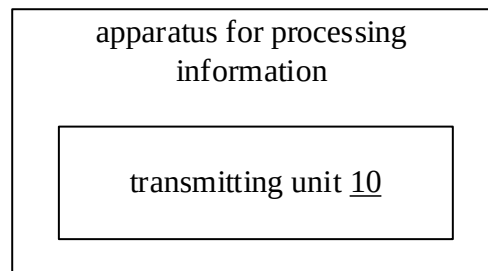


FIG. 13

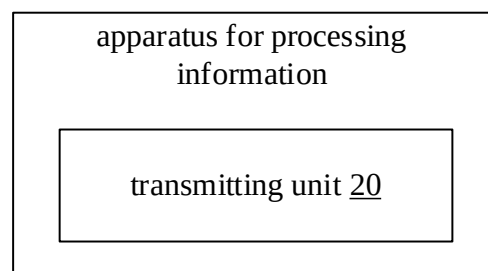


FIG. 14

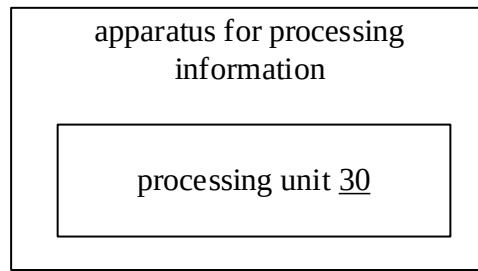


FIG. 15

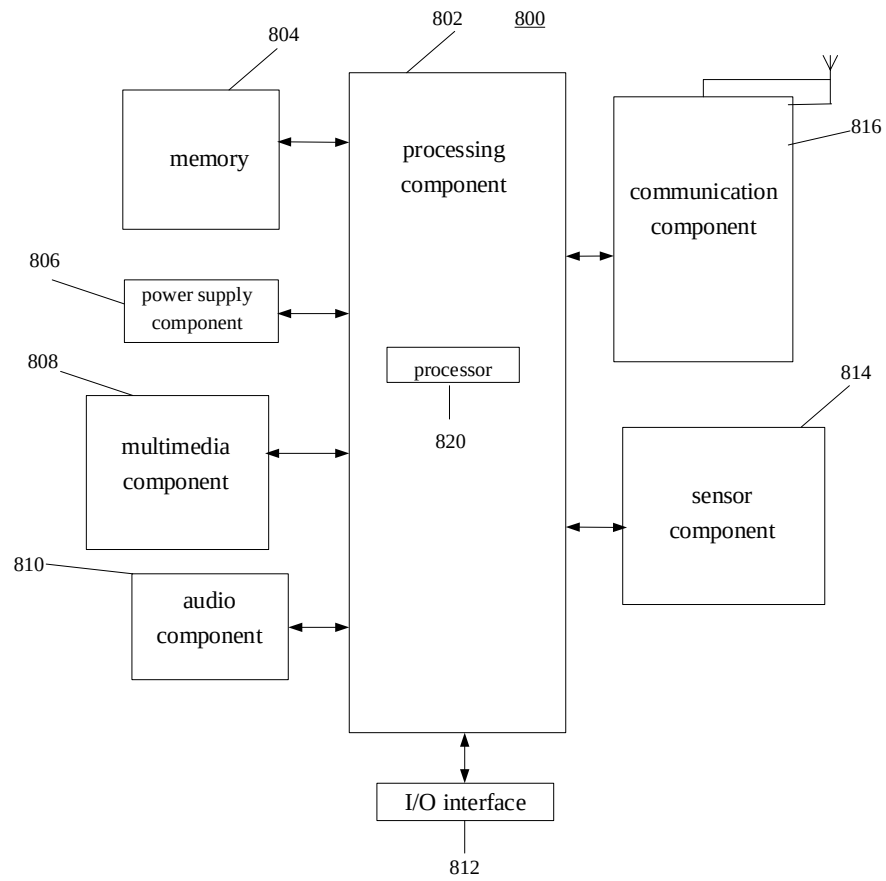


FIG. 16

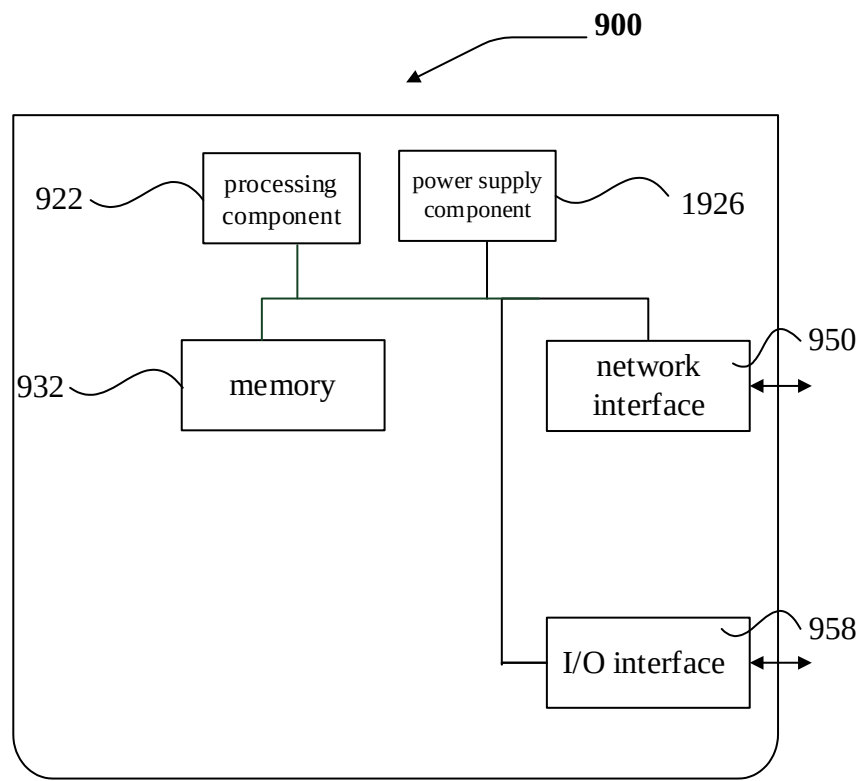


FIG. 17