

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
27 May 2004 (27.05.2004)

PCT

(10) International Publication Number
WO 2004/044280 A3

(51) International Patent Classification⁷: **D01D 5/06**,
1/06, 4/02, 5/30

Teg Down Meads, Winchester, Hampshire SO22 5NG
(GB).

(21) International Application Number:
PCT/EP2003/013031

(74) Agent: **WHITE, Nicholas, J.**; Rouse Patents, Windsor
House, Cornwall Road, Harrogate HG1 2PW (GB).

(22) International Filing Date:
14 November 2003 (14.11.2003)

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR,
CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD,
GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR,
KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN,
MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU,
SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0226576.7 14 November 2002 (14.11.2002) GB

(84) Designated States (*regional*): ARIPO patent (BW, GH,
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE,
SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (*for all designated States except US*):
SPINTEC ENGINEERING GMBH [DE/DE]; Cannstat-
ter Strasse 48, 70734 Fellbach (DE).


(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **VOLLRATH,**
Friedrich, Wilhelm, Ludwig, Paul [DE/GB]; Upper
Woods Farm, Islip Road, Beckley, Oxford, Oxfordshire
OX3 9TF (GB). **KNIGHT, David, Philip** [GB/GB]; 107

Published:
— with international search report

[Continued on next page]

(54) Title: APPARATUS AND METHOD FOR FORMING MATERIALS

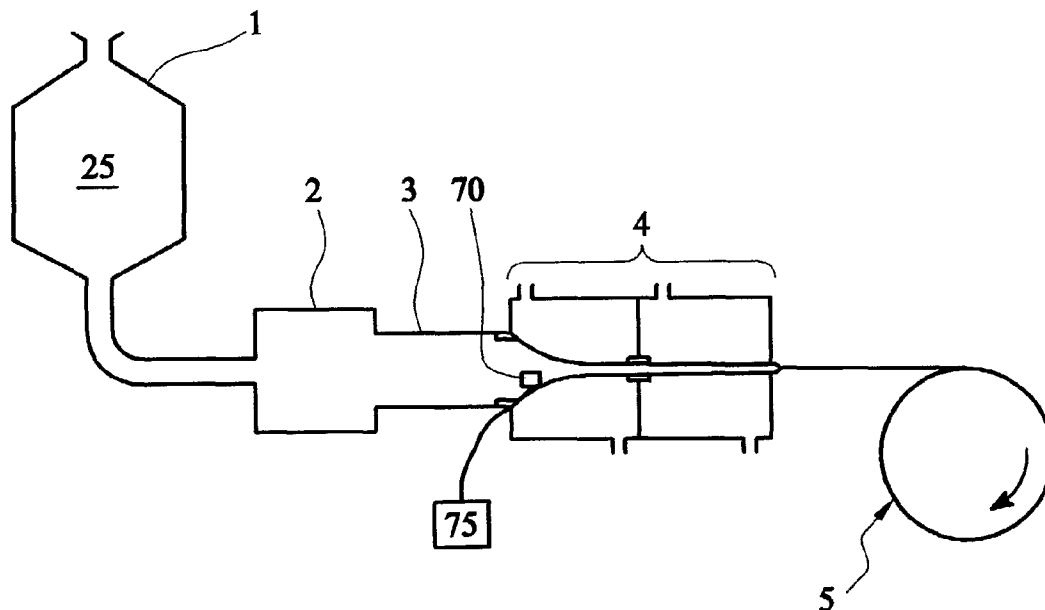

(57) Abstract: The application relates to an extrusion apparatus, which comprises at least one first reservoir (1) connected at a first end to a first opening of a plurality of regulatory modules (4). The regulatory modules or spinnerets contain tubular passages (17) through which dope material (25) is extrudable. The extrusion apparatus (4) has at least 1,000 of the tubular passages (17) per square metre crosssection.

WO 2004/044280 A3



— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(88) Date of publication of the international search report:

18 November 2004