




[図1]

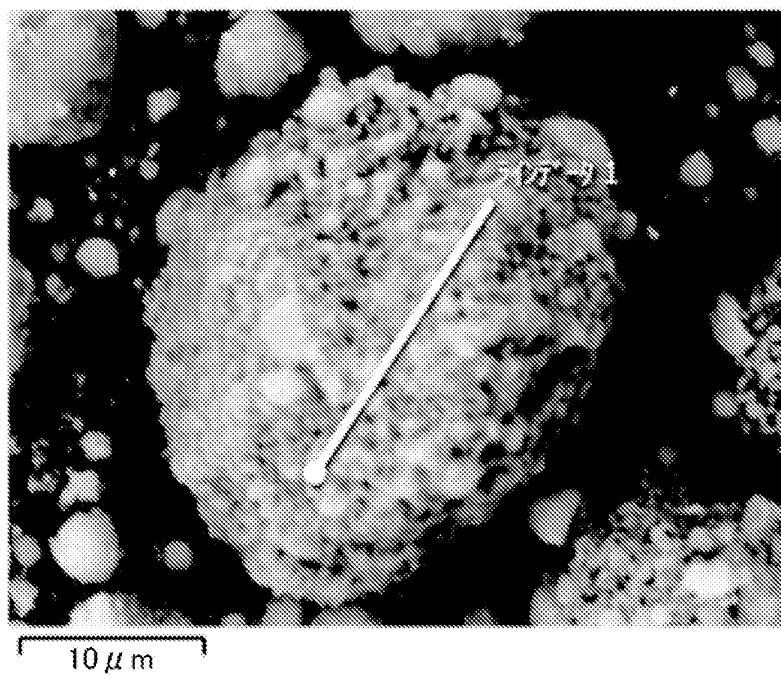


[図2]

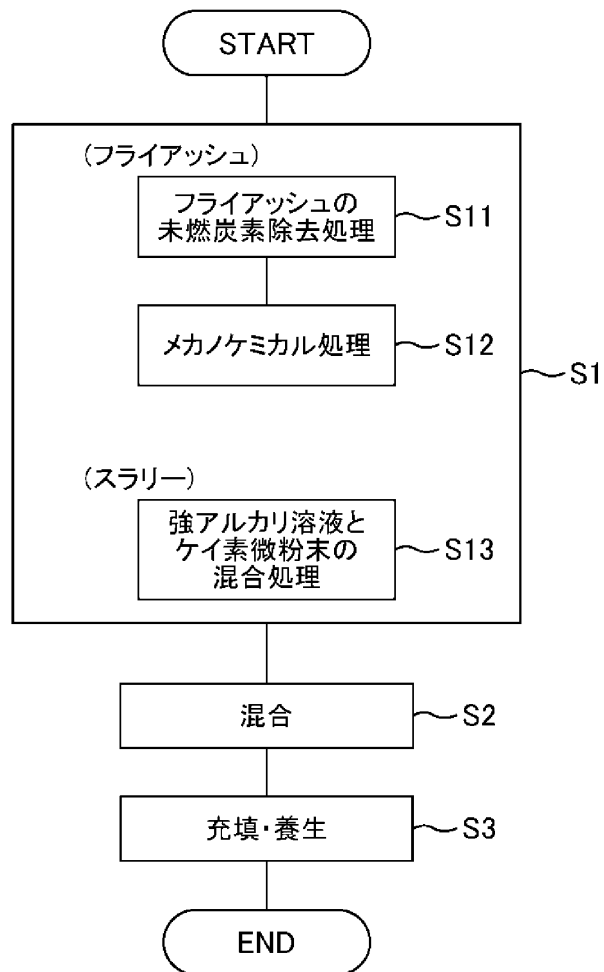

[図3]

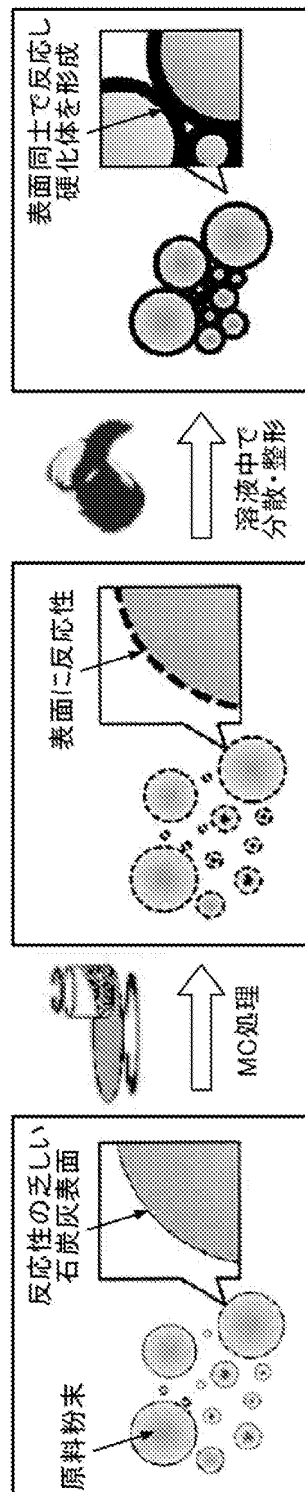

[図4]

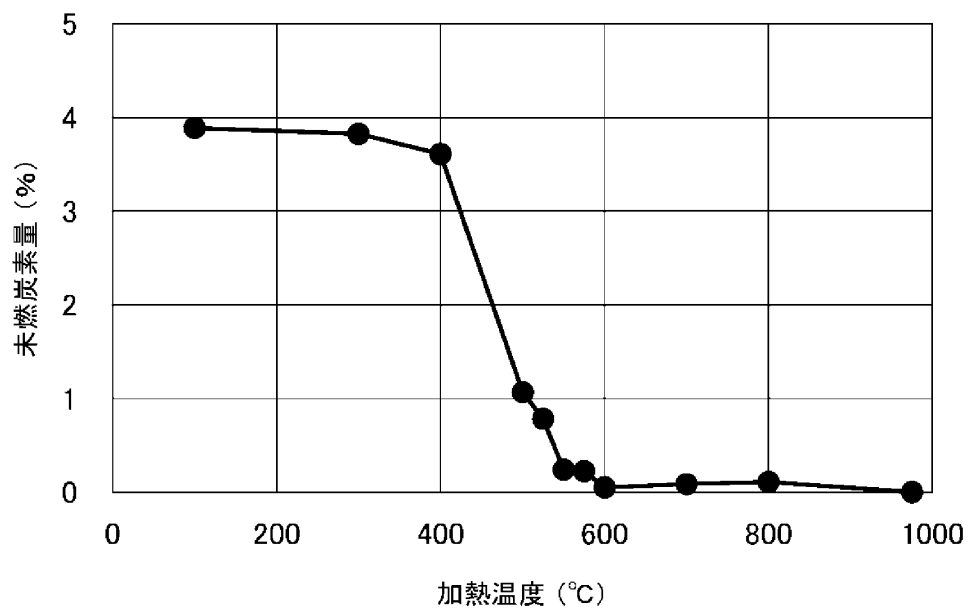


[図5]

材料	備考
集じん灰 (礫子3)	礫子火力発電所産
スラリー	フジインコーポレーテッド製


[図6]

	加熱温度 (℃)	配合 (g)			W/B (%)	スラリー (SF) + (KOH)
		結合材 (B)		混練水 (W)		
		石炭灰	SF	KOH溶液		
比較例	室温(加熱無し)	70	2.21	23.47	32.5	25.68
実施例	400	70	2.21	23.47	32.5	25.68
	500	70	2.21	23.47	32.5	25.68
	525	70	2.21	23.47	32.5	25.68
	535	70	2.21	23.47	32.5	25.68
	550	70	2.21	23.47	32.5	25.68
	575	70	2.21	23.47	32.5	25.68
	600	70	2.21	23.47	32.5	25.68
	700	70	2.21	23.47	32.5	25.68


[図7]

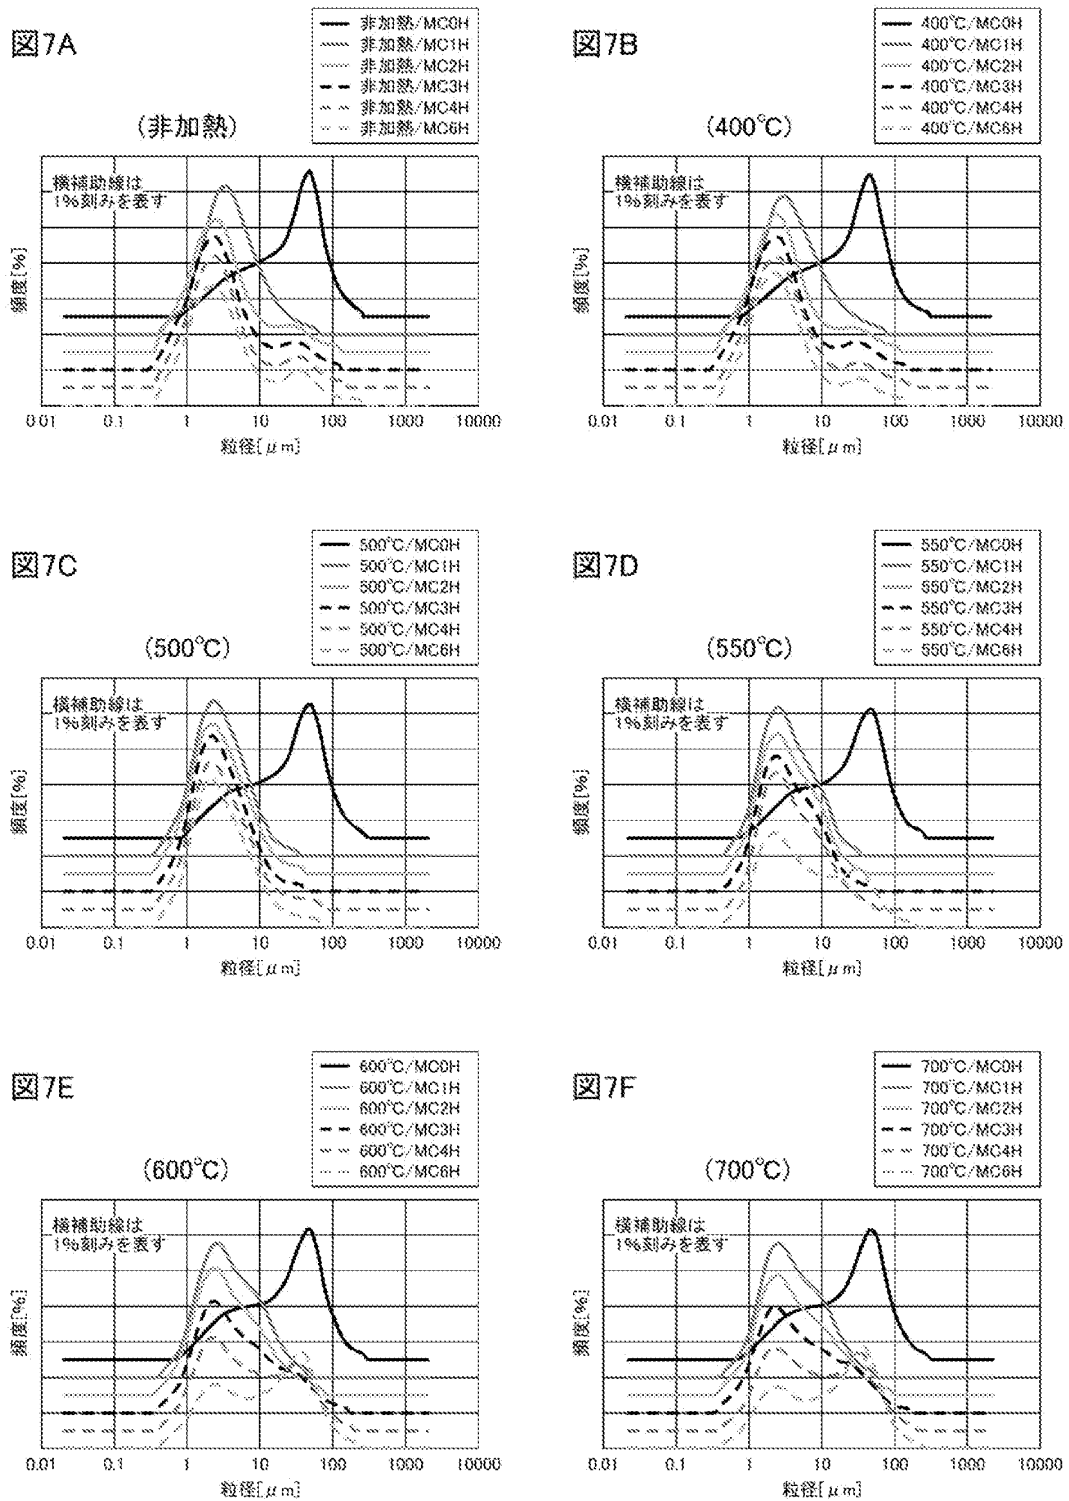


[図8]

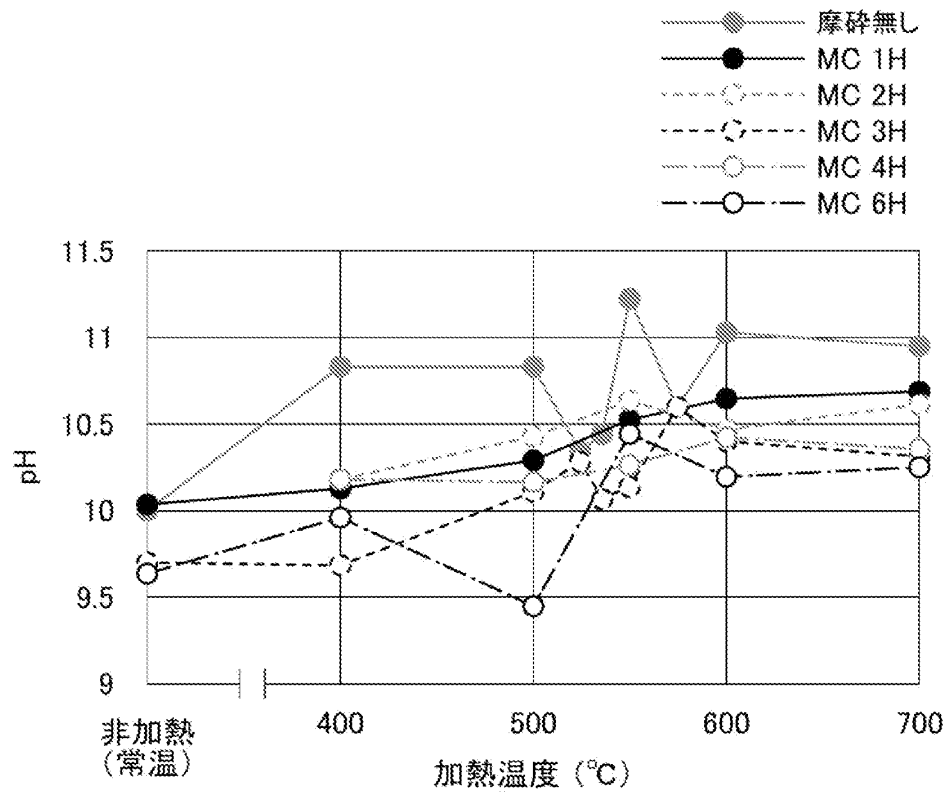


[図9]

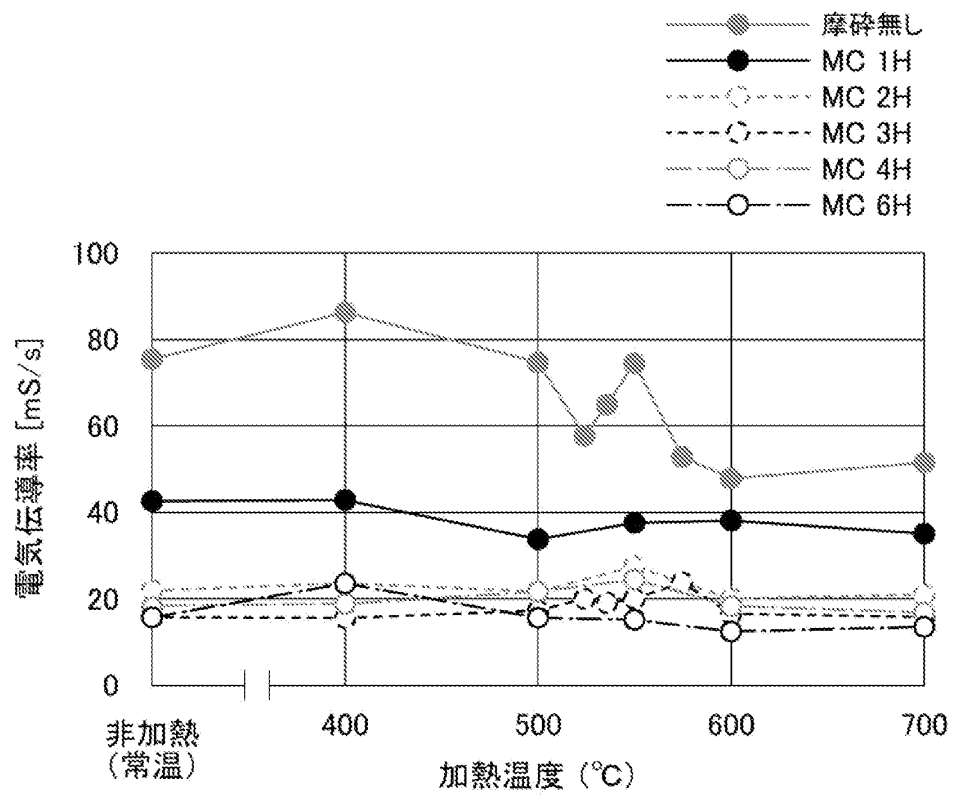


[図10]

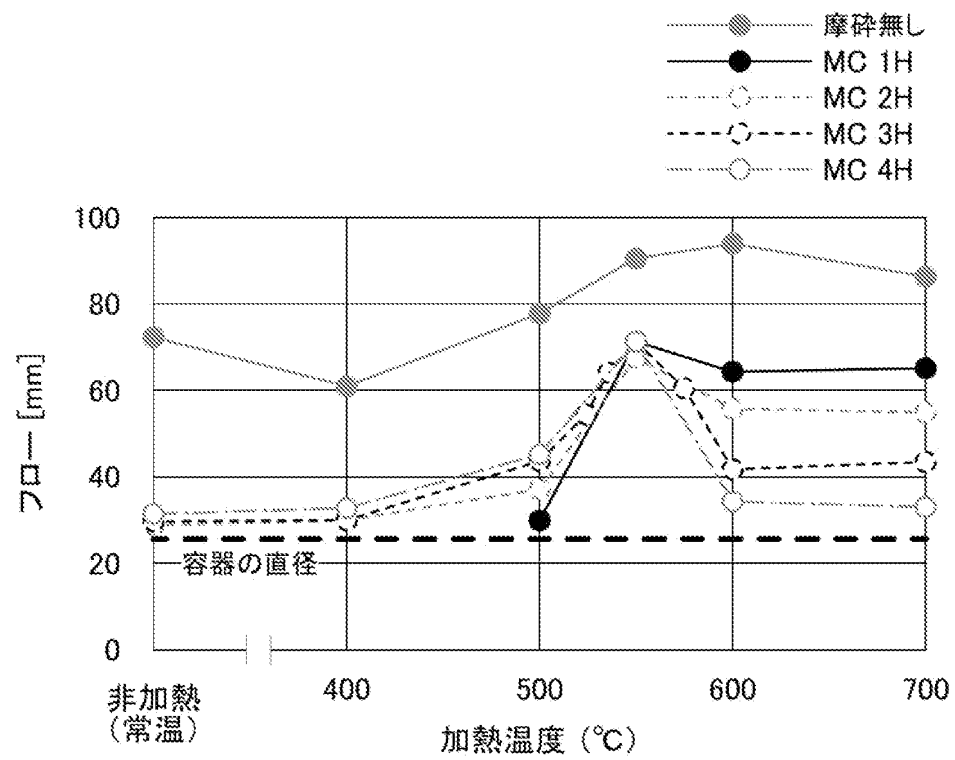


[図11]

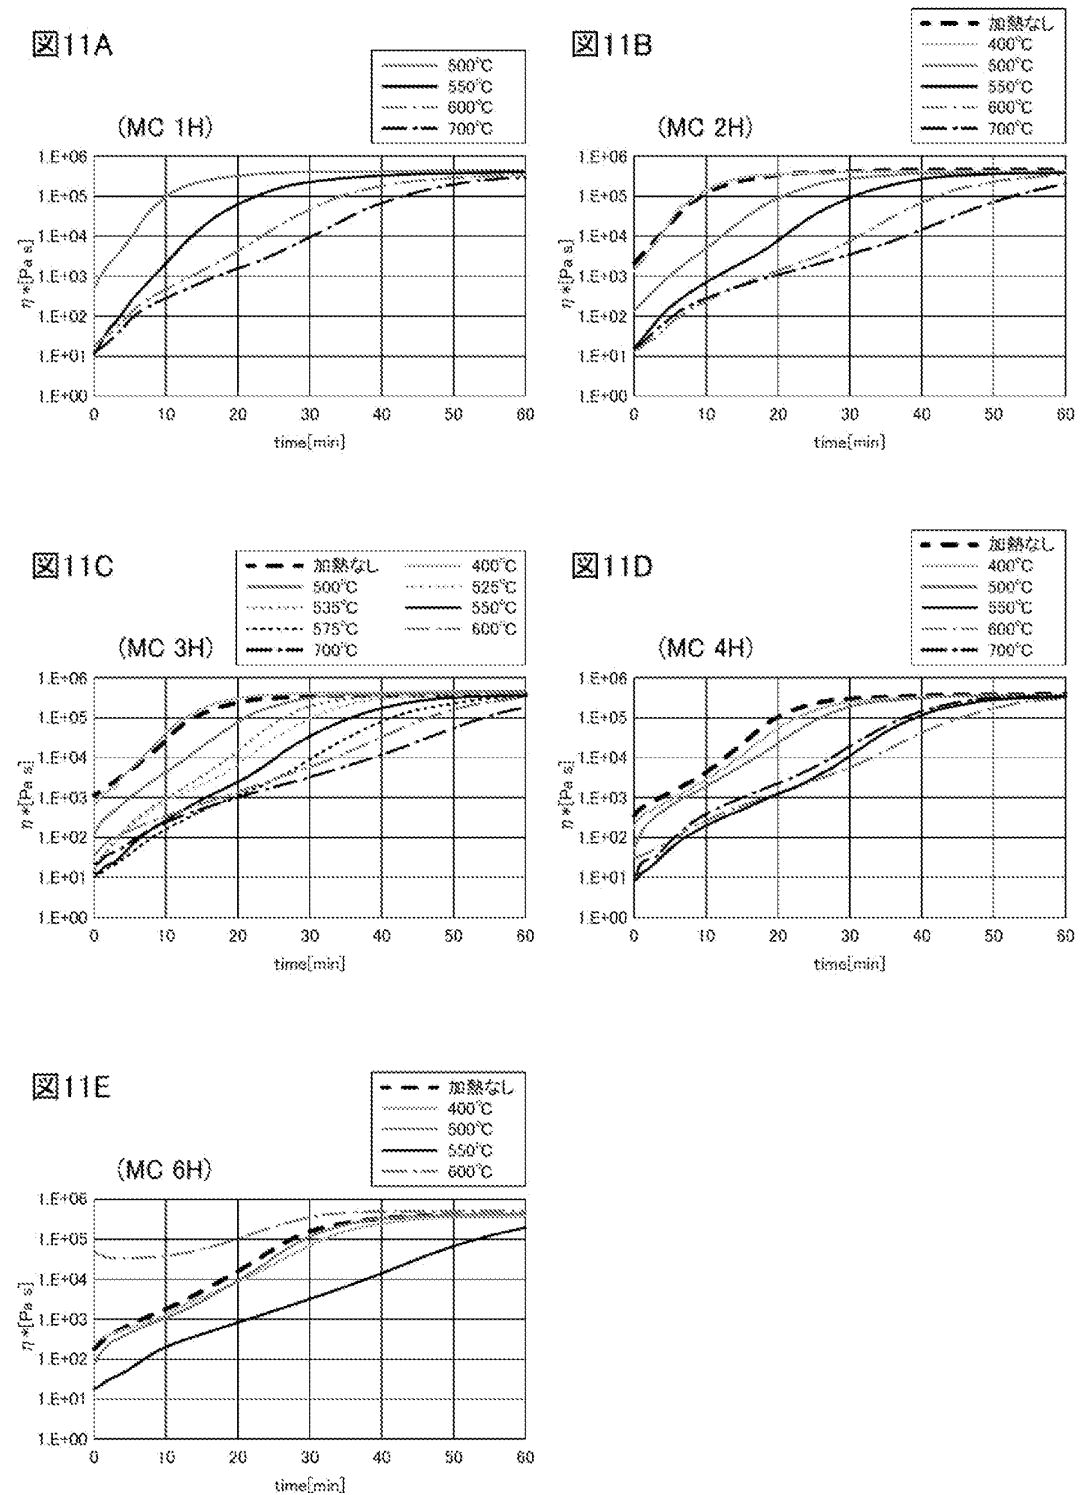

[図12]

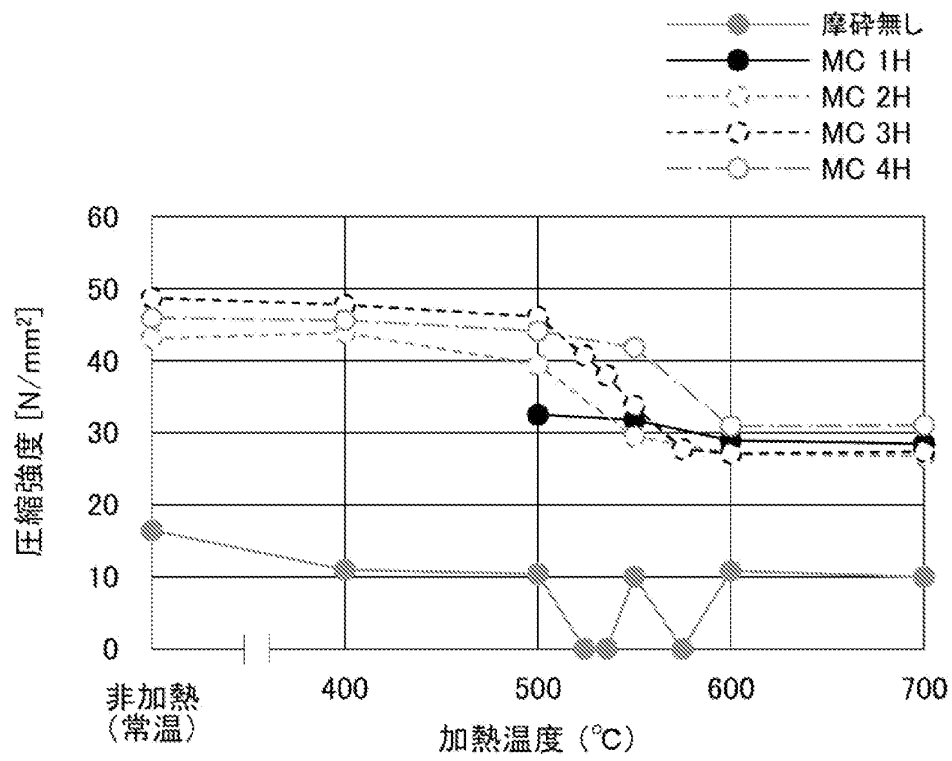

[図13]

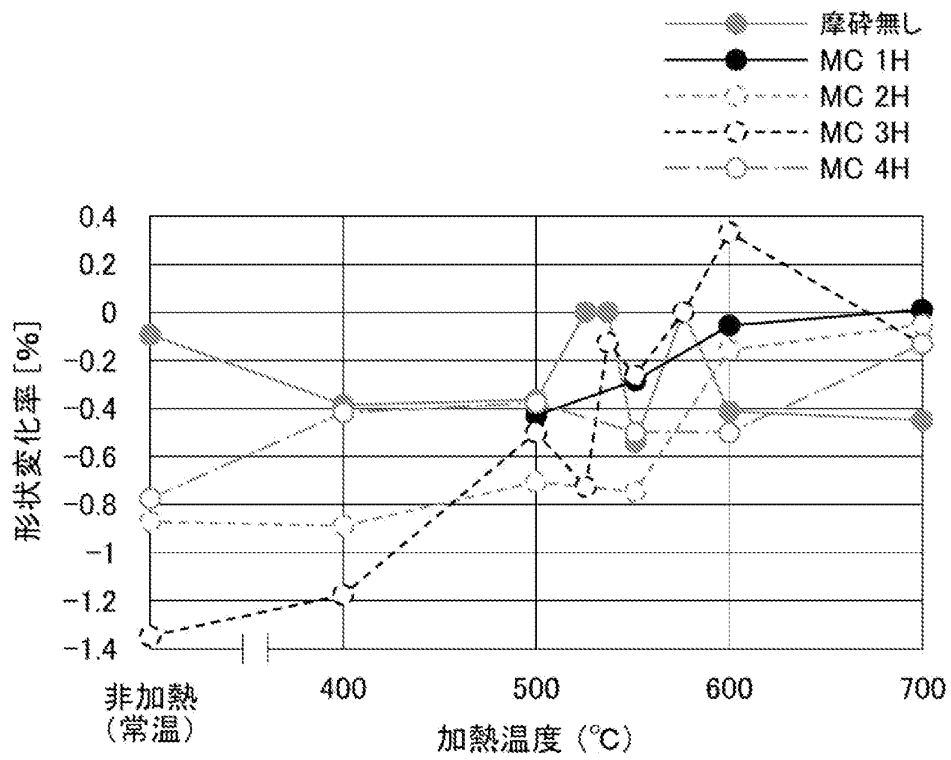

[図14]

