

DESCRIPTION

METHOD FOR PRODUCING OLEFIN POLYMER

5 Technical Field

[0001]

The present invention relates to methods for producing olefin polymers. In particular, the present invention relates to a method for producing an olefin polymer, with
10 which an olefin polymer having good particle properties can be produced in high activity and contamination inside polymerization vessels such as on vessel walls and impellers can be reduced.

Background Art

15 [0002]

Olefin polymers such as polyethylene, polypropylene, ethylene/ α -olefin copolymers, and propylene/ α -olefin copolymers are produced by (co)polymerizing olefins in the presence of an olefin polymerization catalyst such as a
20 metallocene-based solid catalyst composed of a solid catalyst containing a metallocene compound of a group 4 metal such as zirconium and an organoaluminum component, for example.

[0003]

However, in some cases, slurry polymerization of olefins
25 in the presence of such a metallocene-based solid catalyst

produces polymer masses and causes sheeting of polymers in the polymerization vessel and causes polymers to adhere to the impeller or vessel wall, thereby failing to achieve long-term stable operation. Gas-phase polymerization of olefins
5 in the presence of such a metallocene-based solid catalyst in a fluidized bed reactor in some cases produces polymer masses and causes sheeting of polymers in the fluidized bed and decreases the flowability of polymer particles, thereby causing an inhomogeneous polymerization state in the
10 fluidized bed and failing to achieve stable long-term continuous operation.

[0004]

Chemical systems such as petroleum distillation refinery plants and polyolefin manufacturing plants suffer from
15 problems of a decreased heat exchange capability and pipe clogging caused by fouling. This may lead to instability of manufacturing operation and, in worst cases, plant shutdown. Avoiding such situation is thus highly desirable.

[0005]

20 In order to address these problems, for example, Patent Literature 1 (Hereinafter "Patent Literature" is referred to PTL, such as PTL 1) discloses a method in which a higher aliphatic amide is added to a powder flowing environment field for polyolefin production. However, according to this
25 method, the activity of the polymerization catalyst used in

polyolefin production decreases and the catalyst cost increases. PTL 2 discloses polymerization process that uses a catalyst constituted by a solid catalyst prepared by olefin prepolymerization and a surfactant supported on the solid catalyst. According to PTL 3, polymerization is conducted by feeding a surfactant during polymerization in the presence of a solid catalyst prepared by prepolymerization of olefins. However, although these techniques offer some effects of preventing adhesion of polymers to the impeller and vessel wall, the polymerization activity significantly decreases. An effective polymerization method that can achieve high activity while reducing the contamination on the vessel wall and the impeller has not yet been found.

Citation List

15 Patent Literature

[0006]

PTL 1: Japanese Unexamined Patent Application Publication No.
2000-313717

PTL 2: Japanese Unexamined Patent Application Publication No.
20 2000-297114

PTL 3: Japanese Unexamined Patent Application Publication No.
2000-327707

Summary of the Invention

Technical Problem to be solved

25 [0007]

An object of the present invention is to provide a method for producing an olefin polymer with which an olefin-based polymer having good particle properties can be produced in high activity, contamination inside the polymerization vessel, such as on a vessel wall or an impeller, can be effectively prevented, and stable long-term operation is possible.

Solution to the Problem

[0008]

10 A method for producing an olefin polymer according to the present invention is characterized in that in the presence of

(A) a solid catalyst component for olefin polymerization,

(B) an aliphatic amide, and

15 (C) an organoaluminum compound,

at least one olefin selected from the group consisting of ethylene and α -olefins having 3 to 20 carbon atoms is (co)polymerized in a polymerization vessel.


[0009]

20 According to the method for producing an olefin polymer of the invention, the aliphatic amide (B) and the organoaluminum compound (C) are preferably preliminarily mixed with each other and then added to the polymerization vessel.

25 [0010]

According to the method for producing an olefin polymer of the invention, the aliphatic amide (B) is preferably represented by general formula (I) below:


[0011]



In the general formula (I), m denotes an integer of 1 to 30.

According to the method for producing an olefin polymer of the invention, the organoaluminum compound (C) is preferably represented by general formula (II) below:

10 [0012]



In the formula, R^a and R^b may be the same as or different from each other and each denote a hydrocarbon group having 1 to 20 and preferably 1 to 4 carbon atoms; m, n and p satisfy
15 therlations; $0 < m \leq 3$; $0 \leq n < 3$, $0 \leq p < 3$, and $m + n + p = 3$.

[0013]

According to the method for producing an olefin polymer of the invention, the addition ratio (molar ratio), (C)/(B),
20 of the organoaluminum compound (C) to the aliphatic amide (B) is preferably 0.01 to 4.0, more preferably 0.01 to 3.5, yet more preferably 0.01 to 3.2, still more preferably 0.01 to 3.0, yet still preferably 0.2 to 2.8, and most preferably 0.3 to 2.6.

25 [0014]

According to the method for producing an olefin polymer of the invention,

the solid catalyst component for olefin polymerization (A) is preferably composed of

5 (A-1) a compound of a transition metal selected from groups 3 to 12 in the periodic table,

(A-2) at least one compound selected from

(a) an organometal compound,

(b) an organoaluminoxy compound, and

10 (c) a compound that forms an ion pair by reacting with (A-1), and

(A-3) a particulate carrier.

[0015]

According to the method for producing an olefin polymer
15 of the present invention, the (co)polymerization is preferably conducted in a suspension, a solution, or a gas phase.

Advantageous Effects of Invention

[0016]

20 The present invention can provide a method for producing an olefin polymer, with which an olefin polymer having good particle properties can be produced in high polymerization activity, contamination inside a polymerization vessel such as on a vessel wall or an impeller can be effectively
25 prevented, heat spots can be suppressed during polymerization,

sheeting and generation of polymer masses can be prevented, and stable long-term olefin polymerization operation is achieved.

[0017]

5 In other words, according to the present invention, (co)polymerization of olefins is conducted in a polymerization vessel containing both the aliphatic amide (B) and the organoaluminum compound (C) so that the decrease in polymerization activity of olefins is suppressed, the
10 flowability inside the polymerization vessel is effectively ensured without decreasing the production rate of polymers, and polymers are prevented from adhering to the vessel wall or the impeller. Thus, long-term stable operation is possible with high activity, and an olefin polymer having
15 good particle properties can be produced.

[0018]

 The olefin polymer production method of the present invention is applicable to a wide range of processes, such as suspension polymerization, solution polymerization, or gas-
20 phase polymerization.

Brief Description of Drawings

[0019]

 [Fig. 1] Fig. 1 shows a scheme of a process of a polymerization method (1) for evaluating the condition of a
25 polymerization vessel inner wall during (co)polymerization in

Examples and Comparative Examples.

[Fig. 2] Fig. 2 shows a scheme of a process of a polymerization method (2) for evaluating polymerization activity in Examples and Comparative Examples.

5 [Fig. 3] Fig. 3 shows a scheme of a polymerization process of Example 13 for evaluating the operability of gas-phase polymerization using a fluidized-bed gas-phase polymerization reactor.

[Fig. 4] Fig. 4 include images that show the extent of
10 polymer adherence to the autoclave inner wall at respective evaluation ratings. Fig. 4-a is an image showing a rating C (Bad), Fig. 4-b is an image showing a rating B (Good), and Fig. 4-c is an image showing a rating A (Excellent).

Description of Embodiments

15 [0020]

The present invention will now be described in specific detail.

[0021]

In the present invention, the word "(co)polymerization"
20 is used to include both polymerization and copolymerization in its meaning. In the present invention, the word "polymer" may be used to represent not only a homopolymer but also a copolymer.

[0022]

25 In the olefin polymer production method of the present

invention, (co)polymerization of olefins is conducted in the presence of (A) a solid catalyst component for olefin polymerization, (B) an aliphatic amide, and (C) an organoaluminum compound. These components are individually
5 described first.

[0023]

(A) Solid catalyst component for olefin polymerization

Examples of the solid catalyst component for olefin polymerization (A) include solid catalyst components that
10 contain compounds of transition metals selected from group 3 to group 12 elements in the periodic table. Specific examples thereof include a carrier-supported-type transition metal complex-based catalyst component in which a compound of group 4 to 6 transition metal in the periodic table is
15 supported on a particle-shaped carrier, a solid titanium-based catalyst component composed of a solid titanium catalyst component and an organoaluminum compound, and a so-called Phillips catalyst component containing a chromium compound that can be oxidized into chromium trioxide, the
20 chromium compound being supported on an inorganic oxide solid such as silica.

[0024]

Among these, a carrier-supported-type metallocene-based catalyst component that belongs to a carrier-supported-type
25 transition metal complex-based catalyst component is

preferred. In particular, a carrier-supported-type metallocene catalyst component that contains (A-1) a compound of group 4 transition metal in the periodic table having a cyclopentadienyl skeleton, (A-2) at least one compound
5 selected from (a) an organic metal compound, (b) an organoaluminoxy compound, and (c) a compound that forms an ion pair by reacting with the compound of group 4 transition metal in the periodic table having a cyclopentadienyl skeleton, and (A-3) a particulate carrier is preferable. A
10 carrier-supported-type metallocene catalyst component that contains (A-1) a compound of group 4 transition metal in the periodic table having a cyclopentadienyl skeleton, (A-2) an organoaluminoxy compound, and (A-3) a particulate carrier is more preferable.

15 • Carrier-supported-type transition metal complex-based catalyst component

Next, a carrier-supported-type transition metal complex-based catalyst component favorable for use as the solid catalyst component for olefin polymerization (A) in the
20 present invention is described.

[0025]

The carrier-supported-type transition metal complex-based catalyst component used as the component (A) of the present invention is preferably composed of
25 (A-1) a compound of group 4-6 transition metal in the

periodic table,

(A-2) at least one compound selected from

(a) an organometal compound,

(b) an organoaluminoxy compound, and

5 (c) a compound that forms an ion pair by reacting
with (A-1), and

(A-3) a particulate carrier.

Individual components (A-1) to (A-3) are described below.

[0026]

10 [(A-1) Compound of group 4-6 transition metal in the
periodic table]

The transition metal compound used in the present
invention is not particularly limited and may be any known
compound of group 4-6 transition metal in the periodic table
15 having an ability to polymerize olefins. Examples thereof
include a halogenated, alkylated, or alkoxyated compound of
group 4-6 transition metal in the periodic table and a cross-
linking or non-cross-linking metallocene compound of a group
4-6 transition metal in the periodic table.

20 [0027]

A halogenated, alkylated, or alkoxyated compound of
group 4 transition metal in the periodic table or a cross-
linking or non-cross-linking metallocene compound of a group
4 transition metal in the periodic table is more preferred.
25 Examples of the transition metal compound (A) include

halogenated transition metals, alkylated transition metals,
and alkoxyated transition metals. Specific examples thereof
include titanium tetrachloride, dimethyltitanium dichloride,
tetrabenzyltitanium, tetrabenzylzirconium, and
5 tetrabutoxytitanium.

[0028]

Among the transition metal compounds listed as examples
in the description above, a cross-linking or non-cross-
linking metallocene compound is particularly preferable from
10 the viewpoint of polymerization activity, etc. The cross-
linking or non-cross-linking metallocene compound is a
compound of group 4 transition metal in the periodic table
having a cyclopentadienyl skeleton and examples thereof
include compounds represented by general formula (III) below:

15 [0029]

ML_x (III)

In general formula (III), M denotes a group 4 transition
metal in the periodic table, e.g., zirconium, titanium or
hafnium.

20 [0030]

L is a ligand (group) that coordinates to the transition
metal. At least one L is a ligand having a cyclopentadienyl
skeleton and L other than the ligand having a
cyclopentadienyl skeleton is a C1-C12 hydrocarbon group, an
25 alkoxy group, an aryloxy group, a halogen atom, a

trialkylsilyl group, $-\text{SO}_3\text{R}$ (where R is a C1-C8 hydrocarbon group which may have a substituent such as a halogen), or a hydrogen atom.

[0031]

- 5 In the formula, x denotes a valence of the transition metal, i.e., the number of L.

[0032]

Examples of the ligand having a cyclopentadienyl skeleton include a cyclopentadienyl group; alkyl-substituted
10 cyclopentadienyl groups such as a methylcyclopentadienyl group, a dimethylcyclopentadienyl group, a trimethylcyclopentadienyl group, a tetramethylcyclopentadienyl group, a pentamethylcyclopentadienyl group, an ethylcyclopentadienyl
15 group, a methylethylcyclopentadienyl group, a propylcyclopentadienyl group, a methylpropylcyclopentadienyl group, a butylcyclopentadienyl group, a methylbutylcyclopentadienyl group, and a hexylcyclopentadienyl group; an indenyl group; 4,5,6,7-tetrahydroindenyl group; and a fluorenyl group. These groups
20 may be substituted with a halogen atom, a trialkylsilyl group, etc.

[0033]

Among these ligands that coordinate to the transition
25 metal, an alkyl-substituted cyclopentadienyl group is

particularly preferable. When a compound represented by general formula (III) above contains two or more groups having a cyclopentadienyl skeleton, two of the groups having a cyclopentadienyl skeleton may be bonded with each other
5 through an alkylene group such as ethylene and propylene; an alkylidene group such as isopropylidene and diphenylmethylenes; a silylene group; or a substituted silylene group such as a dimethylsilylene group, a diphenylsilylene group, and a methylphenylsilylene group.
10 The two or more groups having a cyclopentadienyl skeleton are preferably the same.

[0034]

Examples of the ligand other than the ligand having a cyclopentadienyl skeleton are as follows: C1-C12 hydrocarbon
15 groups such as alkyl groups, e.g., a methyl group, an ethyl group, a propyl group, an isopropyl group, a butyl group, and a pentyl group; cycloalkyl groups such as a cyclopentyl group and a cyclohexyl group; aryl groups such as a phenyl group and a tolyl group; and aralkyl groups such as a benzyl group
20 and a neophyl group.

[0035]

Examples of the alkoxy group include a methoxy group, an ethoxy group, and a butoxy group. Examples of the aryloxy group include a phenoxy group.


25 [0036]

Examples of the halogen include fluorine, chlorine, bromine, and iodine. Examples of the ligand represented by $-\text{SO}_3\text{R}$ include a p-toluenesulfonate group, a methanesulfonate group, and a trifluoromethanesulfonate group.

5 [0037]

The compound represented by the general formula (III) above is more particularly a compound represented by a general formula (III') below when the valence of the transition metal is 4, for example.

10 [0038]



(In the general formula (III'), M denotes zirconium, titanium or hafnium; R^1 denotes a group having a cyclopentadienyl skeleton; R^2 , R^3 , and R^4 may be the same or
15 different and each denote a group having a cyclopentadienyl skeleton, an alkyl group, a cycloalkyl group, an aryl group, an aralkyl group, an alkoxy group, an aryloxy group, a halogen atom, a trialkylsilyl group, $-\text{SO}_3\text{R}$, or a hydrogen atom.)

20 [0039]

In the invention, (A-1) is preferably a transition metal compound represented by the general formula (III') in which one of R^2 , R^3 , and R^4 denotes a group having a cyclopentadienyl skeleton, e.g., a transition metal compound
25 in which R^1 and R^2 each denote a group having a

cyclopentadienyl skeleton. These groups having cyclopentadienyl skeletons may be bonded with each other through an alkylene group, a substituted alkylene group, an alkylidene group, a silylene group, a substituted silylene group, or the like. R³ and R⁴ each denote an alkyl group, a cycloalkyl group, an aryl group, an aralkyl group, an alkoxy group, an aryloxy group, a halogen atom, a trialkylsilyl group, -SO₃R, or a hydrogen atom.

[0040]

- 10 Specific examples of the transition metal compounds with M denoting zirconium are as follows: bis(indenyl)zirconium dichloride, bis(indenyl)zirconium dibromide, bis(indenyl)zirconium bis(p-toluenesulfonate), bis(4,5,6,7-tetrahydroindenyl)zirconium dichloride,
- 15 bis(fluorenyl)zirconium dichloride, ethylenebis(indenyl)zirconium dichloride, ethylenebis(indenyl)zirconium dibromide, ethylenebis(indenyl)dimethylzirconium, ethylenebis(indenyl)diphenylzirconium,
- 20 ethylenebis(indenyl)methylzirconium monochloride, ethylenebis(indenyl)zirconium bis(methanesulfonate), ethylenebis(indenyl)zirconium bis(p-toluenesulfonate), ethylenebis(indenyl)zirconium bis(trifluoromethanesulfonate), ethylenebis(4,5,6,7-tetrahydroindenyl)zirconium dichloride,
- 25 isopropylidene(cyclopentadienyl-fluorenyl)zirconium

dichloride, isopropylidene(cyclopentadienyl-
methylcyclopentadienyl)zirconium dichloride,
dimethylsilylenebis(cyclopentadienyl)zirconium dichloride,
dimethylsilylenebis(methylcyclopentadienyl) zirconium
5 dichloride,
dimethylsilylenebis(dimethylcyclopentadienyl) zirconium
dichloride,
dimethylsilylenebis(trimethylcyclopentadienyl) zirconium
dichloride, dimethylsilylenebis(indenyl)zirconium dichloride,
10 dimethylsilylenebis(indenyl) zirconium
bis(trifluoromethanesulfonate), rac-dimethylsilylenebis{1-(2-
methyl-4,5-acenaphthocyclopentadienyl)}zirconium dichloride,
rac-dimethylsilylenebis{1-(2-methyl-4,5-
benzoindenyl)}zirconium dichloride, rac-
15 dimethylsilylenebis{1-(2-methyl-4-isopropyl-7-
methylindenyl)}zirconium dichloride, rac-
dimethylsilylenebis{1-(2-methyl-4-phenylindenyl)}zirconium
dichloride, rac-dimethylsilylenebis{1-(2-
methylindenyl)}zirconium dichloride,
20 dimethylsilylenebis(4,5,6,7-tetrahydroindenyl)zirconium
dichloride, dimethylsilylene(cyclopentadienyl-
fluorenyl)zirconium dichloride,
diphenylsilylenebis(indenyl)zirconium dichloride,
methylphenylsilylenebis(indenyl)zirconium dichloride,
25 bis(cyclopentadienyl)zirconium dichloride,

bis(cyclopentadienyl)zirconium dibromide,
bis(cyclopentadienyl)methylzirconium monochloride,
bis(cyclopentadienyl)ethylzirconium monochloride,
bis(cyclopentadienyl)cyclohexylzirconium monochloride,
5 bis(cyclopentadienyl)phenylzirconium monochloride,
bis(cyclopentadienyl)benzylzirconium monochloride,
bis(cyclopentadienyl)zirconium monochloride monohydride,
bis(cyclopentadienyl)methylzirconium monohydride,
bis(cyclopentadienyl)dimethylzirconium,
10 bis(cyclopentadienyl)diphenylzirconium,
bis(cyclopentadienyl)dibenzylzirconium,
bis(cyclopentadienyl)zirconium methoxychloride,
bis(cyclopentadienyl)zirconium ethoxychloride,
bis(cyclopentadienyl)zirconium bis(methanesulfonate),
15 bis(cyclopentadienyl)zirconium bis(p-toluenesulfonate),
bis(cyclopentadienyl)zirconium bis(trifluoromethanesulfonate),
bis(methylcyclopentadienyl)zirconium dichloride,
bis(dimethylcyclopentadienyl)zirconium dichloride,
bis(dimethylcyclopentadienyl)zirconium ethoxychloride,
20 bis(dimethylcyclopentadienyl)zirconium
bis(trifluoromethanesulfonate),
bis(ethylcyclopentadienyl)zirconium dichloride,
bis(methylethylcyclopentadienyl)zirconium dichloride,
bis(propylcyclopentadienyl)zirconium dichloride,
25 bis(methylpropylcyclopentadienyl)zirconium dichloride,

bis(butylcyclopentadienyl)zirconium dichloride,
bis(methylbutylcyclopentadienyl)zirconium dichloride,
bis(methylbutylcyclopentadienyl)zirconium
bis(methanesulfonate),
5 bis(trimethylcyclopentadienyl)zirconium dichloride,
bis(tetramethylcyclopentadienyl)zirconium dichloride,
bis(pentamethylcyclopentadienyl)zirconium dichloride,
bis(hexylcyclopentadienyl)zirconium dichloride, and
bis(trimethylsilylcyclopentadienyl)zirconium dichloride.

10 [0041]

In the examples listed above, the disubstituted
cyclopentadienyl ring includes a 1,2-substituted
cyclopentadienyl and a 1,3-substituted cyclopentadienyl and
the trisubstituted cyclopentadienyl ring includes 1,2,3- and
15 1,2,4-substituted cyclopentadienyl. Alkyl groups such as
propyl and butyl include isomers such as n-, i-, sec-, and
tert-isomers.

[0042]

In the present invention, a transition metal compound in
20 which zirconium metal in the above-described zirconium
compound is replaced by a titanium metal or a hafnium metal
may be used. In addition to the titanium and hafnium
compounds having similar steric structures and bromides and
iodides thereof, transition metal compounds described in
25 Japanese Unexamined Patent Application Publication Nos. H3-


9913, H2-131488, H3-21607, H3-106907, H3-188092, H4-69394,
and H4-300887 and WO01/27124A1 may also be used.

[0043]

The transition metal compound may be a transition metal
5 compound represented by a general formula (IV) below
described in Japanese Unexamined Patent Application
Publication No. H11-315109.

[0044]

[Chem. 1]

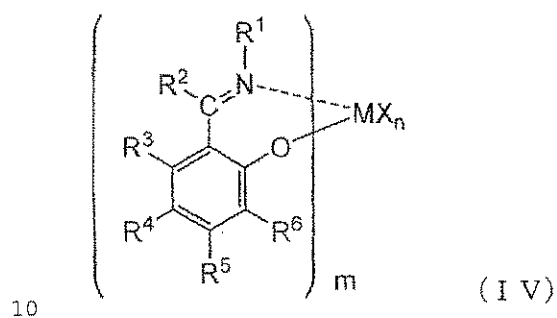

[0045]

In the formula, M denotes a group 4-6 transition metal
atom in the periodic table,

m denotes an integer of 1 to 6, and

15 R^1 to R^6 may be the same or different and each denote a
hydrogen atom, a halogen atom, a hydrocarbon group, a
heterocyclic compound residue, an oxygen-containing group, a
nitrogen-containing group, a boron-containing group, a
sulfur-containing group, a phosphorus-containing group, a
20 silicon-containing group, a germanium-containing group, or a

tin-containing group. Two or more of R^1 to R^6 may be bonded with each other to form a ring.

When m is 2 or more, two of the groups denoted by R^1 to R^6 may be bonded with each other (however, R^1 is never bonded
5 to R^1).

The subscript n is a number that satisfies the valence of M .

X denotes a hydrogen atom, a halogen atom, a hydrocarbon group, an oxygen-containing group, a sulfur-containing group,
10 a nitrogen-containing group, a boron-containing group, an aluminum-containing group, a phosphorus-containing group, a halogen-containing group, a heterocyclic compound residue, a silicon-containing group, a germanium-containing group, or a tin-containing group. When n is 2 or more, the groups
15 denoted by X may be the same or different and may be bonded with each other to form a ring.

[Component (A-2)]

The component (A-2) that constitutes the carrier-supported-type transition metal complex-based catalyst
20 component is at least one compound selected from (a) an organic metal compound, (b) an organoaluminioxy compound, and (c) a compound that forms an ion pair by reacting with (A-1).


(a) Organometal compound

Organometal compounds that contains metal elements of
25 group 1, 2, 12, and 13 in the periodic table represented by

general formulae (V), (VI), and (VII) below are used as the (a) organometal compound used in the present invention.

[0046]


An organoaluminum compound represented by



In the formula, R^a and R^b may be the same or different and each denote a hydrocarbon group having 1 to 15 and preferably 1 to 4 carbon atoms, X denotes a halogen atom, m, n, p and q satisfy the relations; $0 < m \leq 3$, $0 \leq n < 3$, $0 \leq p < 3$, $0 \leq q < 3$, and $m + n + p + q = 3$. Examples of such a compound include trimethylaluminum, triethylaluminum, triisobutylaluminum, and diisobutylaluminum hydride.

[0047]

An alkylated complex of aluminum and a group 1 metal in the periodic table represented by a general formula



In the formula, M^2 denotes Li, Na, or K and R^a denotes a hydrocarbon group having 1 to 15 carbon atoms and preferably 1 to 4 carbon atoms. Examples of such a compound include $LiAl(C_2H_5)_4$ and $LiAl(C_7H_{15})_4$.

[0048]

A dialkyl compound of a group 2 or 12 metal in the periodic table represented by general formula



25 In the formula, R^a and R^b may be the same or different and

each denote a hydrocarbon group having 1 to 15 carbon atoms and preferably 1 to 4 carbon atoms, and M^3 denotes Mg, Zn, or Cd.

[0049]


5 Among the organometal compounds described above, organoaluminum compounds are preferred. The organic metal compounds may be used alone or in combination of two or more.

(b) Organoaluminoxy compound

A known aluminoxane may be used as the organoaluminoxy
10 compound. Specific examples thereof include compounds represented by general formulae (VIII) and/or (IX).


[0050]

[Chem. 2]



15 [0051]

[Chem. 3]

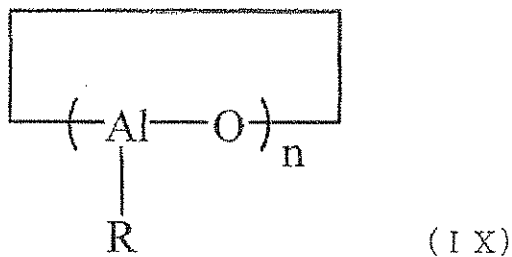

[0052]

In general formulae (VIII) and (IX), R denotes a hydrocarbon group having 1 to 10 carbon atoms and n denotes an integer of 2 or more.

Methylaluminoxanes represented by general formulae (VIII) and (IX) with R denoting a methyl group and n denoting 3 or more and preferably 10 or more are preferred as the organoaluminosy compound. Slight amount of organoaluminum compounds contained in these aluminoxanes may cause no problem. An organoaluminosy compound insoluble in benzene, which is, for example, described in Japanese Unexamined Patent Application Publication No. 2-78687, may also be used as the organoaluminosy compound. Organoaluminosy compounds described in Japanese Unexamined Patent Application Publication No. 2-167305, and aluminoxanes having two or more types of alkyl groups and the like described in Japanese Unexamined Patent Application Publication Nos. 2-24701 and 3-103407 are also suited for the use.

[0053]

Such known aluminoxanes can be produced by the methods (1) to (3) below, for example, and are usually obtained as solutions in hydrocarbon solvents.

(1) A method that includes adding an organoaluminum compound, such as trialkylaluminum, to a hydrocarbon medium suspension of a compound containing adsorbed water or a salt containing crystal water, such as magnesium chloride hydrates, copper

sulfate hydrates, aluminum sulfate hydrates, nickel sulfate hydrates, and cerous chloride hydrates, and allowing the organoaluminum compound to react with adsorbed water or crystal water.

5 (2) A method that includes causing water, ice, or steam to directly act on an organoaluminum compound, such as trialkylaluminum, in a medium such as benzene, toluene, ethyl ether, and tetrahydrofuran.

(3) A method that includes causing an organic tin oxide,
10 such as dimethyltin oxide and dibutyltin oxide, to react with an organoaluminum compound such as trialkylaluminum in a medium such as decane, benzene, and toluene.

[0054]

The aluminoxanes may contain a slight amount of
15 organometal components. Solutions of aluminoxanes that have been recovered may be subjected to distillation to remove the solvents or unreacted organoaluminum compounds and then the products may be used again by dissolving in solvents.


[0055]

20 Specific examples of the organoaluminum compounds used in preparing aluminoxanes include trialkylaluminum such as trimethylaluminum, triethylaluminum, tripropylaluminum, triisopropylaluminum, tri-n-butylaluminum, triisobutylaluminum, tri-sec-butylaluminum, tri-tert-
25 butylaluminum, tripentylaluminum, trihexylaluminum,

trioctylaluminum, and tridecylaluminum; tricycloalkylaluminum such as tricyclohexylaluminum and tricyclooctylaluminum; dialkylaluminum halides such as dimethylaluminum chloride, diethylaluminum chloride, diethylaluminum bromide, and
5 diisobutylaluminum chloride; dialkylaluminum hydrides such as diethylaluminum hydride and diisobutylaluminum hydride; dialkylaluminum alkoxides such as dimethylaluminum methoxide and diethylaluminum ethoxide; and dialkylaluminum aryloxides such as diethylaluminum phenoxide.

10 [0056]

Among these, trialkylaluminum and tricycloalkylaluminum are particularly preferred. An isoprenylaluminum represented by a general formula (X) below may be used as the organoaluminum compound:



In the general formula (X), x, y, and z each denote a positive number and $z \geq 2x$.

[0057]

The above-described organoaluminum compounds may be used
20 alone or in combination of two or more. Examples of the solvent used in preparing aluminoxanes include aromatic hydrocarbons such as benzene, toluene, xylene, cumene, and cymene, aliphatic hydrocarbons such as pentane, hexane, heptane, octane, decane, dodecane, hexadecane, and octadecane,
25 alicyclic hydrocarbons such as cyclopentane, cyclohexane,

cyclooctane, and methylcyclopentane, petroleum fractions such as gasoline, kerosene, and light gas oil, and halides of the above-described aromatic, aliphatic, and alicyclic hydrocarbons and more particularly chlorides and bromides
5 thereof. Ethers such as ethyl ether and tetrahydrofuran may also be used. Among these solvents, aromatic hydrocarbons are particularly preferable.

[0058]

The organoaluminoxy compounds such as aluminoxanes and
10 organoaluminoxy compounds described above are used alone or in combination of two or more.

(c) Compound that forms an ion pair by reacting with (A-1)

Examples of the compound that forms an ion pair by reacting with the group 4-6 transition metal compound (A-1)
15 according to the present invention (hereinafter this compound is referred to as "ionized ionic compound") include Lewis acids, ionic compounds, borane compounds, and carborane compounds described in Japanese Unexamined Patent Application Publication Nos. H1-501950, H1-502036, H3-179005, H3-179006,
20 H3-207703, and H3-207704 and USP No. 5321106. Examples of the compound further include heteropoly compounds and isopoly compounds. Such ionized ionic compounds may be used alone or in combination of two or more.

[0059]

25 Among the organometal compound (a), the organoaluminoxy

compound (b), and the compound that forms an ion pair by reacting with (A-1) (C) from which the compound (A-2) is selected, the organoaluminoxy compound (b) is particularly preferable in the present invention.

5 [0060]

[(A-3) Particulate carrier]

Specific examples of the particulate carrier (A-3) include inorganic metal oxide carriers such as SiO_2 , Al_2O_3 , MgO , ZrO_2 , TiO_2 , B_2O_3 , CaO , ZnO , BaO , ThO_2 , and mixtures
10 thereof, e.g., $\text{SiO}_2\text{-MgO}$, $\text{SiO}_2\text{-Al}_2\text{O}_3$, $\text{SiO}_2\text{-TiO}_2$, $\text{SiO}_2\text{-V}_2\text{O}_5$, $\text{SiO}_2\text{-Cr}_2\text{O}_3$, and $\text{SiO}_2\text{-TiO}_2\text{-MgO}$, inorganic chlorides carriers such as MgCl_2 , MgBr_2 , MnCl_2 , and MnBr_2 , and organic carriers such as polyethylene, polypropylene, poly-1-butene, poly-4-methyl-1-pentene, and styrene-divinylbenzene copolymers. Clays, clay
15 minerals which are components of clays, and ion exchanging layered compounds may be used as inorganic carriers.

[0061]

The inorganic compound carriers preferably have an average particle diameter in the range of 1 to 300 μm and
20 preferably in the range of 3 to 200 μm . Such carriers are fired at 100°C to 1000°C and preferably 150°C to 700°C according to needs and used.

[0062]

The inorganic chlorides may be used as they are or after
25 being pulverized in a ball mill or a vibrating mill. An

inorganic chloride may be dissolved in a solvent such as alcohol and then precipitated into fine particles with a precipitating agent.

[0063]

5 A clay used in the present invention usually contains a clay mineral as a main component. An ion exchanging layered compound used in the present invention is a compound that has a crystal structure including layers that are constituted by ion bonding and stacked in parallel with each other with weak
10 binding force and that contain ions that are exchangeable. Most of clay minerals are ion exchanging layered compounds. The clay, clay mineral, and ion exchanging layered compound that can be used may be natural or synthetic products. Examples of the clay, clay mineral, and ion exchanging
15 layered compound include clays, clay minerals, and ion crystal compounds having layered crystal structures such as a hexagonal closest packing structure, an antimony structure, a CdCl_2 structure, and a CdI_2 structure. Examples of such clays and clay minerals include kaolin, bentonite, kibushi clay, gairome clay, allophane, hisingerite, pyrophyllite, micas,
20 montmorillonites, vermiculite, chlorites, palygorskite, kaolinite, naxhlite, dickite, and halloysite. Examples of the ion exchanging layered compound include crystalline acid salts of multivalent metals such as $\alpha\text{-Zr}(\text{HAsO}_4)_2 \cdot \text{H}_2\text{O}$, $\alpha\text{-Zr}(\text{HPO}_4)_2$, $\alpha\text{-Zr}(\text{KPO}_4)_2 \cdot 3\text{H}_2\text{O}$, $\alpha\text{-Ti}(\text{HPO}_4)_2$, $\alpha\text{-Ti}(\text{HAsO}_4)_2 \cdot \text{H}_2\text{O}$, $\alpha\text{-$
25

$\text{Sn}(\text{HPO}_4)_2 \cdot \text{H}_2\text{O}$, $\gamma\text{-Zr}(\text{HPO}_4)_2$, $\gamma\text{-Ti}(\text{HPO}_4)_2$, and $\gamma\text{-Ti}(\text{NH}_4\text{PO}_4)_2 \cdot \text{H}_2\text{O}$.

The clay and clay mineral used in the present invention are preferably chemically treated. Examples of chemical treatment include, e.g., surface treatment for removing
5 impurities adhered to a surface and treatment that affects the crystal structure of the clay and the like. Specific examples of the chemical treatment include acid treatment, alkali treatment, salt treatment, and organic substance treatment.

10 [0064]

The ion exchanging layered compound used in the present invention may be a layered compound having a increased layer-to-layer distance by utilizing the ion exchanging property, i.e., exchanging the interlayer exchanging ions with other
15 bulky ions. Such bulky ions function as pillars that support the layered structure and are usually called "pillars". Introduction of another substance between layers of the layered compound is called "intercalation". Examples of the guest compound to be intercalated include cationic inorganic
20 compounds such as TiCl_4 and ZrCl_4 , metal alkoxides such as $\text{Ti}(\text{OR})_4$, $\text{Zr}(\text{OR})_4$, $\text{PO}(\text{OR})_3$, and $\text{B}(\text{OR})_3$ (R denotes a hydrocarbon group or the like), and metal hydroxide ions such as $[\text{Al}_{13}\text{O}_4(\text{OH})_{24}]^{7+}$, $[\text{Zr}_4(\text{OH})_{14}]^{2+}$, and $[\text{Fe}_3\text{O}(\text{OCOCH}_3)_6]^+$. These compounds are used alone or in combination of two or more.
25 Intercalation of these compounds may be conducted in the

presence of a polymer obtained by hydrolysis of a metal alkoxide such as Si(OR)_4 , Al(OR)_3 , Ge(OR)_4 (R denotes a hydrocarbon group or the like), a colloidal inorganic compound such as SiO_2 , or the like. The pillar may be an
5 oxide produced by intercalating the metal hydroxide ions between layers and performing thermal dehydration. Of these, clays and clay minerals are preferable. Montmorillonite, vermiculite, pectolite, taeniolite, and synthetic mica are particularly preferable.

10 [0065]

Examples of the organic compound used in the organic carrier include granular or fine particle solids having a grain diameter in the range of 1 to 300 μm . As mentioned already, specific examples thereof include (co)polymers
15 produced from α -olefins having 2 to 14 carbon atoms as main components, such as ethylene, propylene, 1-butene, and 4-methyl-1-pentene, (co)polymers produced from vinyl cyclohexane and/or styrene as a main component, and modified products thereof.

20 [0066]

[Carrier-supported-type metallocene-based catalyst component]

A carrier-supported-type metallocene-based catalyst component, which is one of the materials preferred for use as a solid catalyst component for olefin polymerization (A) used
25 in the present invention will now be described.

[0067]

A carrier-supported-type metallocene-based catalyst component is a catalyst component in which a metallocene-based transition metal compound is supported on a carrier.
5 Preferably, the catalyst component contains the group 4 transition metal compound having a cyclopentadienyl skeleton (A-1) and the organoaluminoxy compound (b) (A-2) which are supported on the particulate carrier (A-3).

[0068]

10 Such a carrier-supported-type metallocene-based catalyst component can be prepared by mixing and bringing into contact a compound of the group 4 transition metal having a cyclopentadienyl skeleton (A-1), an organoaluminoxy compound (b) (A-2), and a particulate carrier (A-3). The order in
15 which the respective components are brought into contact with one another is selected as desired.

[0069]

Specific examples of inert hydrocarbon solvents used in preparation of the carrier-supported-type metallocene-based
20 catalyst component include aliphatic hydrocarbons such as propane, butane, pentane, hexane, heptane, octane, decane, dodecane, and kerosene; alicyclic hydrocarbons such as cyclopentane, cyclohexane, and methylcyclopentane; aromatic hydrocarbons such as benzene, toluene, and xylene;
25 halogenated hydrocarbons such as ethylene chloride,

chlorobenzene, and dichloromethane; and mixtures thereof.

[0070]

In preparing a carrier-supported-type metallocene-based catalyst component, the amount of the transition metal compound (A-1) used on a transition metal atom basis is usually 0.001 to 1.0 mmol and preferably 0.005 to 0.5 mmol and the amount of the organoaluminioxy compound (b) (A-2) used on an aluminum atom basis is usually 0.1 to 100 mmol and preferably 0.5 to 20 mmol per gram of the particulate carrier (A-3). When the organoaluminum compound (C) is used, it is used in an amount of usually 0.001 to 1000 mmol and preferably 2 to 500 mmol per gram of the particulate carrier (A-3).

[0071]

The temperature at which the individual components are mixed and contacted one another is usually -50°C to 150°C and preferably -20°C to 120°C, and the period of contact is 1 to 1000 minutes and preferably 5 to 600 minutes.

[0072]

In the carrier-supported-type metallocene-based catalyst component obtained as such, about 5×10^{-6} to 10^{-3} mol and preferably 10^{-5} to 3×10^{-4} mol of the transition metal compound (A-1) on a transition metal atom basis is supported and about 10^{-3} to 10^{-1} mol and preferably 2×10^{-3} to 5×10^{-2} mol of the organoaluminioxy compound (b) (A-2) on an aluminum

atom basis is supported per gram of the fine particulate support (A-3).

[0073]

The solid catalyst component for olefin polymerization
5 (A) used in the present invention may be a prepolymerized catalyst component in which olefins are preliminarily polymerized. A prepolymerized catalyst is composed of the catalyst for olefin polymerization (A) and, if needed, an olefin polymer produced by prepolymerization (D).

10 [0074]

The prepolymerized catalyst may include the transition metal compound (A-1), the organoaluminoxy compound (b) (A-2), and the particulate carrier (A-3). Olefin polymer produced by prepolymerization (D) may be included, if needed.

15 [0075]

An example of a method for preparing such a prepolymerized catalyst is a method that includes preliminarily polymerizing a small amount of an olefin with a solid catalyst component produced by mixing and bringing into
20 contact a transition metal compound (A-1), an organoaluminoxy compound (b) (A-2), and a particulate carrier (A-3) in an inert hydrocarbon solvent or an olefin medium. Examples of the inert hydrocarbon solvent used in preparing the prepolymerized catalyst are the same as those of the inert
25 hydrocarbon solvent used in preparing the carrier-supported-

type metallocene-based catalyst component described above.

[0076]

The olefin used in prepolymerization contains 100 to 0 mol% of ethylene, 0 to 49 mol% of propylene, and 0 to 100 mol% of an olefin having 4 or more carbon atoms, preferably 100 to 0 mol% of ethylene, 0 to 20 mol% of propylene, and 0 to 100 mol% of an olefin having 4 or more carbon atoms, more preferably 100 to 20 mol% of ethylene, 0 to 20 mol% of propylene, and 0 to 80 mol% of an olefin having 4 or more carbon atoms, and particularly preferably 100 to 20 mol% of ethylene and 0 to 80 mol% of an olefin having 4 or more carbon atoms.

[0077]

Examples of the olefin having 4 or more carbon atoms include α -olefins having 4 to 20 carbon atoms such as 1-butene, 1-pentene, 1-hexene, 4-methyl-1-pentene, 1-octene, 1-decene, 1-dodecene, 1-tetradecene, 1-hexadecene, 1-octadecene, and 1-eicosene.

[0078]

Furthermore, cyclopentene, cycloheptene, norbornene, 5-methyl-2-norbornene, tetracyclododecene, 2-methyl-1,4,5,8-dimethano-1,2,3,4,4a,5,8,8a-octahydronaphthalene, styrene, vinylcyclohexane, and dienes may also be used.

[0079]

In preparing the prepolymerized catalyst, usually 0.001

to 1.0 mmol and preferably 0.005 to 0.5 mmol of the transition metal compound (A-1) on a transition metal atom basis is used and usually 0.1 to 100 mmol and preferably 0.5 to 20 mmol of the organoaluminoxyl compound (b) (A-2) on an aluminum atom basis is used per gram of the particulate carrier (A-3).

[0080]

In the prepolymerized catalyst obtained as such, about 5×10^{-6} to 10^{-3} mol and preferably 10^{-5} to 3×10^{-4} mol of the transition metal compound (A-1) on a transition metal atom basis is supported and about 10^{-3} to 10^{-1} mol and preferably 2×10^{-3} to 5×10^{-2} mol of the organoaluminoxyl compound (b) (A-2) on an aluminum atom basis is supported, and about 0.1 to 500 g, preferably 0.3 to 300 g, and more preferably 1 to 100 g of the olefin polymer (D) produced by prepolymerization is supported per gram of the particulate carrier (A-3).

[0081]

The solid catalyst component for olefin polymerization (A) used in the present invention may contain components useful for polymerization other than the components described above. Such a catalyst for olefin polymerization used in the present invention can polymerize the olefin in a high polymerization activity.

[0082]

If needed, the carrier-supported-type metallocene-based


catalyst component may contain (E) an organoaluminum compound or a nonionic surfactant which is added during synthesis of the catalyst or the prepolymerization.

(E) Organoaluminum compound

5 Examples of the organoaluminum compound (E) that can be used in the present invention as needed include compounds represented by general formulae (XI), (XII), and (XIII) below.

[0083]

An organoaluminum compound represented by



In the formula, R^a and R^b may be the same or different and each denote a hydrocarbon group having 1 to 15 and preferably 1 to 4 carbon atoms, X denotes a halogen atom, m, n, p, and q satisfy the relations; $0 < m \leq 3$, $0 \leq n < 3$, $0 \leq p < 3$, $0 \leq q$
15 < 3 , and $m + n + p + q = 3$.


[0084]

Examples thereof include tri-n-alkyl aluminum such as trimethylaluminum, triethylaluminum, tri-n-butylaluminum, tripropylaluminum, tripentylaluminum, trihexylaluminum,
20 trioctylaluminum, and tridecylaluminum; tri-branched alkyl aluminum such as triisopropylaluminum, triisobutylaluminum, tri-sec-butylaluminum, tri-tert-butylaluminum, tri-2-methylbutylaluminum, tri-3-methylbutylaluminum, tri-2-methylpentylaluminum, tri-3-methylpentylaluminum, tri-4-
25 methylpentylaluminum, tri-2-methylhexylaluminum, tri-3-

methylhexylaluminum, and tri-2-ethylhexylaluminum;
tricycloalkylaluminum such as tricyclohexylaluminum and
tricyclooctylaluminum; triarylaluminum such as
triphenylaluminum and tritolylaluminum; and dialkylaluminum
5 hydrides such as diisopropylaluminum hydride and
diisobutylaluminum hydride.

[0085]


Alkenylaluminum represented by



- 10 (In the formula, x, y, and z are each a positive number and $z \geq 2x$) such as isoprenylaluminum, alkylaluminum alkoxides such
as isobutylaluminum methoxide, isobutylaluminum ethoxide, and
isobutylaluminum isopropoxide, dialkylaluminum alkoxides such
as dimethylaluminum methoxide, diethylaluminum ethoxide, and
15 dibutylaluminum butoxide, and alkylaluminum, and
alkylaluminum sesquialkoxides such as ethylaluminum
sesquiethoxide and butylaluminum sesquibutoxide.

[0086]

- A partially alkoxyated alkyl aluminum having an average
20 composition represented by



- in the formula, R^a and R^b may be the same or different and
each denote a hydrocarbon group having 1 to 15 and preferably
1 to 4 carbon atoms, alkylaluminum aryloxides such as
25 diethylaluminum phenoxide, diethylaluminum (2,6-di-t-butyl-4-

methyl phenoxide), ethylaluminum bis(2,6-di-t-butyl-4-methyl phenoxide), diisobutylaluminum (2,6-di-t-butyl-4-methyl phenoxide), and isobutylaluminum bis(2,6-di-t-butyl-4-methyl phenoxide), dialkylaluminum halides such as dimethylaluminum chloride, diethylaluminum chloride, dibutylaluminum chloride, diethylaluminum bromide, and diisobutylaluminum chloride, alkylaluminum sesquihalides such as ethylaluminum sesquichloride, butylaluminum sesquichloride, and ethylaluminum sesquibromide, partially halogenated alkylaluminum such as alkylaluminum dihalides, e.g., ethylaluminum dichloride, propylaluminum dichloride, and butylaluminum dibromide, dialkylaluminum hydrides such as diethylaluminum hydride and dibutylaluminum hydride, other partially hydrogenated alkylaluminum such as alkylaluminum dihydrides, e.g., ethylaluminum dihydride and propylaluminum dihydride, and partially alkoxyated and halogenated alkylaluminum such as ethylaluminum ethoxychloride, butylaluminum butoxychloride, and ethylaluminum ethoxybromide.

[0087]

Compounds similar to the above-described organoaluminum compound can also be used. Examples thereof include an organoaluminum compound including two or more aluminum compounds bonded through a nitrogen atom. Specific examples of such a compound include $(C_2H_5)_2AlN(C_2H_5)Al(C_2H_5)_2$. Triethylaluminum and triisobutylaluminum are preferable.

[0088]

When the organoaluminum compound (E) is used, it is used in an amount of usually 0.001 to 1000 mmol and preferably 0.01 to 500 mmol per gram of the particulate carrier (A-3).

5 [0089]


An aliphatic amide described below or an ester-type, ether-type, ethoxylate-type, or polyethylene glycol-type nonionic surfactant may be used as the nonionic surfactant. The nonionic surfactant is used in an amount of 0.1 to 20
10 parts by weight, preferably 0.15 to 20 parts by weight, and more preferably 0.2 to 5 parts by weight relative to 100 parts by weight of the solid catalyst component prepared by mixing and bringing into contact (A-1), (A-2), and (A-3) with one another.

15 [0090]

(B) Aliphatic amide

The aliphatic amide (B) used in the present invention is a conventional nonionic surfactant and any known aliphatic amide may be used without any limitations. Preferred
20 examples of the aliphatic amide (B) include compounds represented by general formula (I) below.

[0091]



In general formula (I), m denoting the number of carbon
25 atoms in the alkyl group represented by (C_mH_{2m+1}) is in the

range of 1 to 30, preferably 6 to 20, and more preferably 8 to 18.

[0092]

Examples of the aliphatic amide (B) suited for use in the present invention include higher aliphatic amides such as lauryl diethanolamide, cetyl diethanolamide, stearyl diethanolamide, octyl diethanolamide, nonyl diethanolamide, and sec-lauryl diethanolamide. Among these, lauryl diethanolamide is preferred.

10 [0093]


A large number of ester-type, ether-type, ethoxylate-type, and polyethylene glycol-type compounds that function as nonionic surfactants are known. In this invention, the aliphatic amide represented by the general formula (I) above is particularly preferable to achieve the effects of the invention.

[0094]

(C) Organoaluminum compound

While any known organoaluminum can be used without any limitation as the organoaluminum compound (C) in the present invention, compounds represented by the general formula (II) below are preferred.

[0095]



25 In the formula, R^a and R^b may be the same or different and

each denote a hydrocarbon group having 1 to 20 and preferably 1 to 4 carbon atoms, m, n, and p satisfy the relations; $0 < m \leq 3$, $0 \leq n < 3$, $0 \leq p < 3$, and $m + n + p = 3$.

Specific examples of the compound represented by the general formula (II) above include tri-n-alkyl aluminum such as trimethylaluminum, triethylaluminum, tri-n-butylaluminum, tripropylaluminum, tripentylaluminum, trihexylaluminum, trioctylaluminum, and tridecylaluminum, tri-branched-alkylaluminum such as triisopropylaluminum, triisobutylaluminum, tri-sec-butylaluminum, tri-tert-butylaluminum, tri-2-methylbutylaluminum, tri-3-methylbutylaluminum, tri-2-methylpentylaluminum, tri-3-methylpentylaluminum, tri-4-methylpentylaluminum, tri-2-methylhexylaluminum, tri-3-methylhexylaluminum, and tri-2-ethylhexylaluminum, tricycloalkylaluminum such as tricyclohexylaluminum and tricyclooctylaluminum, triarylaluminum such as triphenylaluminum and tritolylaluminum, and dialkylaluminum hydrides such as diisopropylaluminum hydride and diisobutylaluminum hydride.

[0096]

Of the compounds represented by the general formula (II), a compound with p denoting 0 represented by the general formula (II-a) below is particularly preferable.

[0097]

25 $R_m^a Al(OR^b)_n$ (II-a)

In the general formula (II-a), R^a denotes a hydrocarbon group having 1 to 20 carbon atoms, R^b denotes a hydrocarbon group having 1 to 20 carbon atoms, m denotes an integer of 0 to 3, n denotes an integer of 0 to 3, and $m + n$ is 3.

5 Examples of the organoaluminum compound represented by the general formula (II-a) include trialkylaluminum such as trimethylaluminum, triethylaluminum, triisopropylaluminum, triisobutylaluminum, trioctylaluminum, and tri-2-ethylhexylaluminum; alkenylaluminum such as isoprenylaluminum,
10 and alkoxyaluminum such as dimethylaluminum methoxide, diethylaluminum ethoxide, diisobutylaluminum methoxide, triethylaluminum, and triisobutylaluminum.

[0098]

 Among the organoaluminum compounds represented by the
15 general formula (II-a) above, a compound having substituting hydrocarbon groups with many carbon atoms, e.g., a compound with R^a denoting a C6-C20 hydrocarbon group and R^b denoting a C6-C20 hydrocarbon group, is preferable since such a compound does not readily cause a decrease in activity of the catalyst
20 even when it is charged into a polymerization system. A compound having substituting hydrocarbon groups with fewer carbon atoms, such as a compound with R^a denoting a C1-C4 hydrocarbon group and R^b denoting a C1-C4 hydrocarbon group, is preferred for reducing the cost of the compound since the
25 molar amount of the compound per unit weight is high and thus

the effect of the invention is achieved by addition of the compound in a small amount. A compound with R^a denoting a C1-C4 hydrocarbon group and R^b denoting a C1-C4 hydrocarbon group is favorably used in gas-phase polymerization since the weight of the compound per unit mole is small. The hydrocarbon groups are preferably alkyl groups. Preferably, m is 2 or 3 and n is 0 or 1. Considering together the cost reduction, the activity improving effect, and operability, a compound with R^a denoting a C1-C8 hydrocarbon group and R^b denoting a C1-C8 hydrocarbon group is preferable and a compound with R^a denoting an ethyl group, R^b denoting an ethyl group, m = 2, and n = 1 is more preferable.

[0099]

Production of olefin polymer

According to the method for producing an olefin polymer of the present invention, one or more types of olefins are (co)polymerized in a polymerization vessel in the presence of the solid catalyst component for olefin polymerization (A), the aliphatic amide (B), and the organoaluminum compound (C).

[0100]

The method of adding the solid catalyst component for olefin polymerization (A), the aliphatic amide (B), and the organoaluminum compound (C) during the (co)polymerization may be freely selected. Examples of the method are as follows.

i) Charging (B) and then (C) into the polymerization vessel

separately.

ii) Charging (C) and then (B) into the polymerization vessel separately.

iii) Mixing and bringing into contact (B) and (C) with each
5 other without or in a solvent and then charging the resulting mixture into the polymerization vessel.

iv) Mixing and bringing into contact (B) and (C) with each other without or in a solvent and then charging the resulting mixture and additional (B) into the polymerization vessel.

10 v) Mixing and bringing into contact (B) and (C) with each other without or in a solvent and then charging the resulting mixture and additional (C) into the polymerization vessel.

[0101]

The method of adding the solid catalyst component for
15 olefin polymerization (A) may be any. (B) and (C) may be added according to any one of the methods i) to v) after (A) is added, or (A) may be added after (B) and (C) are added according to any one of the methods i) to v). A preferred method is to mix and bring into contact (B) and (C) with each
20 other without or in a solvent, charge the mixture into the polymerization vessel, and add (A) thereto.

[0102]

The addition ratio of the organoaluminum compound (C) to the aliphatic amide (B) may be any. In particular, a molar
25 ratio (C)/(B) is 0.01 to 4.0, preferably 0.01 to 3.5, more

preferably 0.01 to 3.2, yet more preferably 0.01 to 3.0, still more preferably 0.2 to 2.8, and most preferably 0.3 to 2.6.

[0103]

5 These preferable ranges of the addition ratio slightly differ depending on the type of the aliphatic amide (B) and the organoaluminum compound (C) in terms of the effect. When (B) is represented by $(C_mH_{2m+1}CO)N(CH_2CH_2OH)_2$, a total of the number of CO in the carbonyl group and that of OH in the
10 alcohol group is 3. Thus, in this case, from the standpoint of the effect, the molar ratio of the organoaluminum compound (C) is preferably up to a number that matches the total of the number of the carbonyl group and that of the alcohol group in the aliphatic amide.

15 [0104]

 The weight ratio (C)/(B) is preferably 0 to 3. At (C)/(B) = 0.1 to 2.5, the effect is intensified and preferable. More preferably, the weight ratio (C)/(B) is 0.2 to 2.

20 [0105]

 According to the method for producing an olefin polymer according to the present invention, the (co)polymerization can be conducted in any of a suspension, a solution, or a gas phase. In the present invention, polymerization of olefins
25 is preferably conducted through slurry polymerization or gas-

phase polymerization.

[0106]

Examples of the inert hydrocarbon medium used in the slurry polymerization include aliphatic hydrocarbons such as propane, butane, pentane, hexane, heptane, octane, decane, dodecane, and kerosene; alicyclic hydrocarbons such as cyclopentane, cyclohexane, and methylcyclopentane; aromatic hydrocarbons such as benzene, toluene and xylene; halogenated hydrocarbons such as ethylene chloride, chlorobenzene, and dichloromethane; and mixtures thereof. Among these inert hydrocarbon solvents, aliphatic hydrocarbons and alicyclic hydrocarbons are preferred.

[0107]

The temperature of olefin polymerization is usually in the range of -50°C to 150°C and preferably 0°C to 100°C for slurry polymerization and usually in the range of 0°C to 120°C and preferably 20°C to 100°C for gas-phase polymerization. The polymerization pressure is usually atmospheric to 10 MPaG and preferably atmospheric to 5 MPaG. The polymerization may be conducted through a batch operation, a semi-continuous operation, or a continuous operation.

[0108]

The polymerization can be conducted in two stages or more with different reaction conditions. The molecular weight of the obtained olefin polymer can be adjusted by

causing hydrogen to be present in the polymerization system or changing the polymerization temperature.

[0109]

Examples of the olefin used in polymerization include
5 ethylene and α -olefins having 3 to 20 carbon atoms such as ethylene, propylene, 1-butene, 1-pentene, 1-hexene, 4-methyl-1-pentene, 1-octene, 1-decene, 1-dodecene, 1-tetradecene, 1-hexadecene, 1-octadecene, and 1-eicosene. One of these olefins may be used alone or two or more of these olefins may
10 be used in combination. In the olefin polymer production of the present invention, copolymerizable monomers other than the olefins mentioned above may also be contained. Examples of such copolymerizable monomer include cyclic olefins having 3 to 20 carbon atoms, e.g., cyclopentene, cycloheptene,
15 norbornene, 5-methyl-2-norbornene, tetracyclododecene, and 2-methyl-1,4,5,8-dimethano-1,2,3,4,4a,5,8,8a-octahydronaphthalene. Styrene, vinylcyclohexane, and diene may also be used.

[0110]

20 Of these, an olefin monomer is preferably used, which contains 100 to 0 mol% of ethylene, 0 to 49 mol% of propylene, and 0 to 100 mol% of an olefin having 4 or more carbon atoms, preferably 100 to 0 mol% of ethylene, 0 to 20 mol% of propylene, and 0 to 100 mol% of an α -olefin having 4 or more
25 carbon atoms, more preferably 100 to 20 mol% of ethylene, 0

to 20 mol% of propylene, and 0 to 80 mol% of an α -olefin having 4 or more carbon atoms, and most preferably 100 to 20 mol% of ethylene and 0 to 80 mol% of an α -olefin having 4 or more carbon atoms. In particular, in the present invention,
5 an ethylene-based polymer containing ethylene as the main monomer is preferably produced. The ethylene-based polymer is preferably a (co)polymer containing 50 mol% or more of the ethylene component and, if needed, an α -olefin component having 4 to 10 carbon atoms.

10 [0111]

The amount of the catalyst for olefin polymerization (A) preferably used is usually 10^{-8} to 10^{-3} mol and preferably 10^{-7} to 10^{-4} mol on a basis of the transition metal atoms in the transition metal compound (A-1) per liter of the
15 polymerization volume. The amount of the organoaluminioxy compound (A-2) preferably used is 10 to 500 mol and preferably 20 to 200 mol on an aluminum atom basis per mole of the transition metal atoms in the transition metal compound (A-1).

20 [0112]

The amount of the aliphatic amide (B) used is usually 0.1 to 500 mg, preferably 0.2 to 200 mg, and more preferably 0.5 to 100 mg per liter of the polymerization volume.

[0113]

25 The amount of the organoaluminum compound (C) used is

usually 0.1 to 500 mg, preferably 0.2 to 200 mg, and more preferably 0.5 to 100 mg.

[Examples]

[0114]

5 The present invention will now be described in further details on the basis of the examples which do not limit the scope of the present invention.

[0115]

10 Methods for measuring the physical properties and characteristics of the polymer obtained by olefin polymerization in the presence of a catalyst containing a transition metal compound of the present invention are described below.

[0116]

15 [Melt flow rate (MFR)]

The melt flow rate is a figure determined at 190°C under a load of 2.16 kg according to the standard test method of ASTM D-1238.

[0117]

20 [Bulk density]

The bulk density was measured according to JIS K-6721.

[0118]

[Density]

25 A sheet (spacer shape: nine 45 × 45 × 0.5 mm pieces from a plate of 240 × 240 × 0.5 (thickness) mm) 0.5 mm in thickness

was shaped with a hydraulic heat pressing machine produced by Shinto Metal Industries Corporation set to 190°C at a pressure of 100 kg/cm² and was cooled by being compressed at a pressure of 100 kg/cm² with another hydraulic heat pressing machine produced by Shinto Metal Industries Corporation set to 20°C to prepare a measurement sample. A SUS plate having a thickness of 5 mm was used as the hot plate.

[0119]

The pressed sheet was heat-treated for 1 hour at 120°C, slowly and linearly cooled to room temperature in 1 hour, and subjected to measurement using a density-gradient tube.

[0120]

The molecular weight of the aliphatic amide used in Examples and Comparative Examples below was measured by the following process. Evaluation of the condition of the polymerization vessel inner wall during the (co)polymerization was conducted according to the polymerization method (1) below and evaluation of the polymerization activity was conducted by the polymerization method (2) below.

[0121]

•(B) Molecular weight of aliphatic amide

The molecular weight of the aliphatic amide was measured by GC-MS below.

25 [0122]

System: QP-2010 Plus produced by Shimadzu Corporation

Column: IC-5MS (0.32 ϕ $\times$ 30 m, film thickness: 0.5 μ m)

Column oven temperature: 70°C

Vaporizing chamber temperature: 250°C

5 Temperature elevation pattern: 70°C $\rightarrow$ (10 °C/min) $\rightarrow$ 320°C

Carrier gas: He (120 kPa)

Split ratio: 50

Since the sample as it is was not suitable for detection,
10 the sample was trimethylsilylated (TMS) to measure the
molecular weight. Chemistat 2500 (aliphatic diethanolamide
produced by Sanyo Chemical Industries, Ltd.) which is an
aliphatic amide (B) used in this experiment was measured. As
a result, a TMS compound having two trimethylsilyl groups was
15 detected as a main compound. The molecular weight of the
compound with trimethylsilyl groups was 431. The actual
structure was analyzed based on this result. The molecular
weight of the main structure was 287. In the description
below, calculation of the organoaluminum compound
20 (C)/aliphatic amide (B) addition ratio (molar ratio) was
conducted by assuming the molecular weight of the component
(B) to be 287. The main component of Chemistat 2500 was
found to be lauryldiethanolamide ($C_{11}H_{23}CO$)N(CH₂CH₂OH)₂ based
on the results of this molecular weight measurement.

25 [0123]

• Polymerization method (1): Evaluation of condition of autoclave wall

In Examples and Comparative Examples below, the condition of the autoclave wall was rated through the following polymerization method (1).

[0124]

All the solvents used in Examples and Comparative Examples were dehydrated solvents.

[0125]

10 The scheme of the slurry polymerization method for evaluating the condition of the autoclave wall is shown in Fig. 1.

[0126]

Heptane was introduced into a polymerization vessel at room temperature, the system was purged with ethylene, 1-hexene and a solid catalyst component for olefin polymerization ((A)-a) were introduced, and the temperature was elevated to 55°C. It takes approximately 10 minutes until the temperature reaches 55°C after the addition of
15
20 ((A)-a).

[0127]

An aliphatic amide (B) and an organoaluminum compound (C) were introduced, and then the solid catalyst component for olefin polymerization ((A)-b) was added again. The system was pressurized with ethylene and the temperature was
25

elevated to a predetermined level to conduct polymerization.

[0128]

In a typical polymerization, alkylaluminum is used as a scavenger after addition of the solid catalyst component for olefin polymerization ((A)-a) in Fig. 1. However, since alkylaluminum acts as an antistatic agent, evaluation of the compound (B) (antistatic agent) cannot be conducted. Thus, in the examples, the solid catalyst component for olefin polymerization ((A)-a) is used as a scavenger instead of alkylaluminum.

[0129]

Referring to Fig. 1, if the solid catalyst component for olefin polymerization ((A)-a) is not used, the polymer yield decreases significantly. Little polymer is obtained if the solid catalyst component for olefin polymerization ((A)-b) is not used in Fig. 1 since some of the active sites of the solid catalyst component for olefin polymerization ((A)-b) are deactivated by the impurities in the system. This is because aluminum (derived from aluminoxane) contained in the solid catalyst component for olefin polymerization ((A)-a) acts as a scavenger and deactivates the active sites of the olefin polymerization catalyst ((A)-a).

[0130]

The condition of the autoclave wall after the (co)polymerization was evaluated according to the following

standard.

[0131]

A: No adhesion of polymer to the autoclave wall etc.,
was observed

5 B: Slight adhesion of polymer to the autoclave wall etc.,
was observed

C: Adhesion of polymer to the autoclave wall etc., was
observed.

• Polymerization method (2): Evaluation of polymerization
10 activity

Evaluation of the polymerization activity in Examples
and Comparative Examples below was conducted by the following
polymerization method (2). All the solvents used in Examples
and Comparative Examples were dehydrated solvents.

15 [0132]

The scheme of the slurry polymerization method for
evaluating the polymerization activity in the autoclave is
shown in Fig. 2.

[0133]

20 Heptane was introduced into a polymerization vessel at
room temperature, the system was purged with ethylene, and 1-
hexene and a minimum amount (0.06 mmol) of
triisobutylaluminum as a scavenger were used. Then an
aliphatic amide (B) and an organoaluminum compound (C) were
25 added, a solid catalyst component for olefin polymerization

(A) was introduced, the system was pressurized with ethylene, and the temperature was elevated to a predetermined level to conduct polymerization.

[0134]

5 In the evaluation of the condition of the autoclave wall described above, an olefin polymerization catalyst was used as a scavenger. However, when the olefin polymerization catalyst is used as the scavenger and remains partly unconsumed in the system, such a catalyst also exhibits
10 activity and thus evaluation of the activity cannot be accurately conducted. Accordingly, in the evaluation of the activity, a minimum amount of triisobutylaluminum not contributing to the activity was used as a scavenger to enable evaluation of the activity.

15 [0135]

 If triisobutylaluminum is not used in Fig. 2, the polymer yield decreases significantly. This is because some of the active sites of the solid catalyst component for olefin polymerization (A) are deactivated by the impurities
20 in the system. If the solid catalyst component for olefin polymerization ((A)-a) is used as a scavenger and the solid catalyst component for olefin polymerization ((A)-2) is used as in the evaluation of the condition of the autoclave wall, the reproducibility of the evaluation regarding activity is
25 not achieved. This is because, after aluminum (derived from

aluminoxane) contained in the solid catalyst component for olefin polymerization ((A)-a) has acted as a scavenger, aluminum in the unconsumed solid catalyst component for olefin polymerization ((A)-a) remains and thus the solid catalyst component for olefin polymerization ((A)-a) itself exhibits polymerization capacity, resulting in failure to achieve reproducibility regarding activity.

[0136]

[Preparation Example 1] (Preparation of solid catalyst component (i))

Synthesis was conducted by the method disclosed in Japanese Unexamined Patent Application Publication No. 2000-327707. In particular, 10 kg of silica dried at 250°C for 10 hours was suspended in 154 L of toluene, and the suspension was cooled to 0°C. Then, to this suspension, 50.5 L of a toluene solution of methylaminoxane (Al = 1.52 mol/L) was added dropwise in 1 hour. During this process, the temperature of the system was maintained in the range of 0°C to 5°C. Reaction was subsequently conducted for 30 minutes at 0°C, then the temperature was elevated to 95°C in 1.5 hours, and reaction was conducted for 4 hours at that temperature. The temperature was then decreased to 60°C, and the supernatant was removed by decantation. The solid component obtained as such was washed twice with toluene and re-suspended in 100 L of toluene to give a total of 160 L of

the suspension.

[0137]

To the suspension obtained as such, 22.0 L of a toluene solution of bis(1,3-n-butylmethylcyclopentadienyl)zirconium dichloride (Zr = 25.7 mmol/L) was added dropwise at 80°C in 5 30 minutes, and the reaction was conducted at 80°C for 2 hours. The supernatant was removed, and the residue was washed twice with hexane. As a result, a solid catalyst component (i) was obtained.

10 [0138]

[Preparation Example 2] (Preparation of prepolymerized solid catalyst component (ii))

Synthesis was conducted by the method described in Japanese Unexamined Patent Application Publication No. 2000- 15 327707. Into a 350 L reactor thoroughly purged with nitrogen, 7.0 kg of the solid catalyst component prepared as above and hexane were charged so that the total volume was 285 L. After the system was cooled to 10°C, ethylene was blown into hexane for 5 minutes at a flow rate of 8 Nm³/h. During this 20 process, the temperature of the system was maintained at 10°C to 15°C. Then supply of ethylene was stopped and 2.4 mol of triisobutylaluminum and 1.2 kg of 1-hexene were charged. After the system was sealed, supply of ethylene was re-started at a flow rate of 8 Nm³/h. After 15 minutes, the flow 25 rate of ethylene was decreased to 2 Nm³/h and the pressure in

the system was adjusted to 0.8 kg/cm²-G. During this process, the temperature in the system increased to 35°C. Ethylene was then supplied at a flow rate of 4 Nm³/h for 3.5 hours while adjusting the temperature in the system in the range of 5 32°C to 35°C. During this process, the pressure in the system was maintained to 0.7 to 0.8 kg/cm²-G. Then the system was purged with nitrogen, the supernatant was removed, and the residue was washed twice with hexane. As a result, a prepolymerized solid catalyst component (ii) was obtained. 10 In Examples and Comparative Examples below, this was used as the solid catalyst component for olefin polymerization (A) (Note: (A)-a and (A)-b were also the same).

[0139]

[Preparation Example 3] (Preparation of antistatic agent 15 composition 1)

Into a 100 ml Erlenmeyer flask thoroughly purged with nitrogen, 8.86 ml of a toluene solution (4.06 mg/ml) of a higher aliphatic amide (trade name: Chemistat 2500 produced by Sanyo Chemicals Industries, Ltd.) acting as the component 20 (B) was charged, and 1.41 ml of a toluene solution (4.25 mg/ml) of diethylaluminum ethoxide acting as the component (C) was added thereto. Thereto, 10.27 ml of toluene was added to prepare an antistatic agent composition 1 in the form of a solution. This solution contained 36 mg of 25 Chemistat 2500 and 6 mg of diethylaluminum ethoxide.

[0140]

[Preparation Example 4] (Preparation of antistatic agent composition 2)

Into a 100 ml Erlenmeyer flask thoroughly purged with
5 nitrogen, 8.86 ml of a toluene solution (4.06 mg/ml) of a
higher aliphatic amide (trade name: Chemistat 2500 produced
by Sanyo Chemicals Industries, Ltd.) acting as the component
(B) was charged, and 5.64 ml of a toluene solution (4.25
mg/ml) of diethylaluminum ethoxide acting as the component
10 (C) was added thereto. Thereto, 14.50 ml of toluene was
added to prepare an antistatic agent composition 2 in the
form of a solution. This solution contained 36 mg of
Chemistat 2500 and 24 mg of diethylaluminum ethoxide.

[0141]

15 [Preparation Example 5] (Preparation of antistatic agent
composition 3)

Into a 100 ml Erlenmeyer flask thoroughly purged with
nitrogen, 8.86 ml of a toluene solution (4.06 mg/ml) of a
higher aliphatic amide (trade name: Chemistat 2500 produced
20 by Sanyo Chemicals Industries, Ltd.) acting as the component
(B) was charged, and 2.82 ml of a toluene solution (4.25
mg/ml) of diethylaluminum ethoxide acting as the component
(C) was added thereto. Thereto, 11.68 ml of toluene was
added to prepare an antistatic agent composition 3 in the
25 form of a solution. This solution contained 36 mg of

Chemistat 2500 and 12 mg of diethylaluminum ethoxide.

[0142]

[Preparation Example 6] (Preparation of antistatic agent composition 4)

5 Into a 100 ml Erlenmeyer flask thoroughly purged with nitrogen, 8.86 ml of a toluene solution (4.06 mg/ml) of a higher aliphatic amide (trade name: Chemistat 2500 produced by Sanyo Chemicals Industries, Ltd.) acting as the component (B) was charged, and 8.46 ml of a toluene solution (4.25
10 mg/ml) of diethylaluminum ethoxide acting as the component (C) was added thereto. Thereto, 17.32 ml of toluene was added to prepare an antistatic agent composition 4 in the form of a solution. This solution contained 36 mg of Chemistat 2500 and 36 mg of diethylaluminum ethoxide.

15 [0143]

[Preparation Example 7] (Preparation of antistatic agent composition 5)

 Into a 100 ml Erlenmeyer flask thoroughly purged with nitrogen, 8.86 ml of a toluene solution (4.06 mg/ml) of a
20 higher aliphatic amide (trade name: Chemistat 2500 produced by Sanyo Chemicals Industries, Ltd.) acting as the component (B) was charged, and 9.87 ml of a toluene solution (4.25 mg/ml) of diethylaluminum ethoxide acting as the component (C) was added thereto. Thereto, 18.73 ml of toluene was
25 added to prepare an antistatic agent composition 5 in the

form of a solution. This solution contained 36 mg of Chemistat 2500 and 42 mg of diethylaluminum ethoxide.

[0144]

[Preparation Example 8] (Preparation of antistatic agent
5 composition 6)

Into a 100 ml Erlenmeyer flask thoroughly purged with nitrogen, 8.86 ml of a toluene solution (4.06 mg/ml) of a higher aliphatic amide (trade name: Chemistat 2500 produced by Sanyo Chemicals Industries, Ltd.) acting as the component
10 (B) was charged, and 11.28 ml of a toluene solution (4.25 mg/ml) of diethylaluminum ethoxide acting as the component (C) was added thereto. Thereto, 20.14 ml of toluene was added to prepare an antistatic agent composition 8 in the form of a solution. This solution contained 36 mg of
15 Chemistat 2500 and 48 mg of diethylaluminum ethoxide.

[0145]

[Preparation Example 9] (Preparation of antistatic agent composition 7)

Into a 100 ml Erlenmeyer flask thoroughly purged with
20 nitrogen, 8.86 ml of a toluene solution (4.06 mg/ml) of a higher aliphatic amide (trade name: Chemistat 2500 produced by Sanyo Chemicals Industries, Ltd.) acting as the component (B) was charged, and 16.93 ml of a toluene solution (4.25 mg/ml) of diethylaluminum ethoxide acting as the component
25 (C) was added thereto. Thereto, 25.79 ml of toluene was

added to prepare an antistatic agent composition 7 in the form of a solution. This solution contained 36 mg of Chemistat 2500 and 72 mg of diethylaluminum ethoxide.

[0146]

- 5 [Preparation Example 10] (Preparation of antistatic agent composition 8)

Into a 100 ml Erlenmeyer flask thoroughly purged with nitrogen, 11.82 ml of a toluene solution (4.06 mg/ml) of a higher aliphatic amide (trade name: Chemistat 2500 produced
10 by Sanyo Chemicals Industries, Ltd.) acting as the component (B) was charged, and 5.64 ml of a toluene solution (4.25 mg/ml) of diethylaluminum ethoxide acting as the component (C) was added thereto. Thereto, 17.46 ml of toluene was added to prepare an antistatic agent composition 8 in the
15 form of a solution. This solution contained 48 mg of Chemistat 2500 and 24 mg of diethylaluminum ethoxide.

[0147]

- [Preparation Example 11] (Preparation of antistatic agent composition 9)

20 Into a 100 ml Erlenmeyer flask thoroughly purged with nitrogen, 3.84 ml of a toluene solution (4.06 mg/ml) of a higher aliphatic amide (trade name: Chemistat 2500 produced by Sanyo Chemicals Industries, Ltd.) acting as the component (B) was charged, and 2.82 ml of a toluene solution (4.25
25 mg/ml) of diethylaluminum ethoxide acting as the component

(C) was added thereto. Thereto, 6.66 ml of toluene was added to prepare an antistatic agent composition 9 in the form of a solution. This solution contained 16 mg of Chemistat 2500 and 12 mg of diethylaluminum ethoxide.

5 [0148]

[Preparation Example 12] (Preparation of antistatic agent composition 10)

Into a 100 ml Erlenmeyer flask thoroughly purged with nitrogen, 8.86 ml of a toluene solution (4.06 mg/ml) of a
10 higher aliphatic amide (trade name: Chemistat 2500 produced by Sanyo Chemicals Industries, Ltd.) acting as the component (B) was charged, and 11.28 ml of a toluene solution (4.25 mg/ml) of triisobutylaluminum acting as the component (C) was added thereto. Thereto, 20.14 ml of toluene was added to
15 prepare an antistatic agent composition 10 in the form of a solution. This solution contained 36 mg of Chemistat 2500 and 48 mg of triisobutylaluminum.

[0149]

[Examples 1-1]

20 Case of adding a mixed solution of components (B) and (C) during polymerization

<Polymerization method (1): Evaluation of condition of autoclave wall>

Into a 2000 ml stainless steel autoclave thoroughly
25 purged with nitrogen, 1000 ml of n-heptane was charged, the

system was purged with ethylene, then 40 ml of 1-hexene and 0.58 g of the prepolymerized solid catalyst component (ii) ((A)-a) prepared in Preparation Example 2 were charged, and the temperature was elevated to 55°C. It takes approximately 5 10 minutes until the temperature reaches 55°C after the addition of ((A)-a). Then 7.25 ml of the antistatic agent composition 2 prepared in Preparation Example 4 and 0.61 g of the prepolymerized solid catalyst component (ii) ((A)-b) prepared in Preparation Example 2 were added, and the 10 temperature in the system was elevated to 73°C. Ethylene was then introduced to start polymerization. While continuously supplying ethylene so that the pressure was maintained at 8.0 kg/cm²-G, polymerization was conducted for 90 minutes. After the termination of the polymerization, the system was 15 depressurized, the polymer was removed, and the condition of the autoclave after the polymerization was observed. No adhesion of polymers on the autoclave wall or impeller was found.

[0150]

20 It should be noted that in this autoclave system, 9.00 mg of Chemistat 2500 and 6.00 mg of diethylaluminum ethoxide were present. The molar ratio of diethylaluminum ethoxide to Chemistat 2500 was diethylaluminum ethoxide/Chemistat 2500 = 1.47.

25 [0151]

[Example 1-2]

<Polymerization method (2): Evaluation of polymerization activity>

Into a 1000 ml stainless steel autoclave thoroughly
5 purged with nitrogen, 500 ml of n-heptane was charged, the
system was purged with ethylene, and 20 ml of 1-hexene and
0.06 ml (0.06 mmol) of 1 mol/L triisobutylaluminum were added.
After the mixture was retained at room temperature for 5
minutes, 4.23 ml of the antistatic agent composition 2
10 prepared in Preparation Example 4 and 0.40 g of the
prepolymerized solid catalyst component (ii) (A) prepared in
Preparation Example 2 were added thereto and the temperature
in the system was elevated to 73°C. Ethylene was then
introduced to start polymerization. While continuously
15 supplying ethylene so that the pressure was maintained at 8.0
kg/cm²-G, polymerization was conducted for 90 minutes. After
termination of the polymerization, the system was
depressurized and the polymer was filtered, washed, and dried
under vacuum at 80°C for 12 hours. As a result, 152.5 g of
20 the polymer was obtained.

[0152]

It should be noted that in this autoclave system, 5.25
mg of Chemistat 2500 and 3.50 mg of diethylaluminum ethoxide
were present. The molar ratio of diethylaluminum ethoxide to
25 Chemistat 2500 was diethylaluminum ethoxide/Chemistat 2500 =

1.47.

[0153]

[Comparative Example 1]

Case of not adding components (B) and (C) during
5 polymerization

<Polymerization method (1): Evaluation of condition of
autoclave wall>

Into a 2000 ml stainless steel autoclave thoroughly
purged with nitrogen, 1000 ml of n-heptane was charged, the
10 system was purged with ethylene, 40 ml of 1-hexene and 0.64 g
of the prepolymerized solid catalyst component (ii) ((A)-a)
prepared in Preparation Example 2 were charged, and the
temperature was elevated to 55°C. Then 0.61 g of the
prepolymerized solid catalyst component (ii) ((A)-b) prepared
15 in Preparation Example 2 was added, and the temperature in
the system was elevated to 73°C. Ethylene was then
introduced to start polymerization. While continuously
supplying ethylene so that the pressure was maintained at 8.0
kg/cm²-G, polymerization was conducted for 90 minutes. After
20 the termination of the polymerization, the system was
depressurized, the polymer was removed, and the condition of
the autoclave after the polymerization was observed.
Adhesion of polymers to the autoclave wall or impeller was
found.

25 [0154]

[Comparative Example 2-1]

Case of adding only component (B) during polymerization

<Polymerization method (1): Evaluation of condition of autoclave wall>

5 Into a 2000 ml stainless steel autoclave thoroughly
purged with nitrogen, 1000 ml of n-heptane was charged, the
system was purged with ethylene, 40 ml of 1-hexene and 0.62 g
of the prepolymerized solid catalyst component (ii) ((A)-a)
prepared in Preparation Example 2 were charged, and the
10 temperature was elevated to 55°C. Then 2.22 ml of a toluene
solution (4.06 mg/ml) of a higher aliphatic amide (trade
name: Chemistat 2500 produced by Sanyo Chemicals Industries,
Ltd.) acting as the component (B) and 0.68 g of the
prepolymerized solid catalyst component (ii) ((A)-b) prepared
15 in Preparation Example 2 were added, and the temperature in
the system was elevated to 73°C. Ethylene was then
introduced to start polymerization. While continuously
supplying ethylene so that the pressure was maintained at 8.0
kg/cm²-G, polymerization was conducted for 90 minutes. After
20 the termination of the polymerization, the system was
depressurized, the polymer was removed, and the condition of
the autoclave after the polymerization was observed. No
adhesion of polymers to the autoclave wall or impeller was
found.

25 [0155]

It should be noted that in this autoclave system, 9.00 mg of Chemistat 2500 was present.

[0156]

[Comparative Example 2-2]

5 <Polymerization method (2): Evaluation of polymerization activity>

Into a 1000 ml stainless steel autoclave thoroughly purged with nitrogen, 500 ml of n-heptane was charged, the system was purged with ethylene, and 20 ml of 1-hexene and
10 0.06 ml (0.06 mmol) of 1 mol/L triisobutylaluminum were added. After the mixture was retained at room temperature for 5 minutes, 1.30 ml of a toluene solution (4.06 mg/ml) of a higher aliphatic amide (trade name: Chemistat 2500, produced by Sanyo Chemicals Industries, Ltd.) acting as the component
15 (B) and 0.40 g of the prepolymerized solid catalyst component (ii) (A) prepared in Preparation Example 2 were added thereto and the temperature in the system was elevated to 73°C. Ethylene was then introduced to start polymerization. While continuously supplying ethylene so that the pressure was
20 maintained at 8.0 kg/cm²-G, polymerization was conducted for 90 minutes. After termination of the polymerization, the system was depressurized and the polymer was filtered, washed, and dried under vacuum at 80°C for 12 hours. As a result, 129.6 g of the polymer was obtained.

25 [0157]

It should be noted that in this autoclave system, 5.25 mg of Chemistat 2500 was present.

[0158]

[Example 2-1]

5 Case of adding a mixed solution of components (B) and (C) during polymerization

<Polymerization method (1): Evaluation of condition of autoclave wall>

Into a 2000 ml stainless steel autoclave thoroughly
10 purged with nitrogen, 1000 ml of n-heptane was charged, the system was purged with ethylene, 40 ml of 1-hexene and 0.65 g of the prepolymerized solid catalyst component (ii) ((A)-a) prepared in Preparation Example 2 were charged, and the temperature was elevated to 55°C. Then 5.84 ml of the
15 antistatic agent composition 3 prepared in Preparation Example 5 and 0.68 g of the prepolymerized solid catalyst component (ii) ((A)-b) prepared in Preparation Example 2 were added, and the temperature in the system was elevated to 73°C. Ethylene was then introduced to start polymerization. While
20 continuously supplying ethylene so that the pressure was maintained at 8.0 kg/cm²-G, polymerization was conducted for 90 minutes. After the termination of the polymerization, the system was depressurized, the polymer was removed, and the condition of the autoclave after the polymerization was
25 observed. No adhesion of polymers to the autoclave wall or

impeller was found.

[0159]

It should be noted that in this autoclave system, 9.00 mg of Chemistat 2500 and 3.00 mg of diethylaluminum ethoxide were present. The molar ratio of diethylaluminum ethoxide to Chemistat 2500 was diethylaluminum ethoxide/Chemistat 2500 = 0.73.

[0160]

[Example 2-2]

10 <Polymerization method (2): Evaluation of polymerization activity>

Into a 1000 ml stainless steel autoclave thoroughly purged with nitrogen, 500 ml of n-heptane was charged, the system was purged with ethylene, and 20 ml of 1-hexene and 15 0.06 ml (0.06 mmol) of 1 mol/L triisobutylaluminum were added. After the mixture was retained at room temperature for 5 minutes, 3.41 ml of the antistatic agent composition 3 prepared in Preparation Example 5 and 0.40 g of the prepolymerized solid catalyst component (ii) (A) prepared in 20 Preparation Example 2 were added thereto and the temperature in the system was elevated to 73°C. Ethylene was then introduced to start polymerization. While continuously supplying ethylene so that the pressure was maintained at 8.0 kg/cm²-G, polymerization was conducted for 90 minutes. After 25 termination of the polymerization, the system was

depressurized and the polymer was filtered, washed, and dried under vacuum at 80°C for 12 hours. As a result, 146.5 g of the polymer was obtained.

[0161]

5 It should be noted that in this autoclave system, 5.25 mg of Chemistat 2500 and 1.75 mg of diethylaluminum ethoxide were present. The molar ratio of diethylaluminum ethoxide to Chemistat 2500 was diethylaluminum ethoxide/Chemistat 2500 = 0.73.

10 [0162]

[Example 3-1]

Case of adding a mixed solution of components (B) and (C) during polymerization

<Polymerization method (1): Evaluation of condition of
15 autoclave wall>

 Into a 2000 ml stainless steel autoclave thoroughly purged with nitrogen, 1000 ml of n-heptane was charged, the system was purged with ethylene, 40 ml of 1-hexene and 0.59 g of the prepolymerized solid catalyst component (ii) ((A)-a)
20 prepared in Preparation Example 2 were charged, and the temperature was elevated to 55°C. Then 8.66 ml of the antistatic agent composition 4 prepared in Preparation Example 6 and 0.58 g of the prepolymerized solid catalyst component (ii) ((A)-b) prepared in Preparation Example 2 were
25 added, and the temperature in the system was elevated to 73°C.

Ethylene was then introduced to start polymerization. While continuously supplying ethylene so that the pressure was maintained at 8.0 kg/cm²-G, polymerization was conducted for 90 minutes. After the termination of the polymerization, the system was depressurized, the polymer was removed, and the condition of the autoclave after the polymerization was observed. No adhesion of polymers to the autoclave wall or impeller was found.

[0163]

10 It should be noted that in this autoclave system, 9.00 mg of Chemistat 2500 and 9.00 mg of diethylaluminum ethoxide were present. The molar ratio of diethylaluminum ethoxide to Chemistat 2500 was diethylaluminum ethoxide/Chemistat 2500 = 2.20.

15 [0164]

[Example 3-2]

<Polymerization method (2): Evaluation of polymerization activity>

20 Into a 1000 ml stainless steel autoclave thoroughly purged with nitrogen, 500 ml of n-heptane was charged, the system was purged with ethylene, and 20 ml of 1-hexene and 0.06 ml (0.06 mmol) of 1 mol/L triisobutylaluminum were added. After the mixture was retained at room temperature for 5 minutes, 5.05 ml of the antistatic agent composition 4
25 prepared in Preparation Example 6 and 0.40 g of the

prepolymerized solid catalyst component (ii) (A) prepared in Preparation Example 2 were added thereto and the temperature in the system was elevated to 73°C. Ethylene was then introduced to start polymerization. While continuously supplying ethylene so that the pressure was maintained at 8.0 kg/cm²-G, polymerization was conducted for 90 minutes. After termination of the polymerization, the system was depressurized and the polymer was filtered, washed, and dried under vacuum at 80°C for 12 hours. As a result, 142.5 g of the polymer was obtained.

[0165]

It should be noted that in this autoclave system, 5.25 mg of Chemistat 2500 and 5.25 mg of diethylaluminum ethoxide were present. The molar ratio of diethylaluminum ethoxide to Chemistat 2500 was diethylaluminum ethoxide/Chemistat 2500 = 2.20.

[0166]

[Example 4-1]

Case of adding a mixed solution of components (B) and (C) during polymerization

<Polymerization method (1): Evaluation of condition of autoclave wall>

Into a 2000 ml stainless steel autoclave thoroughly purged with nitrogen, 1000 ml of n-heptane was charged, the system was purged with ethylene, 40 ml of 1-hexene and 0.6 g

of the prepolymerized solid catalyst component (ii) ((A)-a) prepared in Preparation Example 2 were charged, and the temperature was elevated to 55°C. Then 5.14 ml of the antistatic agent composition 1 prepared in Preparation
5 Example 3 and 0.6 g of the prepolymerized solid catalyst component (ii) ((A)-b) prepared in Preparation Example 2 were added, and the temperature in the system was elevated to 73°C. Ethylene was then introduced to start polymerization. While continuously supplying ethylene so that the pressure was
10 maintained at 8.0 kg/cm²-G, polymerization was conducted for 90 minutes. After the termination of the polymerization, the system was depressurized, the polymer was removed, and the condition of the autoclave after the polymerization was observed. No adhesion of polymers to the autoclave wall or
15 impeller was found.

[0167]

It should be noted that in this autoclave system, 9.00 mg of Chemistat 2500 and 1.50 mg of diethylaluminum ethoxide were present. The molar ratio of diethylaluminum ethoxide to
20 Chemistat 2500 was diethylaluminum ethoxide/Chemistat 2500 = 0.37.

[0168]

[Example 4-2]

<Polymerization method (2): Evaluation of polymerization
25 activity>

Into a 1000 ml stainless steel autoclave thoroughly
purged with nitrogen, 500 ml of n-heptane was charged, the
system was purged with ethylene, and 20 ml of 1-hexene and
0.06 ml (0.06 mmol) of 1 mol/L triisobutylaluminum were added.
5 After the mixture was retained at room temperature for 5
minutes, 3.00 ml of the antistatic agent composition 1
prepared in Preparation Example 3 and 0.40 g of the
prepolymerized solid catalyst component (ii) (A) prepared in
Preparation Example 2 were added thereto and the temperature
10 in the system was elevated to 73°C. Ethylene was then
introduced to start polymerization. While continuously
supplying ethylene so that the pressure was maintained at 8.0
kg/cm²-G, polymerization was conducted for 90 minutes. After
termination of the polymerization, the system was
15 depressurized and the polymer was filtered, washed, and dried
under vacuum at 80°C for 12 hours. As a result, 141.2 g of
the polymer was obtained.

[0169]

It should be noted that in this autoclave system, 5.25
20 mg of Chemistat 2500 and 0.88 mg of diethylaluminum ethoxide
were present. The molar ratio of diethylaluminum ethoxide to
Chemistat 2500 was diethylaluminum ethoxide/Chemistat 2500 =
0.37.

[0170]

25 [Example 5-1]

Case of adding a mixed solution of components (B) and (C)
during polymerization

<Polymerization method (1): Evaluation of condition of
autoclave wall>

5 The same operation as Example 4-1 was conducted except
that 9.38 ml of the antistatic agent composition 5 prepared
in Preparation Example 7 was added instead of 5.14 ml of the
antistatic agent composition 1 in Example 4-1. After the
termination of the polymerization, the condition of the
10 autoclave after the polymerization was checked. No adhesion
of polymers to the autoclave wall or impeller was found.

[0171]

It should be noted that in this autoclave system, 9.00
mg of Chemistat 2500 and 10.50 mg of diethylaluminum ethoxide
15 were present. The molar ratio of diethylaluminum ethoxide to
Chemistat 2500 was diethylaluminum ethoxide/Chemistat 2500 =
2.57.

[0172]

[Example 5-2]

20 <Polymerization method (2): Evaluation of polymerization
activity>

The same operation as Example 4-2 was conducted except
that 5.47 ml of the antistatic agent composition 5 prepared
in Preparation Example 7 was added instead of 3.00 ml of the
25 antistatic agent composition 1 in Example 4-2. After

termination of the polymerization, the system was depressurized and the polymer was filtered, washed, and dried under vacuum at 80°C for 12 hours. As a result, 122.4 g of the polymer was obtained.

5 [0173]

It should be noted that in this autoclave system, 5.25 mg of Chemistat 2500 and 6.13 mg of diethylaluminum ethoxide were present. The molar ratio of diethylaluminum ethoxide to Chemistat 2500 was diethylaluminum ethoxide/Chemistat 2500 =
10 2.57.

[0174]

[Example 6-1]

Case of adding a mixed solution of components (B) and (C)
during polymerization

15 <Polymerization method (1): Evaluation of condition of autoclave wall>

The same operation as Example 4-1 was conducted except that 10.08 ml of the antistatic agent composition 6 prepared in Preparation Example 8 was added instead of 5.14 ml of the
20 antistatic agent composition 1 in Example 4-1. After the termination of the polymerization, the condition of the autoclave after the polymerization was checked. No adhesion of polymers to the autoclave wall or impeller was found.

[0175]

25 It should be noted that in this autoclave system, 9.00

mg of Chemistat 2500 and 12.00 mg of diethylaluminum ethoxide were present. The molar ratio of diethylaluminum ethoxide to Chemistat 2500 was diethylaluminum ethoxide/Chemistat 2500 = 2.94.

5 [0176]

[Example 6-2]

<Polymerization method (2): Evaluation of polymerization activity>

The same operation as Example 4-2 was conducted except
10 that 5.88 ml of the antistatic agent composition 6 prepared in Preparation Example 8 was added instead of 3.00 ml of the antistatic agent composition 1 in Example 4-2. After termination of the polymerization, the system was depressurized and the polymer was filtered, washed, and dried
15 under vacuum at 80°C for 12 hours. As a result, 110.6 g of the polymer was obtained.

[0177]

It should be noted that in this autoclave system, 5.25 mg of Chemistat 2500 and 7.00 mg of diethylaluminum ethoxide
20 were present. The molar ratio of diethylaluminum ethoxide to Chemistat 2500 was diethylaluminum ethoxide/Chemistat 2500 = 2.94.

[0178]

[Example 7-1]

25 Case of adding a mixed solution of components (B) and (C)

during polymerization

<Polymerization method (1): Evaluation of condition of autoclave wall>

The same operation as Example 4-1 was conducted except
5 that 12.89 ml of the antistatic agent composition 7 prepared
in Preparation Example 9 was added instead of 5.14 ml of the
antistatic agent composition 1 in Example 4-1. After the
termination of the polymerization, the condition of the
autoclave after the polymerization was checked. No adhesion
10 of polymers to the autoclave wall or impeller was found.

[0179]

It should be noted that in this autoclave system, 9.00
mg of Chemistat 2500 and 18.00 mg of diethylaluminum ethoxide
were present. The molar ratio of diethylaluminum ethoxide to
15 Chemistat 2500 was diethylaluminum ethoxide/Chemistat 2500 =
4.41.

[0180]

[Example 7-2]

<Polymerization method (2): Evaluation of polymerization
20 activity>

The same operation as Example 4-2 was conducted except
that 7.52 ml of the antistatic agent composition 7 prepared
in Preparation Example 9 was added instead of 3.00 ml of the
antistatic agent composition 1 in Example 4-2. After
25 termination of the polymerization, the system was

depressurized and the polymer was filtered, washed, and dried under vacuum at 80°C for 12 hours. As a result, 108.0 g of the polymer was obtained.

[0181]

5 It should be noted that in this autoclave system, 5.25 mg of Chemistat 2500 and 10.50 mg of diethylaluminum ethoxide were present. The molar ratio of diethylaluminum ethoxide to Chemistat 2500 was diethylaluminum ethoxide/Chemistat 2500 = 4.41.

10 [0182]

[Example 8-1]

Case of adding a mixed solution of components (B) and (C) during polymerization

<Polymerization method (1): Evaluation of condition of
15 autoclave wall>

The same operation as Example 4-1 was conducted except that 8.73 ml of the antistatic agent composition 8 prepared in Preparation Example 10 was added instead of 5.14 ml of the antistatic agent composition 1 in Example 4-1. After the
20 termination of the polymerization, the condition of the autoclave after the polymerization was checked. No adhesion of polymers to the autoclave wall or impeller was found.

[0183]

It should be noted that in this autoclave system, 12.00
25 mg of Chemistat 2500 and 6.00 mg of diethylaluminum ethoxide

were present. The molar ratio of diethylaluminum ethoxide to Chemistat 2500 was diethylaluminum ethoxide/Chemistat 2500 = 1.10.

[0184]

5 [Example 8-2]

<Polymerization method (2): Evaluation of polymerization activity>

The same operation as Example 4-2 was conducted except that 5.09 ml of the antistatic agent composition 8 prepared
10 in Preparation Example 10 was added instead of 3.00 ml of the antistatic agent composition 1 in Example 4-2. After termination of the polymerization, the system was depressurized and the polymer was filtered, washed, and dried under vacuum at 80°C for 12 hours. As a result, 138.0 g of
15 the polymer was obtained.

[0185]

It should be noted that in this autoclave system, 7.00 mg of Chemistat 2500 and 3.50 mg of diethylaluminum ethoxide were present. The molar ratio of diethylaluminum ethoxide to
20 Chemistat 2500 was diethylaluminum ethoxide/Chemistat 2500 = 1.10.

[0186]

[Comparative Example 3-1]

Case of adding only component (B) during polymerization

25 <Polymerization method (1): Evaluation of condition of

autoclave wall>

Into a 2000 ml stainless steel autoclave thoroughly
purged with nitrogen, 1000 ml of n-heptane was charged, the
system was purged with ethylene, 40 ml of 1-hexene and 0.68 g
5 of the prepolymerized solid catalyst component (ii) ((A)-a)
prepared in Preparation Example 2 were charged, and the
temperature was elevated to 55°C. Then 5.91 ml of a toluene
solution (4.06 mg/ml) of a higher aliphatic amide (trade
name: Chemistat 2500 produced by Sanyo Chemicals Industries,
10 Ltd.) acting as the component (B) and 0.53 g of the
prepolymerized solid catalyst component (ii) ((A)-b) prepared
in Preparation Example 2 were added, and the temperature in
the system was elevated to 73°C. Ethylene was then
introduced to start polymerization. While continuously
15 supplying ethylene so that the pressure was maintained at 8.0
kg/cm²-G, polymerization was conducted for 90 minutes. After
the termination of the polymerization, the system was
depressurized, the polymer was removed, and the condition of
the autoclave after the polymerization was observed. No
20 adhesion of polymers to the autoclave wall or impeller was
found.

[0187]

It should be noted that in this autoclave system, 24.00
mg of Chemistat 2500 was present.

25 [0188]

[Comparative Example 3-2]

<Polymerization method (2): Evaluation of polymerization activity>

Into a 1000 ml stainless steel autoclave thoroughly
5 purged with nitrogen, 500 ml of n-heptane was charged, the
system was purged with ethylene, and 20 ml of 1-hexene and
0.06 ml (0.06 mmol) of 1 mol/L triisobutylaluminum were added.
After the mixture was retained at room temperature for 5
minutes, 3.04 ml of a toluene solution (4.06 mg/ml) of a
10 higher aliphatic amide (trade name: Chemistat 2500, produced
by Sanyo Chemicals Industries, Ltd.) acting as the component
(B) and 0.40 g of the prepolymerized solid catalyst component
(ii) (A) prepared in Preparation Example 2 were added thereto
and the temperature in the system was elevated to 73°C.
15 Ethylene was then introduced to start polymerization. While
continuously supplying ethylene so that the pressure was
maintained at 8.0 kg/cm²-G, polymerization was conducted for
90 minutes. After termination of the polymerization, the
system was depressurized and the polymer was filtered, washed,
20 and dried under vacuum at 80°C for 12 hours. As a result,
90.4 g of the polymer was obtained.

[0189]

It should be noted that in this autoclave system, 14.00
mg of Chemistat 2500 was present.

25 [0190]

[Example 9-1]

Case of adding a mixed solution of components (B) and (C)
during polymerization

<Polymerization method (1): Evaluation of condition of
5 autoclave wall>

The same operation as Example 4-1 was conducted except
that 10.08 ml of the antistatic agent composition 10 prepared
in Preparation Example 12 was added instead of 5.14 ml of the
antistatic agent composition 1 in Example 4-1. After the
10 termination of the polymerization, the condition of the
autoclave after the polymerization was checked. No adhesion
of polymers to the autoclave wall or impeller was found.

[0191]

It should be noted that in this autoclave system, 9.00
15 mg of Chemistat 2500 and 12.00 mg of triisobutylaluminum were
present. The molar ratio of triisobutylaluminum to Chemistat
2500 was triisobutylaluminum /Chemistat 2500 = 1.93.

[0192]

[Example 9-2]

20 <Polymerization method (2): Evaluation of polymerization
activity>

The same operation as Example 4-2 was conducted except
that 5.88 ml of the antistatic agent composition 10 prepared
in Preparation Example 12 was added instead of 3.00 ml of the
25 antistatic agent composition 1 in Example 4-2. After

termination of the polymerization, the system was depressurized and the polymer was filtered, washed, and dried under vacuum at 80°C for 12 hours. As a result, 178.2 g of the polymer was obtained.

5 [0193]

It should be noted that in this autoclave system, 5.25 mg of Chemistat 2500 and 7.00 mg of triisobutylaluminum were present. The molar ratio of triisobutylaluminum to Chemistat 2500 was triisobutylaluminum /Chemistat 2500 = 1.93.

10 [0194]

[Example 10-1]

Case of adding a mixed solution of components (B) and (C) during polymerization

<Polymerization method (1): Evaluation of condition of
15 autoclave wall>

In Examples 10-1, 10-2, 11-1, 11-2, 12-1, and 12-2 and Comparative Examples 4-1 and 4-2, a prepolymerized solid catalyst component (iii) was used as the solid catalyst component for olefin polymerization (A). The prepolymerized
20 solid catalyst component (iii) was prepared by drying the prepolymerized solid catalyst component (ii) prepared in Preparation Example 2 at room temperature and reduced pressure into a powdery catalyst and storing the powdery catalyst in a nitrogen atmosphere.

25 [0195]

Into a 2000 ml stainless steel autoclave thoroughly
purged with nitrogen, 1000 ml of n-heptane was charged, the
system was purged with ethylene, 40 ml of 1-hexene and 0.66 g
of the prepolymerized solid catalyst component (iii) ((A)-a)
5 were charged, and the temperature was elevated to 55°C. Then
5.84 ml of the antistatic agent composition 3 prepared in
Preparation Example 5 and 0.68 g of the prepolymerized solid
catalyst component (iii) ((A)-b) were added, and the
temperature in the system was elevated to 73°C. Ethylene was
10 then introduced to start polymerization. While continuously
supplying ethylene so that the pressure was maintained at 8.0
kg/cm²-G, polymerization was conducted for 90 minutes. After
the termination of the polymerization, the system was
depressurized, the polymer was removed, and the condition of
15 the autoclave after the polymerization was observed. No
adhesion of polymers to the autoclave wall or impeller was
found.

[0196]

It should be noted that in this autoclave system, 9.00
20 mg of Chemistat 2500 and 3.00 mg of diethylaluminum ethoxide
were present. The molar ratio of diethylaluminum ethoxide to
Chemistat 2500 was diethylaluminum ethoxide/Chemistat 2500 =
0.73.

[0197]

25 [Example 10-2]

<Polymerization method (2): Evaluation of polymerization activity>

Into a 1000 ml stainless steel autoclave thoroughly
purged with nitrogen, 500 ml of n-heptane was charged, the
5 system was purged with ethylene, and 20 ml of 1-hexene and
0.06 ml (0.06 mmol) of 1 mol/L triisobutylaluminum were added.
After the mixture was retained at room temperature for 5
minutes, 3.41 ml of the antistatic agent composition 3
prepared in Preparation Example 5 and 0.43 g of the
10 prepolymerized solid catalyst component (iii) (A) were added
thereto and the temperature in the system was elevated to
73°C. Ethylene was then introduced to start polymerization.
While continuously supplying ethylene so that the pressure
was maintained at 8.0 kg/cm²-G, polymerization was conducted
15 for 90 minutes. After termination of the polymerization, the
system was depressurized and the polymer was filtered, washed,
and dried under vacuum at 80°C for 12 hours. As a result,
147.1 g of the polymer was obtained.

[0198]

20 The physical properties of the obtained polymer were
determined. MFR was 0.17 g/10 min, the density was 927 kg/m³,
and the bulk density was 389 kg/m³.

[0199]

It should be noted that in this autoclave system, 5.25
25 mg of Chemistat 2500 and 1.75 mg of diethylaluminum ethoxide

were present. The molar ratio of diethylaluminum ethoxide to Chemistat 2500 was diethylaluminum ethoxide/Chemistat 2500 = 0.73.

[0200]

5 [Comparative Example 4-1]

Case of adding only component (B) during polymerization

<Polymerization method (1): Evaluation of condition of autoclave wall>

Into a 2000 ml stainless steel autoclave thoroughly
10 purged with nitrogen, 1000 ml of n-heptane was charged, the system was purged with ethylene, 40 ml of 1-hexene and 0.60 g of the prepolymerized solid catalyst component (iii) ((A)-a) were charged, and the temperature was elevated to 55°C. Then 2.22 ml of a toluene solution (4.06 mg/ml) of a higher
15 aliphatic amide (trade name: Chemistat 2500 produced by Sanyo Chemicals Industries, Ltd.) acting as the component (B) and 0.60 g of the prepolymerized solid catalyst component (iii) ((A)-b) were added, and the temperature in the system was elevated to 73°C. Ethylene was then introduced to start
20 polymerization. While continuously supplying ethylene so that the pressure was maintained at 8.0 kg/cm²-G, polymerization was conducted for 90 minutes. After the termination of the polymerization, the system was depressurized, the polymer was removed, and the condition of
25 the autoclave after the polymerization was observed. No

adhesion of polymers to the autoclave wall or impeller was found.

[0201]

It should be noted that in this autoclave system, 9.00
5 mg of Chemistat 2500 was present.

[0202]

[Comparative Example 4-2]

<Polymerization method (2): Evaluation of polymerization activity>

10 Into a 1000 ml stainless steel autoclave thoroughly
purged with nitrogen, 500 ml of n-heptane was charged, the
system was purged with ethylene, and 20 ml of 1-hexene and
0.06 ml (0.06 mmol) of 1 mol/L triisobutylaluminum were added.
After the mixture was retained at room temperature for 5
15 minutes, 1.30 ml of a toluene solution (4.06 mg/ml) of a
higher aliphatic amide (trade name: Chemistat 2500, produced
by Sanyo Chemicals Industries, Ltd.) acting as the component
(B) and 0.40 g of the prepolymerized solid catalyst component
(iii) were added thereto and the temperature in the system
20 was elevated to 73°C. Ethylene was then introduced to start
polymerization. While continuously supplying ethylene so
that the pressure was maintained at 8.0 kg/cm²-G,
polymerization was conducted for 90 minutes. After
termination of the polymerization, the system was
25 depressurized and the polymer was filtered, washed, and dried

under vacuum at 80°C for 12 hours. As a result, 115.8 g of the polymer was obtained.

[0203]

The physical properties of the obtained polymer were determined. MFR was 0.17 g/10 min, the density was 928 kg/m³, and the bulk density was 412 kg/m³.

[0204]

It should be noted that in this autoclave system, 5.25 mg of Chemistat 2500 was present.

10 [0205]

[Example 11-1]

Case of sequentially adding a mixed solution of components (B) and (C), and the component (B) during polymerization

<Polymerization method (1): Evaluation of condition of autoclave wall>

The same operation as Comparative Example 4-1 was conducted except that 3.34 ml of the antistatic agent composition 9 prepared in Preparation Example 11 and 1.26 ml of a toluene solution (4.06 mg/ml) of a higher aliphatic amide (trade name: Chemistat 2500 produced by Sanyo Chemicals Industries, Ltd.) acting as the component (B) were sequentially added instead of adding 2.22 ml of the toluene solution (4.06 mg/ml) of the higher aliphatic amide (trade name: Chemistat 2500 produced by Sanyo Chemicals Industries, Ltd.) acting as the component (B) in Comparative Example 4-1.

After the termination of the polymerization, the system was depressurized, the polymer was removed, and the condition of the autoclave after the polymerization was observed. No adhesion of polymers to the autoclave wall or impeller was
5 found.

[0206]

It should be noted that in this autoclave system, 9.00 mg of Chemistat 2500 and 3.00 mg of diethylaluminum ethoxide were present. The molar ratio of diethylaluminum ethoxide to
10 Chemistat 2500 was diethylaluminum ethoxide/Chemistat 2500 = 0.73.

[0207]

[Example 11-2]

<Polymerization method (2): Evaluation of polymerization
15 activity>

Into a 1000 ml stainless steel autoclave thoroughly purged with nitrogen, 500 ml of n-heptane was charged, the system was purged with ethylene, and 20 ml of 1-hexene and 0.06 ml (0.06 mmol) of 1 mol/L triisobutylaluminum were added.
20 After the mixture was retained at room temperature for 5 minutes, 1.95 ml of the antistatic agent composition 9 prepared in Preparation Example 11 and 0.37 g of the prepolymerized solid catalyst component (iii) (A) were added thereto and the temperature in the system was elevated to
25 73°C. Ethylene was then introduced to start polymerization.

While continuously supplying ethylene so that the pressure was maintained at 8.0 kg/cm²-G, polymerization was conducted for 90 minutes. After termination of the polymerization, the system was depressurized and the polymer was filtered, washed,
5 and dried under vacuum at 80°C for 12 hours. As a result, 119.2 g of the polymer was obtained.

The physical properties of the obtained polymer were determined. MFR was 0.20 g/10 min, the density was 928 kg/m³, and the bulk density was 402 kg/m³.

10 [0208]

It should be noted that in this autoclave system, 5.25 mg of Chemistat 2500 and 1.75 mg of diethylaluminum ethoxide were present. The molar ratio of diethylaluminum ethoxide to Chemistat 2500 was diethylaluminum ethoxide/Chemistat 2500 =
15 0.73.

[0209]

[Example 12-1]

Case of sequentially adding components (B) and (C)

<Polymerization method (1): Evaluation of condition of
20 autoclave wall>

The same operation as Comparative Example 4-1 was conducted except that 2.22 ml of a toluene solution (4.06 mg/ml) of a higher aliphatic amide (trade name: Chemistat 2500 produced by Sanyo Chemicals Industries, Ltd.) acting as
25 the component (B) and 0.71 ml of a toluene solution (4.25

mg/ml) of diethylaluminum ethoxide acting as the component (C) were sequentially added instead of 2.22 ml of the toluene solution (4.06 mg/ml) of the higher aliphatic amide (trade name: Chemistat 2500 produced by Sanyo Chemicals Industries, Ltd.) acting as the component (B) in Comparative Example 4-1. After the termination of the polymerization, the system was depressurized, the polymer was removed, and the condition of the autoclave after the polymerization was observed. No adhesion of polymers to the autoclave wall or impeller was found.

[0210]

It should be noted that in this autoclave system, 9.00 mg of Chemistat 2500 and 3.00 mg of diethylaluminum ethoxide were present. The molar ratio of diethylaluminum ethoxide to Chemistat 2500 was diethylaluminum ethoxide/Chemistat 2500 = 0.73.

[0211]

[Example 12-2]

<Polymerization method (2): Evaluation of polymerization activity>

Into a 1000 ml stainless steel autoclave thoroughly purged with nitrogen, 500 ml of n-heptane was charged, the system was purged with ethylene, and 20 ml of 1-hexene and 0.06 ml (0.06 mmol) of 1 mol/L triisobutylaluminum were added. After the mixture was retained at room temperature for 5

minutes, 1.30 ml of a toluene solution (4.06 mg/ml) of a higher aliphatic amide (trade name: Chemistat 2500, produced by Sanyo Chemicals Industries, Ltd.) acting as the component (B) and 0.41 ml of a toluene solution (4.25 mg/ml) of diethylaluminum ethoxide acting as the component (C) were sequentially added, 0.36 g of the prepolymerized solid catalyst component (iii) (A) was added thereto, and the temperature in the system was elevated to 73°C. Ethylene was then introduced to start polymerization. While continuously supplying ethylene so that the pressure was maintained at 8.0 kg/cm²-G, polymerization was conducted for 90 minutes. After termination of the polymerization, the system was depressurized and the polymer was filtered, washed, and dried under vacuum at 80°C for 12 hours. As a result, 104.4 g of the polymer was obtained.

[0212]

The physical properties of the obtained polymer were determined. MFR was 0.18 g/10 min, the density was 929 kg/m³, and the bulk density was 381 kg/m³.

[0213]

It should be noted that in this autoclave system, 9.00 mg of Chemistat 2500 and 3.00 mg of diethylaluminum ethoxide were present. The molar ratio of diethylaluminum ethoxide to Chemistat 2500 was diethylaluminum ethoxide/Chemistat 2500 = 0.73.

[0214]

[Example 13]

<Evaluation of operability for gas-phase polymerization>

Copolymerization of ethylene and 1-hexene was conducted
5 in a fluidized bed-type gas-phase reactor shown in Fig. 3.
The polymerization pressure was 1.5 MPaG, polymerization
temperature was 80°C, and the ethylene content in the
polymerization reactor was 65 mol%. The prepolymerized solid
catalyst component (iii), used as the solid catalyst
10 component for olefin polymerization, was supplied to the
polymerization reactor so that the polymer production rate
was 18 ton/hr. Hydrogen was used to adjust the molecular
weight of the polymer and 1-hexene was used to adjust the
density. A hydrocarbon-containing gas containing 28.2 mol%
15 of nitrogen, 65 mol% of ethylene, 1.8 mol% of 1-hexene, 5
mol% of isopentane, and 300 ppm of hydrogen was circulated in
a circulation gas line at a flow rate of 42 km³/hr.

[0215]

A mixed solution A was prepared as an antistatic agent
20 composition by mixing a higher aliphatic amide (trade name:
Chemistat 2500 produced by Sanyo Chemicals Industries, Ltd.)
and diethylaluminum ethoxide at a weight ratio of 9:7. The
mixed solution A was continuously supplied to the circulation
gas line.

25 [0216]

Further, a minimum amount of Chemistat 2500 needed for stable operation was continuously supplied alone to the circulation gas line. As a result, the reading of the wall thermometer was stabilized, adhesion or separation of polyethylene fines to or from the vessel wall was not observed, and safe operation was carried out.

[0217]

[Comparative Example 5]

<Evaluation of operability for gas-phase polymerization>

10 Evaluation was conducted under the same conditions as in Example 13 except that the mixed solution A was not supplied to the circulation gas line. In other words, a minimum amount of Chemistat 2500 needed for stable operation was continuously supplied alone to the circulation gas line. As
15 a result, the reading of the wall thermometer was stabilized, adhesion or separation of polyethylene fines to or from the vessel wall was not observed, and safe operation was carried out.

[0218]

20 [Comparative Example 6]

<Evaluation of operability for gas-phase polymerization>

Evaluation was conducted under the same conditions as in Comparative Example 5 except that the supply concentration of Chemistat alone relative to the production rate was decreased
25 by 5 ppm from that of Comparative Example 5. As a result,

the reading of the wall thermometer which had been stable repeated a rapid increase and a rapid decrease. In other words, adhesion and separation of polyethylene fines with a high catalyst content on a vessel wall were repeated and the operation condition became instable. If this condition is left to continue, fines will adhere to the wall, resulting in insufficient heat removal, and polyethylene masses will be generated, thereby rendering continuation of the operation impossible.

10 [Preparation Example 13] (Preparation of solid catalyst component (iv))

In 154 L of toluene, 10 kg of silica dried at 250°C for 10 hours was suspended, and the suspension was cooled to 0°C. To this suspension, 50.5 L of a toluene solution of 15 methylaminooxane (Al = 1.52 mol/L) was added dropwise in 1 hour. During this process, the temperature of the system was maintained in the range of 0°C to 5°C. Reaction was subsequently conducted for 30 minutes at 0°C, the temperature was elevated to 95°C in 1.5 hours, and reaction was conducted 20 for 4 hours at that temperature. The temperature was then decreased to 60°C, and the supernatant was removed by decantation. The solid component obtained as such was washed twice with toluene and re-suspended in 100 L of toluene to give a total of 160 L of the suspension.

25 [0219]

From the resulting suspension, 3.30 g of slurry was taken as a solid component. To this slurry, 38.6 ml of a toluene solution of dimethylmethylene(cyclopentadienyl)(2,7-di-t-butylfluorenyl)zirconium dichloride ($\text{Zr} = 3 \text{ mmol/L}$) was added dropwise at room temperature in 30 minutes, followed by reaction at room temperature for 1 hour. The supernatant was then removed and the residue was washed twice with hexane. As a result, a solid catalyst component (iv) was obtained.

[0220]

- 10 [Preparation Example 14] (Preparation of prepolymerized solid catalyst component (v))

Into a 300 ml reactor thoroughly purged with nitrogen, all of the solid catalyst component (iv) prepared in Preparation Example 13 above and hexane were charged so that the total volume was 50 ml. After the system was cooled to 10°C , 5.78 mmol of triisobutylaluminum was charged. After the system was sealed, supply of ethylene was started. With the increase in temperature in the system, prepolymerization was conducted with ethylene in an amount that can produce 3 g of polyethylene in 3.5 hours per gram of the solid component while adjusting the temperature in the system to 32°C to 35°C . Then, the system was purged with nitrogen, the supernatant was removed, and the residue was washed twice with hexane. As a result, a prepolymerized solid catalyst component (v) was obtained.

15
20
25

[Preparation Example 15] (Preparation of solid catalyst component (vi))

In 154 L of toluene, 10 kg of silica dried at 250°C for 10 hours was suspended, and the suspension was cooled to 0°C.
5 To this suspension, 50.5 L of a toluene solution of methylaminoxane (Al = 1.52 mol/L) was added dropwise in 1 hour. During this process, the temperature of the system was maintained in the range of 0°C to 5°C. Reaction was subsequently conducted for 30 minutes at 0°C, and the
10 temperature was elevated to 95°C in 1.5 hours, and reaction was conducted for 4 hours at that temperature. The temperature was then decreased to 60°C, and the supernatant was removed by decantation. The solid component obtained as such was washed twice with toluene and re-suspended in 100 L
15 of toluene to give a total of 160 L of the suspension.

[0221]

From the resulting suspension, 4.54 g of slurry was taken as a solid component. To this slurry, 60.0 ml of a toluene solution of ethylenebis(1-indenyl)zirconium
20 dichloride (Zr = 28.7 mmol/L) was added dropwise at room temperature in 30 minutes, followed by reaction at room temperature for 1 hour. The supernatant was then removed and the residue was washed twice with hexane. As a result, a solid catalyst component (vi) was obtained.

25 [Preparation Example 16] (Preparation of prepolymerized solid

catalyst component (vii))

To the prepolymerized solid catalyst component (ii) prepared in Preparation Example 2, 0.01 g of Chemistat 2500 (higher aliphatic amide produced by Sanyo Chemicals Industries, Ltd.)
5 was added per gram of the component (ii), followed by reaction for 4 hours at 35°C. The obtained solid catalyst component was filtered and dried at room temperature and a reduced pressure. As a result, a prepolymerized solid catalyst component (vii) was obtained.

10 [Preparation Example 17] (Preparation of antistatic agent composition 11)

Into a 100 ml Erlenmeyer flask thoroughly purged with nitrogen, 5.00 ml of a toluene solution (88.19 mg/ml) of Chemistat 2500 (higher aliphatic amide produced by Sanyo
15 Chemicals Industries, Ltd.) acting as the component (B) was charged, and 1.69 ml of a toluene solution (130.17 mg/ml) of diethylaluminum ethoxide acting as the component (C) was added thereto. Thereto, 56.30 ml of toluene was added to prepare an antistatic agent composition 11 in the form of a
20 solution. In 1 ml of this solution, 7.00 mg of Chemistat 2500 and 3.50 mg of triisobutylaluminum were contained.

[Preparation Example 18] (Preparation of antistatic agent composition 12)

Into a 100 ml Erlenmeyer flask thoroughly purged with
25 nitrogen, 5.00 ml of a toluene solution (88.19 mg/ml) of

Chemistat 2500 (higher aliphatic amide produced by Sanyo Chemicals Industries, Ltd.) acting as the component (B) was charged, and 2.26 ml of a toluene solution (130.17 mg/ml) of diethylaluminum ethoxide acting as the component (C) was
5 added thereto. Thereto, 55.73 ml of toluene was added to prepare an antistatic agent composition 12 in the form of a solution. In 1 ml of this solution, 7.00 mg of Chemistat 2500 and 4.67 mg of triisobutylaluminum were contained.

[Preparation Example 19] (Preparation of antistatic agent
10 composition 13)

Into a 100 ml Erlenmeyer flask thoroughly purged with nitrogen, 6.20 ml of a toluene solution (88.19 mg/ml) of Chemistat 2500 (higher aliphatic amide produced by Sanyo Chemicals Industries, Ltd.) acting as the component (B) was
15 charged, and 1.92 ml of a toluene solution (142.22 mg/ml) of diisobutylaluminum hydride acting as the component (C) was added thereto. Thereto, 69.99 ml of toluene was added to prepare an antistatic agent composition 13 in the form of a solution. In 1 ml of this solution, 7.00 mg of Chemistat
20 2500 and 3.50 mg of diisobutylaluminum hydride were contained.

[Preparation Example 20] (Preparation of antistatic agent composition 14)

Into a 100 ml Erlenmeyer flask thoroughly purged with nitrogen, 4.00 ml of a toluene solution (88.19 mg/ml) of
25 Chemistat 2500 (higher aliphatic amide produced by Sanyo

Chemicals Industries, Ltd.) acting as the component (B) was charged, and 3.10 ml of a toluene solution (142.22 mg/ml) of diisobutylaluminum hydride acting as the component (C) was added thereto. Thereto, 43.29 ml of toluene was added to
5 prepare an antistatic agent composition 14 in the form of a solution. In 1 ml of this solution, 7.00 mg of Chemistat 2500 and 8.75 mg of diisobutylaluminum hydride were contained. [Preparation Example 21] (Preparation of antistatic agent composition 15)

10 Into a 100 ml Erlenmeyer flask thoroughly purged with nitrogen, 5.50 ml of a toluene solution (88.19 mg/ml) of Chemistat 2500 (higher aliphatic amide produced by Sanyo Chemicals Industries, Ltd.) acting as the component (B) was charged, and 2.82 ml of a toluene solution (142.22 mg/ml) of
15 diisobutylaluminum hydride acting as the component (C) was added thereto. Thereto, 60.98 ml of toluene was added to prepare an antistatic agent composition 15 in the form of a solution. In 1 ml of this solution, 7.00 mg of Chemistat 2500 and 5.78 mg of diisobutylaluminum hydride were contained.
20 [Preparation Example 22] (Preparation of antistatic agent composition 16)

Into a 100 ml Erlenmeyer flask thoroughly purged with nitrogen, 5.80 ml of a toluene solution (88.19 mg/ml) of Chemistat 2500 (higher aliphatic amide produced by Sanyo
25 Chemicals Industries, Ltd.) acting as the component (B) was

charged, and 2.24 ml of a toluene solution (114.17 mg/ml) of triethylaluminum acting as the component (C) was added thereto. Thereto, 65.03 ml of toluene was added to prepare an antistatic agent composition 16 in the form of a solution.

5 In 1 ml of this solution, 7.00 mg of Chemistat 2500 and 3.50 mg of triethylaluminum were contained.

[Preparation Example 23] (Preparation of antistatic agent composition 17)

Into a 100 ml Erlenmeyer flask thoroughly purged with
10 nitrogen, 5.50 ml of a toluene solution (88.19 mg/ml) of Chemistat 2500 (higher aliphatic amide produced by Sanyo Chemicals Industries, Ltd.) acting as the component (B) was charged, and 2.83 ml of a toluene solution (114.17 mg/ml) of triethylaluminum acting as the component (C) was added
15 thereto. Thereto, 60.96 ml of toluene was added to prepare an antistatic agent composition 17 in the form of a solution. In 1 ml of this solution, 7.00 mg of Chemistat 2500 and 4.67 mg of triethylaluminum were contained.

[Preparation Example 24] (Preparation of antistatic agent
20 composition 18)

Into a 100 ml Erlenmeyer flask thoroughly purged with nitrogen, 6.40 ml of a toluene solution (88.19 mg/ml) of Chemistat 2500 (higher aliphatic amide produced by Sanyo Chemicals Industries, Ltd.) acting as the component (B) was
25 charged, and 1.00 ml of a toluene solution (282.49 mg/ml) of

tri-normal-hexylaluminum acting as the component (C) was added thereto. Thereto, 73.23 ml of toluene was added to prepare an antistatic agent composition 18 in the form of a solution. In 1 ml of this solution, 7.00 mg of Chemistat
5 2500 and 3.5 mg of tri-normal-hexylaluminum were contained.

[Preparation Example 25] (Preparation of antistatic agent composition 19)

Into a 100 ml Erlenmeyer flask thoroughly purged with nitrogen, 24.20 ml of a toluene solution (14 mg/ml) of AMIET
10 105 (polyoxyethylene coconut alkyl amine produced by Kao Corporation) acting as the component (B) was charged, and 1.30 ml of a toluene solution (130.17 mg/ml) of diethylaluminum ethoxide acting as the component (C) was added thereto. Thereto, 22.90 ml of toluene was added to
15 prepare an antistatic agent composition 19 in the form of a solution. In 1 ml of this solution, 7.00 mg of AMIET 105 and 3.50 mg of diethylaluminum ethoxide were contained.

[Preparation Example 26] (Preparation of antistatic agent composition 20)

20 Into a 100 ml Erlenmeyer flask thoroughly purged with nitrogen, 24.50 ml of a toluene solution (40 mg/ml) of EPAN 720 (polyoxyethylene polyoxypropylene block copolymer, produced by Dai-Ichi Kogyo Seiyaku Co., Ltd.) acting as the component (B) was charged, and 1.88 ml of a toluene solution
25 (130.17 mg/ml) of diethylaluminum ethoxide acting as the

component (C) was added thereto. Thereto, 43.62 ml of toluene was added to prepare an antistatic agent composition 20 in the form of a solution. In 1 ml of this solution, 14.00 mg of EPAN 720 and 3.50 mg of diethylaluminum ethoxide
5 were contained.

[Preparation Example 27] (Preparation of antistatic agent composition 21)

Into a 100 ml Erlenmeyer flask thoroughly purged with nitrogen, 3.90 ml of a toluene solution (40 mg/ml) of EMULGEN
10 108 (polyoxyethylene lauryl ether, produced by Kao Corporation) acting as the component (B) was charged, and 0.60 ml of a toluene solution (130.17 mg/ml) of diethylaluminum ethoxide acting as the component (C) was added thereto. Thereto, 17.79 ml of toluene was added to
15 prepare an antistatic agent composition 21 in the form of a solution. In 1 ml of this solution, 7.00 mg of EMULGEN 108 and 3.50 mg of diethylaluminum ethoxide were contained.

[Preparation Example 28] (Preparation of antistatic agent composition 22)

20 Into a 100 ml Erlenmeyer flask thoroughly purged with nitrogen, 3.00 ml of a toluene solution (40 mg/ml) of Electro-stripper EA (lauryl diethanolamine produced by Kao Corporation) acting as the component (B) was charged, and 0.92 ml of a toluene solution (130.17 mg/ml) of
25 diethylaluminum ethoxide acting as the component (C) was

added thereto. Thereto, 13.22 ml of toluene was added to
prepare an antistatic agent composition 22 in the form of a
solution. In 1 ml of this solution, 7.00 mg of Electro-
stripper EA and 7.00 mg of diethylaluminum ethoxide were
5 contained.

[Preparation Example 29] (Preparation of antistatic agent
composition 23)

Into a 100 ml Erlenmeyer flask thoroughly purged with
nitrogen, 24.20 ml of a toluene solution (14 mg/ml) of
10 Electro-stripper EA7 (polyoxyethylenelaurylamine capryl ester
produced by Kao Corporation) acting as the component (B) was
charged, and 1.30 ml of a toluene solution (130.17 mg/ml) of
diethylaluminum ethoxide acting as the component (C) was
added thereto. Thereto, 22.90 ml of toluene was added to
15 prepare an antistatic agent composition 23 in the form of a
solution. In 1 ml of this solution, 7.00 mg of Electro-
stripper EA7 and 3.50 mg of diethylaluminum ethoxide were
contained.

[Preparation Example 30] (Preparation of antistatic agent
20 composition 24)

Into a 100 ml Erlenmeyer flask thoroughly purged with
nitrogen, 10.00 ml of a toluene solution (40 mg/ml) of
Costelan AS100 (polyaminopolyol alkylallylsulfonic acid
produced by Costenoble GmbH) acting as the component (B) was
25 charged, and 1.54 ml of a toluene solution (130.17 mg/ml) of

diethylaluminum ethoxide acting as the component (C) was added thereto. Thereto, 45.61 ml of toluene was added to prepare an antistatic agent composition 24 in the form of a solution. In 1 ml of this solution, 7.00 mg of Costelan
5 AS100 and 3.50 mg of diethylaluminum ethoxide were contained. [Preparation Example 31] (Preparation of antistatic agent composition 25)

Into a 100 ml Erlenmeyer flask thoroughly purged with nitrogen, 10.00 ml of a toluene solution (40 mg/ml) of
10 Costelan AS100 (polyaminopolyol alkylallylsulfonic acid produced by Costenoble GmbH) acting as the component (B) was charged, and 0.71 ml of a toluene solution (282.49 mg/ml) of tri-normal-hexylaluminum acting as the component (C) was added thereto. Thereto, 46.43 ml of toluene was added to
15 prepare an antistatic agent composition 25 in the form of a solution. In 1 ml of this solution, 7.00 mg of Costelan AS100 and 3.50 mg of tri-normal-hexylaluminum were contained. [0222]

[Comparative Example 7-1]

20 Case of adding only component (B) during polymerization

<Polymerization method (1): Evaluation of condition of autoclave wall>

Into a 1000 ml stainless steel autoclave thoroughly purged with nitrogen, 500 ml of n-heptane was charged, the
25 system was purged with ethylene, 20 ml of 1-hexene and 0.27 g

of the prepolymerized solid catalyst component (iii) ((A)-a) were charged, and the temperature was elevated to 55°C. Then 6.03 ml of a toluene solution (4.06 mg/ml) of Chemistat 2500 (higher aliphatic amide produced by Sanyo Chemicals Industries, Ltd.) acting as the component (B) and 0.08 g of the solid catalyst component (i) ((A)-b) prepared in Preparation Example 1 were added, and the temperature in the system was elevated to 73°C. Ethylene was then introduced to start polymerization. While continuously supplying ethylene so that the pressure was maintained at 8.0 kg/cm²-G, polymerization was conducted for 90 minutes. After the termination of the polymerization, the system was depressurized, the polymer was removed, and the condition of the autoclave after the polymerization was observed. Adhesion of polymers to the autoclave wall or impeller was found.

[0223]

It should be noted that in this autoclave system, 24.50 mg of Chemistat 2500 was present.

[0224]

[Comparative Example 7-2]

<Polymerization method (2): Evaluation of polymerization activity>

Into a 1000 ml stainless steel autoclave thoroughly purged with nitrogen, 500 ml of n-heptane was charged, the

system was purged with ethylene, and 20 ml of 1-hexene and 0.06 ml (0.06 mmol) of 1 mol/L triisobutylaluminum were added. After the mixture was retained at room temperature for 5 minutes, 6.03 ml of a toluene solution (4.06 mg/ml) of
5 Chemistat 2500 (higher aliphatic amide produced by Sanyo Chemicals Industries, Ltd.) acting as the component (B) and 0.08 g of the solid catalyst component (i) (A) prepared in Preparation Example 1 were added thereto and the temperature in the system was elevated to 73°C. Ethylene was then
10 introduced to start polymerization. While continuously supplying ethylene so that the pressure was maintained at 8.0 kg/cm²-G, polymerization was conducted for 90 minutes. After termination of the polymerization, the system was depressurized and the polymer was filtered, washed, and dried
15 under vacuum at 80°C for 12 hours. As a result, 36.9 g of the polymer was obtained.

[0225]

It should be noted that in this autoclave system, 24.50 mg of Chemistat 2500 was present.

20 [0226]

[Example 14-1]

Case of adding a mixed solution of components (B) and (C) during polymerization

<Polymerization method (1): Evaluation of condition of
25 autoclave wall>

Into a 1000 ml stainless steel autoclave thoroughly
purged with nitrogen, 500 ml of n-heptane was charged, the
system was purged with ethylene, 20 ml of 1-hexene and 0.27 g
of the prepolymerized solid catalyst component (iii) ((A)-a)
5 were charged, and the temperature was elevated to 55°C. It
takes approximately 10 minutes until the temperature reaches
55°C after the addition of ((A)-a). Then 3.5 ml of the
antistatic agent composition 11 prepared in Preparation
Example 17 and 0.08 g of the solid catalyst component (i)
10 ((A)-b) prepared in Preparation Example 1 were added, and the
temperature in the system was elevated to 73°C. Ethylene was
then introduced to start polymerization. While continuously
supplying ethylene so that the pressure was maintained at 8.0
kg/cm²-G, polymerization was conducted for 90 minutes. After
15 the termination of the polymerization, the system was
depressurized, the polymer was removed, and the condition of
the autoclave after the polymerization was observed. No
adhesion of polymers to the autoclave wall or impeller was
found.

20 [0227]

It should be noted that in this autoclave system, 24.50
mg of Chemistat 2500 and 12.25 mg of diethylaluminum ethoxide
were present.

[0228]

25 [Example 14-2]

<Polymerization method (2): Evaluation of polymerization activity>

Into a 1000 ml stainless steel autoclave thoroughly
purged with nitrogen, 500 ml of n-heptane was charged, the
5 system was purged with ethylene, and 20 ml of 1-hexene and
0.06 ml (0.06 mmol) of 1 mol/L triisobutylaluminum were added.
After the mixture was retained at room temperature for 5
minutes, 3.5 ml of the antistatic agent composition 11
prepared in Preparation Example 17 and 0.08 g of the solid
10 catalyst component (i) (A) prepared in Preparation Example 1
were added thereto and the temperature in the system was
elevated to 73°C. Ethylene was then introduced to start
polymerization. While continuously supplying ethylene so
that the pressure was maintained at 8.0 kg/cm²-G,
15 polymerization was conducted for 90 minutes. After
termination of the polymerization, the system was
depressurized and the polymer was filtered, washed, and dried
under vacuum at 80°C for 12 hours. As a result, 81.3 g of
the polymer was obtained. The activity ratio was 220%
20 relative to 100% in Comparative Example 7-2.

[0229]

It should be noted that in this autoclave system, 24.50
mg of Chemistat 2500 and 12.25 mg of diethylaluminum ethoxide
were present.

25 [0230]

[Example 15-1]

Case of adding a mixed solution of components (B) and (C)
during polymerization

<Polymerization method (1): Evaluation of condition of
5 autoclave wall>

Into a 1000 ml stainless steel autoclave thoroughly
purged with nitrogen, 500 ml of n-heptane was charged, the
system was purged with ethylene, 20 ml of 1-hexene and 0.25 g
of the prepolymerized solid catalyst component (iii) ((A)-a)
10 were charged, and the temperature was elevated to 55°C. It
takes approximately 10 minutes until the temperature reaches
55°C after the addition of ((A)-a). Then 3.5 ml of the
antistatic agent composition 12 prepared in Preparation
Example 18 and 0.08 g of the solid catalyst component (i)
15 ((A)-b) prepared in Preparation Example 1 were added, and the
temperature in the system was elevated to 73°C. Ethylene was
then introduced to start polymerization. While continuously
supplying ethylene so that the pressure was maintained at 8.0
kg/cm²-G, polymerization was conducted for 90 minutes. After
20 the termination of the polymerization, the system was
depressurized, the polymer was removed, and the condition of
the autoclave after the polymerization was observed. No
adhesion of polymers to the autoclave wall or impeller was
found.

25 [0231]

It should be noted that in this autoclave system, 24.50 mg of Chemistat 2500 and 16.35 mg of diethylaluminum ethoxide were present.

[0232]

5 [Example 15-2]

<Polymerization method (2): Evaluation of polymerization activity>

Into a 1000 ml stainless steel autoclave thoroughly
purged with nitrogen, 500 ml of n-heptane was charged, the
10 system was purged with ethylene, and 20 ml of 1-hexene and
0.06 ml (0.06 mmol) of 1 mol/L triisobutylaluminum were added.
After the mixture was retained at room temperature for 5
minutes, 3.5 ml of the antistatic agent composition 12
prepared in Preparation Example 18 and 0.08 g of the solid
15 catalyst component (i) (A) prepared in Preparation Example 1
were added thereto and the temperature in the system was
elevated to 73°C. Ethylene was then introduced to start
polymerization. While continuously supplying ethylene so
that the pressure was maintained at 8.0 kg/cm²-G,
20 polymerization was conducted for 90 minutes. After
termination of the polymerization, the system was
depressurized and the polymer was filtered, washed, and dried
under vacuum at 80°C for 12 hours. As a result, 81.1 g of
the polymer was obtained. The activity ratio was 220%
25 (relative to 100% in Comparative Example 7-2).

[0233]

It should be noted that in this autoclave system, 24.50 mg of Chemistat 2500 and 16.35 mg of diethylaluminum ethoxide were present.

5 [0234]

[Comparative Example 8-1]

Case of adding only component (B) during polymerization

<Polymerization method (1): Evaluation of condition of autoclave wall>

10 Into a 1000 ml stainless steel autoclave thoroughly
purged with nitrogen, 500 ml of n-heptane was charged, the
system was purged with ethylene, 20 ml of 1-hexene and 0.08 g
of the solid catalyst component (i) ((A)-a) prepared in
Preparation Example 1 were charged, and the temperature was
15 elevated to 55°C. Then 6.90 ml of a toluene solution (4.06
mg/ml) of Chemistat 2500 (higher aliphatic amide produced by
Sanyo Chemicals Industries, Ltd.) acting as the component (B)
and 0.08 g of the solid catalyst component (i) ((A)-b)
prepared in Preparation Example 1 were added, and the
20 temperature in the system was elevated to 73°C. Ethylene was
then introduced to start polymerization. While continuously
supplying ethylene so that the pressure was maintained at 8.0
kg/cm²-G, polymerization was conducted for 90 minutes. After
the termination of the polymerization, the system was
25 depressurized, the polymer was removed, and the condition of

the autoclave after the polymerization was observed. Adhesion of polymers to the autoclave wall or impeller was found.

[0235]

5 It should be noted that in this autoclave system, 28.00 mg of Chemistat 2500 was present.

[0236]

[Comparative Example 8-2]

<Polymerization method (2): Evaluation of polymerization
10 activity>

 Into a 1000 ml stainless steel autoclave thoroughly purged with nitrogen, 500 ml of n-heptane was charged, the system was purged with ethylene, and 20 ml of 1-hexene and 0.06 ml (0.06 mmol) of 1 mol/L triisobutylaluminum were added.
15 After the mixture was retained at room temperature for 5 minutes, 6.90 ml of a toluene solution (4.06 mg/ml) of Chemistat 2500 (higher aliphatic amide produced by Sanyo Chemicals Industries, Ltd.) acting as the component (B) and 0.08 g of the solid catalyst component (i) (A) prepared in
20 Preparation Example 1 were added thereto and the temperature in the system was elevated to 73°C. Ethylene was then introduced to start polymerization. While continuously supplying ethylene so that the pressure was maintained at 8.0 kg/cm²-G, polymerization was conducted for 90 minutes. After
25 termination of the polymerization, the system was

depressurized and the polymer was filtered, washed, and dried under vacuum at 80°C for 12 hours. As a result, 25.6 g of the polymer was obtained.

[0237]

5 It should be noted that in this autoclave system, 28.00 mg of Chemistat 2500 was present.

[0238]

[Example 16]

Case of adding a mixed solution of components (B) and (C)
10 during polymerization

<Polymerization method (1): Evaluation of condition of autoclave wall>

Into a 1000 ml stainless steel autoclave thoroughly purged with nitrogen, 500 ml of n-heptane was charged, the
15 system was purged with ethylene, 20 ml of 1-hexene and 0.28 g of the prepolymerized solid catalyst component (iii) ((A)-a) were charged, and the temperature was elevated to 55°C. It takes approximately 10 minutes until the temperature reaches 55°C after the addition of ((A)-a). Then 4 ml of the
20 antistatic agent composition 11 prepared in Preparation Example 17 and 0.08 g of the solid catalyst component (i) ((A)-b) prepared in Preparation Example 1 were added, and the temperature in the system was elevated to 73°C. Ethylene was then introduced to start polymerization. While continuously
25 supplying ethylene so that the pressure was maintained at 8.0

kg/cm²-G, polymerization was conducted for 90 minutes. After the termination of the polymerization, the system was depressurized, the polymer was removed, and the condition of the autoclave after the polymerization was observed. No
5 adhesion of polymers to the autoclave wall or impeller was found.

[0239]

It should be noted that in this autoclave system, 28.00 mg of Chemistat 2500 and 14.00 mg of diethylaluminum ethoxide
10 were present.

[0240]

[Example 17-1]

Case of adding a mixed solution of components (B) and (C) during polymerization

15 <Polymerization method (1): Evaluation of condition of autoclave wall>

Into a 1000 ml stainless steel autoclave thoroughly purged with nitrogen, 500 ml of n-heptane was charged, the system was purged with ethylene, 20 ml of 1-hexene and 0.30 g
20 of the prepolymerized solid catalyst component (iii) ((A)-a) were charged, and the temperature was elevated to 55°C. It takes approximately 10 minutes until the temperature reaches 55°C after the addition of ((A)-a). Then 4 ml of the antistatic agent composition 12 prepared in Preparation
25 Example 18 and 0.08 g of the solid catalyst component (i)

((A)-b) prepared in Preparation Example 1 were added, and the temperature in the system was elevated to 73°C. Ethylene was then introduced to start polymerization. While continuously supplying ethylene so that the pressure was maintained at 8.0 kg/cm²-G, polymerization was conducted for 90 minutes. After the termination of the polymerization, the system was depressurized, the polymer was removed, and the condition of the autoclave after the polymerization was observed. No adhesion of polymers to the autoclave wall or impeller was found.

[0241]

It should be noted that in this autoclave system, 28.00 mg of Chemistat 2500 and 18.68 mg of diethylaluminum ethoxide were present.

[0242]

[Example 17-2]

<Polymerization method (2): Evaluation of polymerization activity>

Into a 1000 ml stainless steel autoclave thoroughly purged with nitrogen, 500 ml of n-heptane was charged, the system was purged with ethylene, and 20 ml of 1-hexene and 0.06 ml (0.06 mmol) of 1 mol/L triisobutylaluminum were added. After the mixture was retained at room temperature for 5 minutes, 4 ml of the antistatic agent composition 12 prepared in Preparation Example 18 and 0.08 g of the solid catalyst

component (i) (A) prepared in Preparation Example 1 were added thereto and the temperature in the system was elevated to 73°C. Ethylene was then introduced to start polymerization. While continuously supplying ethylene so that the pressure was maintained at 8.0 kg/cm²-G, polymerization was conducted for 90 minutes. After termination of the polymerization, the system was depressurized and the polymer was filtered, washed, and dried under vacuum at 80°C for 12 hours. As a result, 61.2 g of the polymer was obtained. The activity ratio was 239% relative to 100% in Comparative Example 8-2.

[0243]

It should be noted that in this autoclave system, 28.00 mg of Chemistat 2500 and 18.68 mg of diethylaluminum ethoxide were present.

[0244]

[Example 18-1]

Case of adding a mixed solution of components (B) and (C) during polymerization

<Polymerization method (1): Evaluation of condition of autoclave wall>

Into a 1000 ml stainless steel autoclave thoroughly purged with nitrogen, 500 ml of n-heptane was charged, the system was purged with ethylene, 20 ml of 1-hexene and 0.08 g of the solid catalyst component (i) ((A)-a) prepared in

Preparation Example 1 were charged, and the temperature was elevated to 55°C. It takes approximately 10 minutes until the temperature reaches 55°C after the addition of ((A)-a). Then 4 ml of the antistatic agent composition 11 prepared in Preparation Example 17 and 0.08 g of the solid catalyst component (i) ((A)-b) prepared in Preparation Example 1 were added, and the temperature in the system was elevated to 73°C. Ethylene was then introduced to start polymerization. While continuously supplying ethylene so that the pressure was maintained at 8.0 kg/cm²-G, polymerization was conducted for 90 minutes. After the termination of the polymerization, the system was depressurized, the polymer was removed, and the condition of the autoclave after the polymerization was observed. No adhesion of polymers to the autoclave wall or impeller was found.

[0245]

It should be noted that in this autoclave system, 28.00 mg of Chemistat 2500 and 14.00 mg of diethylaluminum ethoxide were present.

[0246]

[Example 18-2]

<Polymerization method (2): Evaluation of polymerization activity>

Into a 1000 ml stainless steel autoclave thoroughly purged with nitrogen, 500 ml of n-heptane was charged, the

system was purged with ethylene, and 20 ml of 1-hexene and 0.06 ml (0.06 mmol) of 1 mol/L triisobutylaluminum were added. After the mixture was retained at room temperature for 5 minutes, 4 ml of the antistatic agent composition 11 prepared in Preparation Example 17 and 0.08 g of the solid catalyst component (i) (A) prepared in Preparation Example 1 were added thereto and the temperature in the system was elevated to 73°C. Ethylene was then introduced to start polymerization. While continuously supplying ethylene so that the pressure was maintained at 8.0 kg/cm²-G, polymerization was conducted for 90 minutes. After termination of the polymerization, the system was depressurized and the polymer was filtered, washed, and dried under vacuum at 80°C for 12 hours. As a result, 85.3 g of the polymer was obtained. The activity ratio was 333% relative to 100% in Comparative Example 8-2.

[0247]

It should be noted that in this autoclave system, 28.00 mg of Chemistat 2500 and 14.00 mg of diethylaluminum ethoxide were present.

[0248]

[Comparative Example 9]

Case of adding only component (B) during polymerization

<Polymerization method (1): Evaluation of condition of autoclave wall>

Into a 1000 ml stainless steel autoclave thoroughly
purged with nitrogen, 500 ml of n-heptane was charged, the
system was purged with ethylene, 5 ml of 1-hexene and 0.24 g
of the prepolymerized solid catalyst component (iii) ((A)-a)
5 were charged, and the temperature was elevated to 55°C. Then
1.72 ml of a toluene solution (4.06 mg/ml) of Chemistat 2500
(higher aliphatic amide produced by Sanyo Chemicals
Industries, Ltd.) acting as the component (B) and 0.15 g of
the prepolymerized solid catalyst component (v) ((A)-b)
10 prepared in Preparation Example 14 were added, and the
temperature in the system was elevated to 73°C. Ethylene was
then introduced to start polymerization. While continuously
supplying ethylene so that the pressure was maintained at 8.0
kg/cm²-G, polymerization was conducted for 90 minutes. After
15 the termination of the polymerization, the system was
depressurized, the polymer was removed, and the condition of
the autoclave after the polymerization was observed. No
adhesion of polymers to the autoclave wall or impeller was
found.

20 [0249]

It should be noted that in this autoclave system, 7.00
mg of Chemistat 2500 was present.

[0250]

[Comparative Example 10-1]

25 Case of adding only component (B) during polymerization

<Polymerization method (1): Evaluation of condition of autoclave wall>

Into a 1000 ml stainless steel autoclave thoroughly purged with nitrogen, 500 ml of n-heptane was charged, the
5 system was purged with ethylene, 5 ml of 1-hexene and 0.15 g of the prepolymerized solid catalyst component (v) ((A)-a) prepared in Preparation Example 14 were charged, and the temperature was elevated to 55°C. Then 1.72 ml of a toluene solution (4.06 mg/ml) of Chemistat 2500 (higher aliphatic
10 amide produced by Sanyo Chemicals Industries, Ltd.) acting as the component (B) and 0.15 g of the prepolymerized solid catalyst component (v) ((A)-b) prepared in Preparation Example 14 were added, and the temperature in the system was elevated to 73°C. Ethylene was then introduced to start
15 polymerization. While continuously supplying ethylene so that the pressure was maintained at 8.0 kg/cm²-G, polymerization was conducted for 90 minutes. After the termination of the polymerization, the system was depressurized, the polymer was removed, and the condition of
20 the autoclave after the polymerization was observed. No adhesion of polymers to the autoclave wall or impeller was found.

[0251]

It should be noted that in this autoclave system, 7.00
25 mg of Chemistat 2500 was present.

[0252]

[Comparative Example 10-2]

<Polymerization method (2): Evaluation of polymerization activity>

5 Into a 1000 ml stainless steel autoclave thoroughly
purged with nitrogen, 500 ml of n-heptane was charged, the
system was purged with ethylene, and 5 ml of 1-hexene and
0.06 ml (0.06 mmol) of 1 mol/L triisobutylaluminum were added.
After the mixture was retained at room temperature for 5
10 minutes, 1.72 ml of a toluene solution (4.06 mg/ml) of
Chemistat 2500 (higher aliphatic amide produced by Sanyo
Chemicals Industries, Ltd.) acting as the component (B) and
0.15 g of the prepolymerized solid catalyst component (v) (A)
prepared in Preparation Example 14 were added thereto and the
15 temperature in the system was elevated to 73°C. Ethylene was
then introduced to start polymerization. While continuously
supplying ethylene so that the pressure was maintained at 8.0
kg/cm²-G, polymerization was conducted for 90 minutes. After
termination of the polymerization, the system was
20 depressurized and the polymer was filtered, washed, and dried
under vacuum at 80°C for 12 hours. As a result, 38.5 g of
the polymer was obtained.

[0253]

It should be noted that in this autoclave system, 7.00
25 mg of Chemistat 2500 was present.

[0254]

[Example 19]

Case of adding a mixed solution of components (B) and (C)
during polymerization

5 <Polymerization method (1): Evaluation of condition of
autoclave wall>

Into a 1000 ml stainless steel autoclave thoroughly
purged with nitrogen, 500 ml of n-heptane was charged, the
system was purged with ethylene, 5 ml of 1-hexene and 0.28 g
10 of the prepolymerized solid catalyst component (iii) ((A)-a)
were charged, and the temperature was elevated to 55°C. It
takes approximately 10 minutes until the temperature reaches
55°C after the addition of ((A)-a). Then 1 ml of the
antistatic agent composition 11 prepared in Preparation
15 Example 17 and 0.15 g of the prepolymerized solid catalyst
component (v) ((A)-b) prepared in Preparation Example 14 were
added, and the temperature in the system was elevated to 73°C.
Ethylene was then introduced to start polymerization. While
continuously supplying ethylene so that the pressure was
20 maintained at 8.0 kg/cm²-G, polymerization was conducted for
90 minutes. After the termination of the polymerization, the
system was depressurized, the polymer was removed, and the
condition of the autoclave after the polymerization was
observed. No adhesion of polymers to the autoclave wall or
25 impeller was found.

[0255]

It should be noted that in this autoclave system, 7.00 mg of Chemistat 2500 and 3.50 mg of diethylaluminum ethoxide were present.

5 [0256]

[Example 20-1]

Case of adding a mixed solution of components (B) and (C) during polymerization

10 <Polymerization method (1): Evaluation of condition of autoclave wall>

Into a 1000 ml stainless steel autoclave thoroughly purged with nitrogen, 500 ml of n-heptane was charged, the system was purged with ethylene, 5 ml of 1-hexene and 0.15 g of the prepolymerized solid catalyst component (v) ((A)-a) prepared in Preparation Example 14 were charged, and the temperature was elevated to 55°C. It takes approximately 10 minutes until the temperature reaches 55°C after the addition of ((A)-a). Then 1 ml of the antistatic agent composition 11 prepared in Preparation Example 17 and 0.15 g of the prepolymerized solid catalyst component (v) ((A)-b) prepared in Preparation Example 14 were added, and the temperature in the system was elevated to 73°C. Ethylene was then introduced to start polymerization. While continuously supplying ethylene so that the pressure was maintained at 8.0 kg/cm²-G, polymerization was conducted for 90 minutes. After

the termination of the polymerization, the system was depressurized, the polymer was removed, and the condition of the autoclave after the polymerization was observed. No adhesion of polymers to the autoclave wall or impeller was
5 found.

[0257]

It should be noted that in this autoclave system, 7.00 mg of Chemistat 2500 and 3.50 mg of diethylaluminum ethoxide were present.

10 [0258]

[Example 20-2]

<Polymerization method (2): Evaluation of polymerization activity>

Into a 1000 ml stainless steel autoclave thoroughly
15 purged with nitrogen, 500 ml of n-heptane was charged, the system was purged with ethylene, and 5 ml of 1-hexene and 0.06 ml (0.06 mmol) of 1 mol/L triisobutylaluminum were added. After the mixture was retained at room temperature for 5 minutes, 1 ml of the antistatic agent composition 11 prepared
20 in Preparation Example 17 and 0.15 g of the prepolymerized solid catalyst component (v) (A) prepared in Preparation Example 14 were added thereto and the temperature in the system was elevated to 73°C. Ethylene was then introduced to start polymerization. While continuously supplying ethylene
25 so that the pressure was maintained at 8.0 kg/cm²-G,

polymerization was conducted for 90 minutes. After termination of the polymerization, the system was depressurized and the polymer was filtered, washed, and dried under vacuum at 80°C for 12 hours. As a result, 59.3 g of
5 the polymer was obtained. The activity ratio was 154% relative to 100% in Comparative Example 10-2.

[0259]

It should be noted that in this autoclave system, 7.00 mg of Chemistat 2500 and 3.50 mg of diethylaluminum ethoxide
10 were present.

[0260]

[Example 21]

Case of adding a mixed solution of components (B) and (C)
during polymerization

15 <Polymerization method (2): Evaluation of polymerization activity>

Into a 1000 ml stainless steel autoclave thoroughly purged with nitrogen, 500 ml of n-heptane was charged, the system was purged with ethylene, and 5 ml of 1-hexene and
20 0.06 ml (0.06 mmol) of 1 mol/L triisobutylaluminum were added. After the mixture was retained at room temperature for 5 minutes, 1 ml of the antistatic agent composition 12 prepared in Preparation Example 18 and 0.15 g of the prepolymerized solid catalyst component (v) (A) prepared in Preparation
25 Example 14 were added thereto and the temperature in the

system was elevated to 73°C. Ethylene was then introduced to start polymerization. While continuously supplying ethylene so that the pressure was maintained at 8.0 kg/cm²-G, polymerization was conducted for 90 minutes. After
5 termination of the polymerization, the system was depressurized and the polymer was filtered, washed, and dried under vacuum at 80°C for 12 hours. As a result, 44.0 g of the polymer was obtained. The activity ratio was 114% relative to 100% in Comparative Example 10-2.

10 [0261]

It should be noted that in this autoclave system, 7.00 mg of Chemistat 2500 and 4.67 mg of diethylaluminum ethoxide were present.

[0262]

15 [Comparative Example 11-1]

Case of adding only component (B) during polymerization

<Polymerization method (1): Evaluation of condition of autoclave wall>

Into a 1000 ml stainless steel autoclave thoroughly
20 purged with nitrogen, 500 ml of n-heptane was charged, the system was purged with ethylene, 0.08 g of the solid catalyst component (i) ((A)-a) prepared in Preparation Example 1 was charged, and the temperature was elevated to 55°C. Then 5.17 ml of a toluene solution (4.06 mg/ ml) of Chemistat 2500
25 (higher aliphatic amide produced by Sanyo Chemicals

Industries, Ltd.) acting as the component (B) and 0.14 g of the solid catalyst component (i) ((A)-b) prepared in Preparation Example 1 were added, and the temperature in the system was elevated to 73°C. Ethylene was then introduced to start polymerization. While continuously supplying ethylene so that the pressure was maintained at 8.0 kg/cm²-G, polymerization was conducted for 90 minutes. After the termination of the polymerization, the system was depressurized, the polymer was removed, and the condition of the autoclave after the polymerization was observed. No adhesion of polymers to the autoclave wall or impeller was found.

[0263]

It should be noted that in this autoclave system, 21.00 mg of Chemistat 2500 was present.

[0264]

[Comparative Example 11-2]

<Polymerization method (2): Evaluation of polymerization activity>

Into a 1000 ml stainless steel autoclave thoroughly purged with nitrogen, 500 ml of n-heptane was charged, the system was purged with ethylene, and 0.06 ml (0.06 mmol) of 1 mol/L triisobutylaluminum was added. After the mixture was retained at room temperature for 5 minutes, 5.17 ml of a toluene solution (4.06 mg/ ml) of Chemistat 2500 (higher

aliphatic amide produced by Sanyo Chemicals Industries, Ltd.) acting as the component (B) and 0.14 g of the solid catalyst component (i) (A) prepared in Preparation Example 1 were added thereto and the temperature in the system was elevated
5 to 73°C. Ethylene was then introduced to start polymerization. While continuously supplying ethylene so that the pressure was maintained at 8.0 kg/cm²-G, polymerization was conducted for 90 minutes. After termination of the polymerization, the system was
10 depressurized and the polymer was filtered, washed, and dried under vacuum at 80°C for 12 hours. As a result, 89.7 g of the polymer was obtained.

[0265]

It should be noted that in this autoclave system, 21.00
15 mg of Chemistat 2500 was present.

[0266]

[Example 22-1]

Case of adding a mixed solution of components (B) and (C)
during polymerization

20 <Polymerization method (1): Evaluation of condition of autoclave wall>

Into a 1000 ml stainless steel autoclave thoroughly purged with nitrogen, 500 ml of n-heptane was charged, the system was purged with ethylene, 0.08 g of the solid catalyst
25 component (i) ((A)-a) prepared in Preparation Example 1 was

charged, and the temperature was elevated to 55°C. It takes approximately 10 minutes until the temperature reaches 55°C after the addition of ((A)-a). Then 3 ml of the antistatic agent composition 12 prepared in Preparation Example 18 and 5 0.14 g of the solid catalyst component (i) ((A)-b) prepared in Preparation Example 1 were added, and the temperature in the system was elevated to 73°C. Ethylene was then introduced to start polymerization. While continuously supplying ethylene so that the pressure was maintained at 8.0 10 kg/cm²-G, polymerization was conducted for 90 minutes. After the termination of the polymerization, the system was depressurized, the polymer was removed, and the condition of the autoclave after the polymerization was observed. No adhesion of polymers to the autoclave wall or impeller was 15 found.

[0267]

It should be noted that in this autoclave system, 21.00 mg of Chemistat 2500 and 14.00 mg of diethylaluminum ethoxide were present.

20 [0268]

[Example 22-2]

<Polymerization method (2): Evaluation of polymerization activity>

Into a 1000 ml stainless steel autoclave thoroughly 25 purged with nitrogen, 500 ml of n-heptane was charged, the

system was purged with ethylene, and 0.06 ml (0.06 mmol) of 1
mol/L triisobutylaluminum was added. After the mixture was
retained at room temperature for 5 minutes, 3 ml of the
antistatic agent composition 12 prepared in Preparation
5 Example 18 and 0.14 g of the solid catalyst component (i) (A)
prepared in Preparation Example 1 were added thereto and the
temperature in the system was elevated to 73°C. Ethylene was
then introduced to start polymerization. While continuously
supplying ethylene so that the pressure was maintained at 8.0
10 kg/cm²-G, polymerization was conducted for 90 minutes. After
termination of the polymerization, the system was
depressurized and the polymer was filtered, washed, and dried
under vacuum at 80°C for 12 hours. As a result, 103.2 g of
the polymer was obtained. The activity ratio was 115%
15 relative to 100% in Comparative Example 11-2.

[0269]

It should be noted that in this autoclave system, 21.00
mg of Chemistat 2500 and 14.00 mg of diethylaluminum ethoxide
were present.

20 [0270]

[Comparative Example 12-1]

Case of adding only component (B) during polymerization

<Polymerization method (1): Evaluation of condition of
autoclave wall>

25 Into a 1000 ml stainless steel autoclave thoroughly

purged with nitrogen, 500 ml of n-heptane was charged, the system was purged with ethylene, 0.30 g of the prepolymerized solid catalyst component (v) ((A)-a) prepared in Preparation Example 14 was charged, and the temperature was elevated to 5 55°C. Then 3.45 ml of a toluene solution (4.06 mg/ ml) of Chemistat 2500 (higher aliphatic amide produced by Sanyo Chemicals Industries, Ltd.) acting as the component (B) and 0.15 g of the prepolymerized solid catalyst component (v) ((A)-b) prepared in Preparation Example 14 were added, and 10 the temperature in the system was elevated to 73°C. Ethylene was then introduced to start polymerization. While continuously supplying ethylene so that the pressure was maintained at 8.0 kg/cm²-G, polymerization was conducted for 90 minutes. After the termination of the polymerization, the 15 system was depressurized, the polymer was removed, and the condition of the autoclave after the polymerization was observed. No adhesion of polymers to the autoclave wall or impeller was found.

[0271]

20 It should be noted that in this autoclave system, 14.00 mg of Chemistat 2500 was present.

[0272]

[Comparative Example 12-2]

<Polymerization method (2): Evaluation of polymerization
25 activity>

Into a 1000 ml stainless steel autoclave thoroughly
purged with nitrogen, 500 ml of n-heptane was charged, the
system was purged with ethylene, and 0.06 ml (0.06 mmol) of 1
mol/L triisobutylaluminum was added. After the mixture was
5 retained at room temperature for 5 minutes, 3.45 ml of a
toluene solution (4.06 mg/ ml) of Chemistat 2500 (higher
aliphatic amide produced by Sanyo Chemicals Industries, Ltd.)
acting as the component (B) and 0.15 g of the prepolymerized
solid catalyst component (v) (A) prepared in Preparation
10 Example 14 were added thereto and the temperature in the
system was elevated to 73°C. Ethylene was then introduced to
start polymerization. While continuously supplying ethylene
so that the pressure was maintained at 8.0 kg/cm²-G,
polymerization was conducted for 90 minutes. After
15 termination of the polymerization, the system was
depressurized and the polymer was filtered, washed, and dried
under vacuum at 80°C for 12 hours. As a result, 38.4 g of
the polymer was obtained.

[0273]

20 It should be noted that in this autoclave system, 14.00
mg of Chemistat 2500 was present.

[0274]

[Example 23-1]

Case of adding a mixed solution of components (B) and (C)
25 during polymerization

<Polymerization method (1): Evaluation of condition of autoclave wall>

Into a 1000 ml stainless steel autoclave thoroughly
purged with nitrogen, 500 ml of n-heptane was charged, the
5 system was purged with ethylene, 0.30 g of the prepolymerized
solid catalyst component (v) ((A)-a) prepared in Preparation
Example 14 was charged, and the temperature was elevated to
55°C. It takes approximately 10 minutes until the
temperature reaches 55°C after the addition of ((A)-a). Then
10 2 ml of the antistatic agent composition 11 prepared in
Preparation Example 17 and 0.15 g of the prepolymerized solid
catalyst component (v) ((A)-b) prepared in Preparation
Example 14 were added, and the temperature in the system was
elevated to 73°C. Ethylene was then introduced to start
15 polymerization. While continuously supplying ethylene so
that the pressure was maintained at 8.0 kg/cm²-G,
polymerization was conducted for 90 minutes. After the
termination of the polymerization, the system was
depressurized, the polymer was removed, and the condition of
20 the autoclave after the polymerization was observed. No
adhesion of polymers to the autoclave wall or impeller was
found.

[0275]

It should be noted that in this autoclave system, 14.00
25 mg of Chemistat 2500 and 7.00 mg of diethylaluminum ethoxide

were present.

[0276]

[Example 23-2]

<Polymerization method (2): Evaluation of polymerization
5 activity>

Into a 1000 ml stainless steel autoclave thoroughly
purged with nitrogen, 500 ml of n-heptane was charged, the
system was purged with ethylene, and 0.06 ml (0.06 mmol) of 1
mol/L triisobutylaluminum was added. After the mixture was
10 retained at room temperature for 5 minutes, 2 ml of the
antistatic agent composition 11 prepared in Preparation
Example 17 and 0.15 g of the prepolymerized solid catalyst
component (v) (A) prepared in Preparation Example 14 were
added thereto and the temperature in the system was elevated
15 to 73°C. Ethylene was then introduced to start
polymerization. While continuously supplying ethylene so
that the pressure was maintained at 8.0 kg/cm²-G,
polymerization was conducted for 90 minutes. After
termination of the polymerization, the system was
20 depressurized and the polymer was filtered, washed, and dried
under vacuum at 80°C for 12 hours. As a result, 85.5 g of
the polymer was obtained. The activity ratio was 223%
relative to 100% in Comparative Example 12-2.

[0277]

25 It should be noted that in this autoclave system, 14.00

mg of Chemistat 2500 and 7.00 mg of diethylaluminum ethoxide were present.

[0278]

[Comparative Example 13-1]

5 Case of adding only component (B) during polymerization

<Polymerization method (1): Evaluation of condition of autoclave wall>

Into a 1000 ml stainless steel autoclave thoroughly
purged with nitrogen, 500 ml of n-heptane was charged, the
10 system was purged with ethylene, 5 ml of 1-hexene and 0.15 g
of the solid catalyst component (vi) ((A)-a) prepared in
Preparation Example 15 were charged, and the temperature was
elevated to 55°C. Then 6.90 ml of a toluene solution (4.06
mg/ ml) of Chemistat 2500 (higher aliphatic amide produced by
15 Sanyo Chemicals Industries, Ltd.) acting as the component (B)
and 0.15 g of the solid catalyst component (vi) ((A)-b)
prepared in Preparation Example 15 were added, and the
temperature in the system was elevated to 73°C. Ethylene was
then introduced to start polymerization. While continuously
20 supplying ethylene so that the pressure was maintained at 8.0
kg/cm²-G, polymerization was conducted for 90 minutes. After
the termination of the polymerization, the system was
depressurized, the polymer was removed, and the condition of
the autoclave after the polymerization was observed.
25 Adhesion of polymers to the autoclave wall or impeller was

found.

[0279]

It should be noted that in this autoclave system, 28.00 mg of Chemistat 2500 was present.

5 [0280]

[Comparative Example 13-2]

<Polymerization method (2): Evaluation of polymerization activity>

Into a 1000 ml stainless steel autoclave thoroughly
10 purged with nitrogen, 500 ml of n-heptane was charged, the system was purged with ethylene, and 5 ml of 1-hexene and 0.06 ml (0.06 mmol) of 1 mol/L triisobutylaluminum were added. After the mixture was retained at room temperature for 5 minutes, 6.90 ml of a toluene solution (4.06 mg/ ml) of
15 Chemistat 2500 (higher aliphatic amide produced by Sanyo Chemicals Industries, Ltd.) acting as the component (B) and 0.15 g of the solid catalyst component (vi) (A) prepared in Preparation Example 15 were added thereto and the temperature in the system was elevated to 73°C. Ethylene was then
20 introduced to start polymerization. While continuously supplying ethylene so that the pressure was maintained at 8.0 kg/cm²-G, polymerization was conducted for 90 minutes. After termination of the polymerization, the system was depressurized and the polymer was filtered, washed, and dried
25 under vacuum at 80°C for 12 hours. As a result, 68.1 g of

the polymer was obtained.

[0281]

It should be noted that in this autoclave system, 28.00 mg of Chemistat 2500 was present.

5 [0282]

[Comparative Example 14]

Case of adding only component (B) during polymerization

<Polymerization method (1): Evaluation of condition of autoclave wall>

10 Into a 1000 ml stainless steel autoclave thoroughly
purged with nitrogen, 500 ml of n-heptane was charged, the
system was purged with ethylene, 5 ml of 1-hexene and 0.15 g
of the solid catalyst component (vi) ((A)-a) prepared in
Preparation Example 15 were charged, and the temperature was
15 elevated to 55°C. Then 10.34 ml of a toluene solution (4.06
mg/ ml) of Chemistat 2500 (higher aliphatic amide produced by
Sanyo Chemicals Industries, Ltd.) acting as the component (B)
and 0.15 g of the solid catalyst component (vi) ((A)-b)
prepared in Preparation Example 15 were added, and the
20 temperature in the system was elevated to 73°C. Ethylene was
then introduced to start polymerization. While continuously
supplying ethylene so that the pressure was maintained at 8.0
kg/cm²-G, polymerization was conducted for 90 minutes. After
the termination of the polymerization, the system was
25 depressurized, the polymer was removed, and the condition of

the autoclave after the polymerization was observed. Adhesion of polymers to the autoclave wall or impeller was found.

[0283]

5 It should be noted that in this autoclave system, 42.00 mg of Chemistat 2500 was present.

[0284]

[Example 24-1]

Case of adding a mixed solution of components (B) and (C)
10 during polymerization

<Polymerization method (1): Evaluation of condition of autoclave wall>

Into a 1000 ml stainless steel autoclave thoroughly purged with nitrogen, 500 ml of n-heptane was charged, the
15 system was purged with ethylene, 5 ml of 1-hexene and 0.15 g of the solid catalyst component (vi) ((A)-a) prepared in Preparation Example 15 were charged, and the temperature was elevated to 55°C. It takes approximately 10 minutes until the temperature reaches 55°C after the addition of ((A)-a).
20 Then 4 ml of the antistatic agent composition 11 prepared in Preparation Example 17 and 0.15 g of the solid catalyst component (vi) ((A)-b) prepared in Preparation Example 15 were added, and the temperature in the system was elevated to 73°C. Ethylene was then introduced to start polymerization.
25 While continuously supplying ethylene so that the pressure

was maintained at 8.0 kg/cm²-G, polymerization was conducted for 90 minutes. After the termination of the polymerization, the system was depressurized, the polymer was removed, and the condition of the autoclave after the polymerization was observed. No adhesion of polymers to the autoclave wall or impeller was found.

[0285]

It should be noted that in this autoclave system, 28.00 mg of Chemistat 2500 and 14.00 mg of diethylaluminum ethoxide were present.

[0286]

[Example 24-2]

<Polymerization method (2): Evaluation of polymerization activity>

Into a 1000 ml stainless steel autoclave thoroughly purged with nitrogen, 500 ml of n-heptane was charged, the system was purged with ethylene, and 5 ml of 1-hexene and 0.06 ml (0.06 mmol) of 1 mol/L triisobutylaluminum were added. After the mixture was retained at room temperature for 5 minutes, 4 ml of the antistatic agent composition 11 prepared in Preparation Example 17 and 0.15 g of the solid catalyst component (vi) (A) prepared in Preparation Example 15 were added thereto and the temperature in the system was elevated to 73°C. Ethylene was then introduced to start polymerization. While continuously supplying ethylene so

that the pressure was maintained at 8.0 kg/cm²-G, polymerization was conducted for 90 minutes. After termination of the polymerization, the system was depressurized and the polymer was filtered, washed, and dried
5 under vacuum at 80°C for 12 hours. As a result, 117.2 g of the polymer was obtained. The activity ratio was 172% relative to 100% in Comparative Example 13-2.

[0287]

It should be noted that in this autoclave system, 28.00
10 mg of Chemistat 2500 and 14.00 mg of diethylaluminum ethoxide were present.

[0288]

[Example 25-1]

Case of adding a mixed solution of components (B) and (C)
15 during polymerization

<Polymerization method (1): Evaluation of condition of autoclave wall>

Into a 1000 ml stainless steel autoclave thoroughly purged with nitrogen, 500 ml of n-heptane was charged, the
20 system was purged with ethylene, 5 ml of 1-hexene and 0.15 g of the solid catalyst component (vi) ((A)-a) prepared in Preparation Example 15 were charged, and the temperature was elevated to 55°C. It takes approximately 10 minutes until the temperature reaches 55°C after the addition of ((A)-a).
25 Then 4 ml of the antistatic agent composition 11 prepared in

Preparation Example 18 and 0.15 g of the solid catalyst component (vi) ((A)-b) prepared in Preparation Example 15 were added, and the temperature in the system was elevated to 73°C. Ethylene was then introduced to start polymerization.

5 While continuously supplying ethylene so that the pressure was maintained at 8.0 kg/cm²-G, polymerization was conducted for 90 minutes. After the termination of the polymerization, the system was depressurized, the polymer was removed, and the condition of the autoclave after the polymerization was

10 observed. No adhesion of polymers to the autoclave wall or impeller was found.

[0289]

It should be noted that in this autoclave system, 28.00 mg of Chemistat 2500 and 18.68 mg of diethylaluminum ethoxide

15 were present.

[0290]

[Example 25-2]

<Polymerization method (2): Evaluation of polymerization activity>

20 Into a 1000 ml stainless steel autoclave thoroughly purged with nitrogen, 500 ml of n-heptane was charged, the system was purged with ethylene, and 5 ml of 1-hexene and 0.06 ml (0.06 mmol) of 1 mol/L triisobutylaluminum were added. After the mixture was retained at room temperature for 5

25 minutes, 4 ml of the antistatic agent composition 11 prepared

in Preparation Example 18 and 0.15 g of the solid catalyst component (vi) (A) prepared in Preparation Example 15 were added thereto and the temperature in the system was elevated to 73°C. Ethylene was then introduced to start
5 polymerization. While continuously supplying ethylene so that the pressure was maintained at 8.0 kg/cm²-G, polymerization was conducted for 90 minutes. After termination of the polymerization, the system was depressurized and the polymer was filtered, washed, and dried
10 under vacuum at 80°C for 12 hours. As a result, 91.0 g of the polymer was obtained. The activity ratio was 134% relative to 100% in Comparative Example 13-2.

[0291]

It should be noted that in this autoclave system, 28.00
15 mg of Chemistat 2500 and 18.68 mg of diethylaluminum ethoxide were present.

[0292]

[Example 26-1]

Case of adding a mixed solution of components (B) and (C)
20 during polymerization

<Polymerization method (1): Evaluation of condition of autoclave wall>

Into a 1000 ml stainless steel autoclave thoroughly purged with nitrogen, 500 ml of n-heptane was charged, the
25 system was purged with ethylene, 5 ml of 1-hexene and 0.15 g

of the solid catalyst component (vi) ((A)-a) prepared in Preparation Example 15 were charged, and the temperature was elevated to 55°C. It takes approximately 10 minutes until the temperature reaches 55°C after the addition of ((A)-a).
5 Then 2 ml of the antistatic agent composition 11 prepared in Preparation Example 17 and 0.15 g of the solid catalyst component (vi) ((A)-b) prepared in Preparation Example 15 were added, and the temperature in the system was elevated to 73°C. Ethylene was then introduced to start polymerization.
10 While continuously supplying ethylene so that the pressure was maintained at 8.0 kg/cm²-G, polymerization was conducted for 90 minutes. After the termination of the polymerization, the system was depressurized, the polymer was removed, and the condition of the autoclave after the polymerization was
15 observed. No adhesion of polymers to the autoclave wall or impeller was found.

[0293]

It should be noted that in this autoclave system, 14.00 mg of Chemistat 2500 and 7.00 mg of diethylaluminum ethoxide
20 were present.

[0294]

[Example 26-2]

<Polymerization method (2): Evaluation of polymerization activity>

25 Into a 1000 ml stainless steel autoclave thoroughly

purged with nitrogen, 500 ml of n-heptane was charged, the system was purged with ethylene, and 5 ml of 1-hexene and 0.06 ml (0.06 mmol) of 1 mol/L triisobutylaluminum were added. After the mixture was retained at room temperature for 5 minutes, 2 ml of the antistatic agent composition 11 prepared in Preparation Example 17 and 0.15 g of the solid catalyst component (vi) (A) prepared in Preparation Example 15 were added thereto and the temperature in the system was elevated to 73°C. Ethylene was then introduced to start polymerization. While continuously supplying ethylene so that the pressure was maintained at 8.0 kg/cm²-G, polymerization was conducted for 90 minutes. After termination of the polymerization, the system was depressurized and the polymer was filtered, washed, and dried under vacuum at 80°C for 12 hours. As a result, 173.2 g of the polymer was obtained. The activity ratio was 254% relative to 100% in Comparative Example 13-2.

[0295]

It should be noted that in this autoclave system, 14.00 mg of Chemistat 2500 and 7.00 mg of diethylaluminum ethoxide were present.

[0296]

[Comparative Example 15-1]

Case of adding only component (B) during polymerization

<Polymerization method (1): Evaluation of condition of

autoclave wall>

Into a 1000 ml stainless steel autoclave thoroughly
purged with nitrogen, 500 ml of n-heptane was charged, the
system was purged with ethylene, 20 ml of 1-hexene and 0.27 g
5 of the prepolymerized solid catalyst component (iii) ((A)-a)
were charged, and the temperature was elevated to 55°C. Then
1.72 ml of a toluene solution (4.06 mg/ ml) of Chemistat 2500
(higher aliphatic amide produced by Sanyo Chemicals
Industries, Ltd.) acting as the component (B) and 0.43 g of
10 the solid catalyst component (iii) ((A)-b) prepared in
Preparation Example 2 were added, and the temperature in the
system was elevated to 73°C. Ethylene was then introduced to
start polymerization. While continuously supplying ethylene
so that the pressure was maintained at 8.0 kg/cm²-G,
15 polymerization was conducted for 90 minutes. After the
termination of the polymerization, the system was
depressurized, the polymer was removed, and the condition of
the autoclave after the polymerization was observed. No
adhesion of polymers to the autoclave wall or impeller was
20 found.

[0297]

It should be noted that in this autoclave system, 7.00
mg of Chemistat 2500 was present.

[0298]

25 [Comparative Example 15-2]

<Polymerization method (2): Evaluation of polymerization activity>

Into a 1000 ml stainless steel autoclave thoroughly
purged with nitrogen, 500 ml of n-heptane was charged, the
5 system was purged with ethylene, and 20 ml of 1-hexene and
0.06 ml (0.06 mmol) of 1 mol/L triisobutylaluminum were added.
After the mixture was retained at room temperature for 5
minutes, 1.72 ml of a toluene solution (4.06 mg/ ml) of
Chemistat 2500 (higher aliphatic amide produced by Sanyo
10 Chemicals Industries, Ltd.) acting as the component (B) and
0.41 g of the prepolymerized solid catalyst component (iii)
(A) were added thereto and the temperature in the system was
elevated to 73°C. Ethylene was then introduced to start
polymerization. While continuously supplying ethylene so
15 that the pressure was maintained at 8.0 kg/cm²-G,
polymerization was conducted for 90 minutes. After
termination of the polymerization, the system was
depressurized and the polymer was filtered, washed, and dried
under vacuum at 80°C for 12 hours. The activity ratio of the
20 polymer obtained was 92% relative to 100% in Comparative
Example 13-2.

[0299]

It should be noted that in this autoclave system, 7.00
mg of Chemistat 2500 was present.

25 [0300]

[Example 27-1]

Case of adding a mixed solution of components (B) and (C)
during polymerization

<Polymerization method (1): Evaluation of condition of
5 autoclave wall>

Into a 1000 ml stainless steel autoclave thoroughly
purged with nitrogen, 500 ml of n-heptane was charged, the
system was purged with ethylene, 20 ml of 1-hexene and 0.28 g
of the prepolymerized solid catalyst component (iii) ((A)-a)
10 were charged, and the temperature was elevated to 55°C. It
takes approximately 10 minutes until the temperature reaches
55°C after the addition of ((A)-a). Then 1 ml of the
antistatic agent composition 13 prepared in Preparation
Example 19 and 0.40 g of the prepolymerized solid catalyst
15 component (iii) ((A)-b) were added, and the temperature in
the system was elevated to 73°C. Ethylene was then
introduced to start polymerization. While continuously
supplying ethylene so that the pressure was maintained at 8.0
kg/cm²-G, polymerization was conducted for 90 minutes. After
20 the termination of the polymerization, the system was
depressurized, the polymer was removed, and the condition of
the autoclave after the polymerization was observed. No
adhesion of polymers to the autoclave wall or impeller was
found.

25 [0301]

It should be noted that in this autoclave system, 7.00 mg of Chemistat 2500 and 3.50 mg of diisobutylaluminum hydride were present.

[0302]

5 [Example 27-2]

<Polymerization method (2): Evaluation of polymerization activity>

Into a 1000 ml stainless steel autoclave thoroughly purged with nitrogen, 500 ml of n-heptane was charged, the
10 system was purged with ethylene, and 20 ml of 1-hexene and 0.06 ml (0.06 mmol) of 1 mol/L triisobutylaluminum were added. After the mixture was retained at room temperature for 5 minutes, 1 ml of the antistatic agent composition 13 prepared in Preparation Example 19 and 0.32 g of the prepolymerized
15 solid catalyst component (iii) (A) were added thereto and the temperature in the system was elevated to 73°C. Ethylene was then introduced to start polymerization. While continuously supplying ethylene so that the pressure was maintained at 8.0 kg/cm²-G, polymerization was conducted for 90 minutes. After
20 termination of the polymerization, the system was depressurized and the polymer was filtered, washed, and dried under vacuum at 80°C for 12 hours. The activity ratio of the polymer obtained was 117% relative to 100% in Comparative Example 15-2.

25 [0303]

It should be noted that in this autoclave system, 7.00 mg of Chemistat 2500 and 3.50 mg of diisobutylaluminum hydride were present.

[0304]

5 [Example 28-1]

Case of adding a mixed solution of components (B) and (C) during polymerization

<Polymerization method (1): Evaluation of condition of autoclave wall>

10 Into a 1000 ml stainless steel autoclave thoroughly
purged with nitrogen, 500 ml of n-heptane was charged, the
system was purged with ethylene, 20 ml of 1-hexene and 0.27 g
of the prepolymerized solid catalyst component (iii) ((A)-a)
were charged, and the temperature was elevated to 55°C. It
15 takes approximately 10 minutes until the temperature reaches
55°C after the addition of ((A)-a). Then 1 ml of the
antistatic agent composition 15 prepared in Preparation
Example 21 and 0.43 g of the prepolymerized solid catalyst
component (iii) ((A)-b) were added, and the temperature in
20 the system was elevated to 73°C. Ethylene was then
introduced to start polymerization. While continuously
supplying ethylene so that the pressure was maintained at 8.0
kg/cm²-G, polymerization was conducted for 90 minutes. After
the termination of the polymerization, the system was
25 depressurized, the polymer was removed, and the condition of

the autoclave after the polymerization was observed. No adhesion of polymers to the autoclave wall or impeller was found.

[0305]

5 It should be noted that in this autoclave system, 7.00 mg of Chemistat 2500 and 5.78 mg of diisobutylaluminum hydride were present.

[0306]

[Example 28-2]

10 <Polymerization method (2): Evaluation of polymerization activity>

 Into a 1000 ml stainless steel autoclave thoroughly purged with nitrogen, 500 ml of n-heptane was charged, the system was purged with ethylene, and 20 ml of 1-hexene and
15 0.06 ml (0.06 mmol) of 1 mol/L triisobutylaluminum were added. After the mixture was retained at room temperature for 5 minutes, 1 ml of the antistatic agent composition 15 prepared in Preparation Example 21 and 0.42 g of the prepolymerized solid catalyst component (iii) (A) were added thereto and the
20 temperature in the system was elevated to 73°C. Ethylene was then introduced to start polymerization. While continuously supplying ethylene so that the pressure was maintained at 8.0 kg/cm²-G, polymerization was conducted for 90 minutes. After termination of the polymerization, the system was
25 depressurized and the polymer was filtered, washed, and dried

under vacuum at 80°C for 12 hours. The activity ratio of the polymer obtained was 117% relative to 100% in Comparative Example 15-2.

[0307]

5 It should be noted that in this autoclave system, 7.00 mg of Chemistat 2500 and 5.78 mg of diisobutylaluminum hydride were present.

[0308]

[Example 29-1]

10 Case of adding a mixed solution of components (B) and (C) during polymerization

<Polymerization method (1): Evaluation of condition of autoclave wall>

15 Into a 1000 ml stainless steel autoclave thoroughly purged with nitrogen, 500 ml of n-heptane was charged, the system was purged with ethylene, 20 ml of 1-hexene and 0.33 g of the prepolymerized solid catalyst component (iii) ((A)-a) prepared in Preparation Example 2 were charged, and the temperature was elevated to 55°C. It takes approximately 10
20 minutes until the temperature reaches 55°C after the addition of ((A)-a). Then 1 ml of the antistatic agent composition 16 prepared in Preparation Example 22 and 0.46 g of the prepolymerized solid catalyst component (iii) ((A)-b) were added, and the temperature in the system was elevated to 73°C.
25 Ethylene was then introduced to start polymerization. While

continuously supplying ethylene so that the pressure was maintained at 8.0 kg/cm²-G, polymerization was conducted for 90 minutes. After the termination of the polymerization, the system was depressurized, the polymer was removed, and the
5 condition of the autoclave after the polymerization was observed. No adhesion of polymers to the autoclave wall or impeller was found.

[0309]

It should be noted that in this autoclave system, 7.00
10 mg of Chemistat 2500 and 3.50 mg of triethylaluminum were present.

[0310]

[Example 29-2]

<Polymerization method (2): Evaluation of polymerization
15 activity>

Into a 1000 ml stainless steel autoclave thoroughly purged with nitrogen, 500 ml of n-heptane was charged, the system was purged with ethylene, and 20 ml of 1-hexene and 0.06 ml (0.06 mmol) of 1 mol/L triisobutylaluminum were added.
20 After the mixture was retained at room temperature for 5 minutes, 1 ml of the antistatic agent composition 16 prepared in Preparation Example 22 and 0.42 g of the prepolymerized solid catalyst component (iii) (A) were added thereto and the temperature in the system was elevated to 73°C. Ethylene was
25 then introduced to start polymerization. While continuously

supplying ethylene so that the pressure was maintained at 8.0 kg/cm²-G, polymerization was conducted for 90 minutes. After termination of the polymerization, the system was depressurized and the polymer was filtered, washed, and dried
5 under vacuum at 80°C for 12 hours. The activity ratio of the polymer obtained was 113% relative to 100% in Comparative Example 15-2.

[0311]

It should be noted that in this autoclave system, 7.00
10 mg of Chemistat 2500 and 3.50 mg of triethylaluminum were present.

[0312]

[Example 30-1]

Case of adding a mixed solution of components (B) and (C)
15 during polymerization

<Polymerization method (1): Evaluation of condition of autoclave wall>

Into a 1000 ml stainless steel autoclave thoroughly
purged with nitrogen, 500 ml of n-heptane was charged, the
20 system was purged with ethylene, 20 ml of 1-hexene and 0.25 g
of the prepolymerized solid catalyst component (iii) ((A)-a)
were charged, and the temperature was elevated to 55°C. It
takes approximately 10 minutes until the temperature reaches
55°C after the addition of ((A)-a). Then 1 ml of the
25 antistatic agent composition 17 prepared in Preparation

Example 23 and 0.42 g of the prepolymerized solid catalyst component (iii) ((A)-b) prepared in Preparation Example 2 were added, and the temperature in the system was elevated to 73°C. Ethylene was then introduced to start polymerization.

5 While continuously supplying ethylene so that the pressure was maintained at 8.0 kg/cm²-G, polymerization was conducted for 90 minutes. After the termination of the polymerization, the system was depressurized, the polymer was removed, and the condition of the autoclave after the polymerization was

10 observed. No adhesion of polymers to the autoclave wall or impeller was found.

[0313]

It should be noted that in this autoclave system, 7.00 mg of Chemistat 2500 and 4.67 mg of triethylaluminum were

15 present.

[0314]

[Example 30-2]

<Polymerization method (2): Evaluation of polymerization activity>

20 Into a 1000 ml stainless steel autoclave thoroughly purged with nitrogen, 500 ml of n-heptane was charged, the system was purged with ethylene, and 20 ml of 1-hexene and 0.06 ml (0.06 mmol) of 1 mol/L triisobutylaluminum were added. After the mixture was retained at room temperature for 5

25 minutes, 1 ml of the antistatic agent composition 16 prepared

in Preparation Example 22 and 0.43 g of the prepolymerized solid catalyst component (iii) (A) were added thereto and the temperature in the system was elevated to 73°C. Ethylene was then introduced to start polymerization. While continuously
5 supplying ethylene so that the pressure was maintained at 8.0 kg/cm²-G, polymerization was conducted for 90 minutes. After termination of the polymerization, the system was depressurized and the polymer was filtered, washed, and dried under vacuum at 80°C for 12 hours. The activity ratio of the
10 polymer obtained was 112% relative to 100% in Comparative Example 15-2.

[0315]

It should be noted that in this autoclave system, 7.00 mg of Chemistat 2500 and 4.67 mg of triethylaluminum were
15 present.

[0316]

[Example 31-1]

Case of adding a mixed solution of components (B) and (C) during polymerization

20 <Polymerization method (1): Evaluation of condition of autoclave wall>

Into a 1000 ml stainless steel autoclave thoroughly purged with nitrogen, 500 ml of n-heptane was charged, the system was purged with ethylene, 20 ml of 1-hexene and 0.30 g
25 of the prepolymerized solid catalyst component (iii) ((A)-a)

prepared in Preparation Example 2 were charged, and the temperature was elevated to 55°C. It takes approximately 10 minutes until the temperature reaches 55°C after the addition of ((A)-a). Then 1 ml of the antistatic agent composition 14 prepared in Preparation Example 20 and 0.40 g of the prepolymerized solid catalyst component (iii) ((A)-b) were added, and the temperature in the system was elevated to 73°C. Ethylene was then introduced to start polymerization. While continuously supplying ethylene so that the pressure was maintained at 8.0 kg/cm²-G, polymerization was conducted for 90 minutes. After the termination of the polymerization, the system was depressurized, the polymer was removed, and the condition of the autoclave after the polymerization was observed. No adhesion of polymers to the autoclave wall or impeller was found.

[0317]

It should be noted that in this autoclave system, 7.00 mg of Chemistat 2500 and 8.75 mg of diisobutylaluminum hydride were present.

[0318]

[Example 31-2]

<Polymerization method (2): Evaluation of polymerization activity>

Into a 1000 ml stainless steel autoclave thoroughly purged with nitrogen, 500 ml of n-heptane was charged, the

system was purged with ethylene, and 20 ml of 1-hexene and 0.06 ml (0.06 mmol) of 1 mol/L triisobutylaluminum were added. After the mixture was retained at room temperature for 5 minutes, 1 ml of the antistatic agent composition 14 prepared in Preparation Example 20 and 0.45 g of the prepolymerized solid catalyst component (iii) (A) were added thereto and the temperature in the system was elevated to 73°C. Ethylene was then introduced to start polymerization. While continuously supplying ethylene so that the pressure was maintained at 8.0 kg/cm²-G, polymerization was conducted for 90 minutes. After termination of the polymerization, the system was depressurized and the polymer was filtered, washed, and dried under vacuum at 80°C for 12 hours. The activity ratio of the polymer obtained was 113% relative to 100% in Comparative Example 15-2.

[0319]

It should be noted that in this autoclave system, 7.00 mg of Chemistat 2500 and 8.75 mg of diisobutylaluminum hydride were present.

20 [0320]

[Example 32-1]

Case of adding a mixed solution of components (B) and (C) during polymerization

<Polymerization method (1): Evaluation of condition of autoclave wall>

Into a 1000 ml stainless steel autoclave thoroughly
purged with nitrogen, 500 ml of n-heptane was charged, the
system was purged with ethylene, 20 ml of 1-hexene and 0.30 g
of the prepolymerized solid catalyst component (iii) ((A)-a)
5 prepared in Preparation Example 2 were charged, and the
temperature was elevated to 55°C. It takes approximately 10
minutes until the temperature reaches 55°C after the addition
of ((A)-a). Then 1 ml of the antistatic agent composition 18
prepared in Preparation Example 24 and 0.40 g of the
10 prepolymerized solid catalyst component (iii) ((A)-b) were
added, and the temperature in the system was elevated to 73°C.
Ethylene was then introduced to start polymerization. While
continuously supplying ethylene so that the pressure was
maintained at 8.0 kg/cm²-G, polymerization was conducted for
15 90 minutes. After the termination of the polymerization, the
system was depressurized, the polymer was removed, and the
condition of the autoclave after the polymerization was
observed. No adhesion of polymers to the autoclave wall or
impeller was found.

20 [0321]

It should be noted that in this autoclave system, 7.00
mg of Chemistat 2500 and 3.50 mg of tri-normal-hexylaluminum
were present.

[0322]

25 [Example 32-2]

<Polymerization method (2): Evaluation of polymerization activity>

Into a 1000 ml stainless steel autoclave thoroughly purged with nitrogen, 500 ml of n-heptane was charged, the system was purged with ethylene, and 20 ml of 1-hexene and 0.06 ml (0.06 mmol) of 1 mol/L triisobutylaluminum were added. After the mixture was retained at room temperature for 5 minutes, 1 ml of the antistatic agent composition 18 prepared in Preparation Example 24 and 0.43 g of the prepolymerized solid catalyst component (iii) (A) were added thereto and the temperature in the system was elevated to 73°C. Ethylene was then introduced to start polymerization. While continuously supplying ethylene so that the pressure was maintained at 8.0 kg/cm²-G, polymerization was conducted for 90 minutes. After termination of the polymerization, the system was depressurized and the polymer was filtered, washed, and dried under vacuum at 80°C for 12 hours. The activity ratio of the polymer obtained was 133% relative to 100% in Comparative Example 15-2.

[0323]

It should be noted that in this autoclave system, 7.00 mg of Chemistat 2500 and 3.50 mg of tri-normal-hexylaluminum were present.

[0324]

[Example 33-1]

Case of adding a mixed solution of components (B) and (C)
during polymerization

<Polymerization method (1): Evaluation of condition of
autoclave wall>

5 Into a 1000 ml stainless steel autoclave thoroughly
purged with nitrogen, 500 ml of n-heptane was charged, the
system was purged with ethylene, 20 ml of 1-hexene and 0.30 g
of the prepolymerized solid catalyst component (iii) ((A)-a)
were charged, and the temperature was elevated to 55°C. It
10 takes approximately 10 minutes until the temperature reaches
55°C after the addition of ((A)-a). Then 1 ml of the
antistatic agent composition 11 prepared in Preparation
Example 17 and 0.40 g of the prepolymerized solid catalyst
component (vii) ((A)-b) prepared in Preparation Example 16
15 were added, and the temperature in the system was elevated to
73°C. Ethylene was then introduced to start polymerization.
While continuously supplying ethylene so that the pressure
was maintained at 8.0 kg/cm²-G, polymerization was conducted
for 90 minutes. After the termination of the polymerization,
20 the system was depressurized, the polymer was removed, and
the condition of the autoclave after the polymerization was
observed. No adhesion of polymers to the autoclave wall or
impeller was found.

[0325]

25 It should be noted that in this autoclave system, 7.00

mg of Chemistat 2500 and 3.50 mg of diethylaluminum ethoxide were present.

[0326]

[Example 33-2]

5 <Polymerization method (2): Evaluation of polymerization activity>

Into a 1000 ml stainless steel autoclave thoroughly purged with nitrogen, 500 ml of n-heptane was charged, the system was purged with ethylene, and 20 ml of 1-hexene and
10 0.06 ml (0.06 mmol) of 1 mol/L triisobutylaluminum were added. After the mixture was retained at room temperature for 5 minutes, 1 ml of the antistatic agent composition 11 prepared in Preparation Example 17 and 0.35 g of the prepolymerized solid catalyst component (vii) (A) prepared in Preparation
15 Example 16 were added thereto and the temperature in the system was elevated to 73°C. Ethylene was then introduced to start polymerization. While continuously supplying ethylene so that the pressure was maintained at 8.0 kg/cm²-G, polymerization was conducted for 90 minutes. After
20 termination of the polymerization, the system was depressurized and the polymer was filtered, washed, and dried under vacuum at 80°C for 12 hours. The activity ratio of the polymer obtained was 129% relative to 100% in the case where no component (C) was used.

25 [0327]

It should be noted that in this autoclave system, 7.00 mg of Chemistat 2500 and 3.50 mg of diethylaluminum ethoxide were present.

[0328]

5 [Comparative Example 16]

Case of adding a mixed solution of components (B) and (C) during polymerization

<Polymerization method (2): Evaluation of polymerization activity>

10 Into a 1000 ml stainless steel autoclave thoroughly purged with nitrogen, 500 ml of n-heptane was charged, the system was purged with ethylene, and 20 ml of 1-hexene and 0.06 ml (0.06 mmol) of 1 mol/L triisobutylaluminum were added. After the mixture was retained at room temperature for 5
15 minutes, 1 ml of the antistatic agent composition 19 prepared in Preparation Example 25 and 0.43 g of the prepolymerized solid catalyst component (iii) (A) were added thereto and the temperature in the system was elevated to 73°C. Ethylene was then introduced to start polymerization. While continuously
20 supplying ethylene so that the pressure was maintained at 8.0 kg/cm²-G, polymerization was conducted for 90 minutes. After termination of the polymerization, the system was depressurized and the polymer was filtered, washed, and dried under vacuum at 80°C for 12 hours. The activity ratio of the
25 polymer obtained was 91% relative to 100% in the case where

no component (C) was used.

[0329]

It should be noted that in this autoclave system, 7.00 mg of AMIET 105 and 3.50 mg of diethylaluminum ethoxide were
5 present.

[0330]

[Comparative Example 17]

Case of adding a mixed solution of components (B) and (C)
during polymerization

10 <Polymerization method (2): Evaluation of polymerization activity>

Into a 1000 ml stainless steel autoclave thoroughly purged with nitrogen, 500 ml of n-heptane was charged, the system was purged with ethylene, and 20 ml of 1-hexene and
15 0.06 ml (0.06 mmol) of 1 mol/L triisobutylaluminum were added. After the mixture was retained at room temperature for 5 minutes, 1 ml of the antistatic agent composition 20 prepared in Preparation Example 26 and 0.45 g of the prepolymerized solid catalyst component (iii) (A) were added thereto and the
20 temperature in the system was elevated to 73°C. Ethylene was then introduced to start polymerization. While continuously supplying ethylene so that the pressure was maintained at 8.0 kg/cm²-G, polymerization was conducted for 90 minutes. After termination of the polymerization, the system was
25 depressurized and the polymer was filtered, washed, and dried

under vacuum at 80°C for 12 hours. The activity ratio of the polymer obtained was 95% relative to 100% in the case where no component (C) was used.

[0331]

5 It should be noted that in this autoclave system, 14.00 mg of EPAN 720 and 3.50 mg of diethylaluminum ethoxide were present.

[0332]

[Comparative Example 18]

10 Case of adding a mixed solution of components (B) and (C) during polymerization

<Polymerization method (2): Evaluation of polymerization activity>

15 Into a 1000 ml stainless steel autoclave thoroughly purged with nitrogen, 500 ml of n-heptane was charged, the system was purged with ethylene, and 20 ml of 1-hexene and 0.06 ml (0.06 mmol) of 1 mol/L triisobutylaluminum were added. After the mixture was retained at room temperature for 5 minutes, 1 ml of the antistatic agent composition 21 prepared
20 in Preparation Example 27 and 0.48 g of the prepolymerized solid catalyst component (iii) (A) were added thereto and the temperature in the system was elevated to 73°C. Ethylene was then introduced to start polymerization. While continuously supplying ethylene so that the pressure was maintained at 8.0
25 kg/cm²-G, polymerization was conducted for 90 minutes. After

termination of the polymerization, the system was depressurized and the polymer was filtered, washed, and dried under vacuum at 80°C for 12 hours. The activity ratio of the polymer obtained was 85% relative to 100% in the case where
5 no component (C) was used.

[0333]

It should be noted that in this autoclave system, 7.00 mg of EMULGEN 108 and 3.50 mg of diethylaluminum ethoxide were present.

10 [0334]

[Comparative Example 19]

Case of adding a mixed solution of components (B) and (C)
during polymerization

<Polymerization method (2): Evaluation of polymerization
15 activity>

Into a 1000 ml stainless steel autoclave thoroughly purged with nitrogen, 500 ml of n-heptane was charged, the system was purged with ethylene, and 20 ml of 1-hexene and 0.06 ml (0.06 mmol) of 1 mol/L triisobutylaluminum were added.
20 After the mixture was retained at room temperature for 5 minutes, 1 ml of the antistatic agent composition 22 prepared in Preparation Example 28 and 0.47 g of the prepolymerized solid catalyst component (iii) (A) were added thereto and the temperature in the system was elevated to 73°C. Ethylene was
25 then introduced to start polymerization. While continuously

supplying ethylene so that the pressure was maintained at 8.0 kg/cm²-G, polymerization was conducted for 90 minutes. After termination of the polymerization, the system was depressurized and the polymer was filtered, washed, and dried
5 under vacuum at 80°C for 12 hours. The activity ratio of the polymer obtained was 78% relative to 100% in the case where no component (C) was used.

[0335]

It should be noted that in this autoclave system, 7.00
10 mg of Electro-stripper EA and 3.50 mg of diethylaluminum ethoxide were present.

[0336]

[Comparative Example 20]

Case of adding a mixed solution of components (B) and (C)
15 during polymerization

<Polymerization method (2): Evaluation of polymerization activity>

Into a 1000 ml stainless steel autoclave thoroughly purged with nitrogen, 500 ml of n-heptane was charged, the
20 system was purged with ethylene, and 20 ml of 1-hexene and 0.06 ml (0.06 mmol) of 1 mol/L triisobutylaluminum were added. After the mixture was retained at room temperature for 5 minutes, 1 ml of the antistatic agent composition 23 prepared in Preparation Example 29 and 0.40 g of the prepolymerized
25 solid catalyst component (iii) (A) were added thereto and the

temperature in the system was elevated to 73°C. Ethylene was then introduced to start polymerization. While continuously supplying ethylene so that the pressure was maintained at 8.0 kg/cm²-G, polymerization was conducted for 90 minutes. After
5 termination of the polymerization, the system was depressurized and the polymer was filtered, washed, and dried under vacuum at 80°C for 12 hours. The activity ratio of the polymer obtained was 94% relative to 100% in the case where no component (C) was used.

10 [0337]

It should be noted that in this autoclave system, 7.00 mg of Electro-stripper EA7 and 3.50 mg of diethylaluminum ethoxide were present.

[0338]

15 [Comparative Example 21]

Case of adding a mixed solution of components (B) and (C)
during polymerization

<Polymerization method (2): Evaluation of polymerization activity>

20 Into a 1000 ml stainless steel autoclave thoroughly purged with nitrogen, 500 ml of n-heptane was charged, the system was purged with ethylene, and 20 ml of 1-hexene and 0.06 ml (0.06 mmol) of 1 mol/L triisobutylaluminum were added. After the mixture was retained at room temperature for 5
25 minutes, 1 ml of the antistatic agent composition 24 prepared

in Preparation Example 30 and 0.45 g of the prepolymerized solid catalyst component (iii) (A) were added thereto and the temperature in the system was elevated to 73°C. Ethylene was then introduced to start polymerization. While continuously
5 supplying ethylene so that the pressure was maintained at 8.0 kg/cm²-G, polymerization was conducted for 90 minutes. After termination of the polymerization, the system was depressurized and the polymer was filtered, washed, and dried under vacuum at 80°C for 12 hours. The activity ratio of the
10 polymer obtained was 92% relative to 100% in the case where no component (C) was used.

[0339]

It should be noted that in this autoclave system, 7.00 mg of Costelan AS100 and 3.50 mg of diethylaluminum ethoxide
15 were present.

[0340]

[Comparative Example 22]

Case of adding a mixed solution of components (B) and (C) during polymerization

20 <Polymerization method (2): Evaluation of polymerization activity>

Into a 1000 ml stainless steel autoclave thoroughly purged with nitrogen, 500 ml of n-heptane was charged, the system was purged with ethylene, and 20 ml of 1-hexene and
25 0.06 ml (0.06 mmol) of 1 mol/L triisobutylaluminum were added.

After the mixture was retained at room temperature for 5 minutes, 1 ml of the antistatic agent composition 25 prepared in Preparation Example 31 and 0.53 g of the prepolymerized solid catalyst component (iii) (A) were added thereto and the temperature in the system was elevated to 73°C. Ethylene was then introduced to start polymerization. While continuously supplying ethylene so that the pressure was maintained at 8.0 kg/cm²-G, polymerization was conducted for 90 minutes. After termination of the polymerization, the system was depressurized and the polymer was filtered, washed, and dried under vacuum at 80°C for 12 hours. The activity ratio of the polymer obtained was 96% relative to 100% in the case where no component (C) was used.

[0341]

It should be noted that in this autoclave system, 7.00 mg of Costelan AS100 and 3.50 mg of tri-normal-hexylaluminum were present.

[0342]

Table 1 shows the summary of the evaluation of the condition of the autoclave wall evaluated through the polymerization method (1) in Examples 1-1 to 9-1 and Comparative Examples 1, 2-1, and 3-1.

[0343]

Table 2 shows the summary of the evaluation of the polymerization activity evaluated through the polymerization

method (2) in Examples 1-2 to 9-2 and Comparative Examples 2-2 and 3-2.

[0344]

Table 3 shows the summary of the evaluation of the
5 condition of the autoclave wall evaluated through the polymerization method (1) in Examples 10-1 to 12-1 and Comparative Example 4-1.

[0345]

Table 4 shows the summary of the evaluation of the
10 polymerization activity evaluated through the polymerization method (2) in Examples 10-2 to 12-2 and Comparative Example 4-2.

[0346]

Table 5 shows the summary of the evaluation of the
15 operability for gas-phase polymerization in Example 13 and Comparative Examples 5 and 6.

[0347]

Table 6 shows the summary of the evaluation of the
condition of the autoclave wall evaluated through the
20 polymerization method (1) in Examples 14-1 to 26-1 and Comparative Examples 7-1 to 14.

[0348]

Table 7 shows the summary of the evaluation of the
polymerization activity evaluated through the polymerization
25 method (2) in Examples 14-2 to 26-2 and Comparative Examples

7-2 to 13-2.

[0349]

Table 8 shows the summary of the evaluation of the condition of the autoclave wall evaluated through the polymerization method (1) in Examples 27-1 to 33-1 and Comparative Example 15-1.

[0350]

Table 9 shows the summary of the evaluation of the polymerization activity evaluated through the polymerization method (2) in Examples 27-2 to 33-2 and Comparative Example 15-2.

[0351]

Table 10 shows the summary of the evaluation of the polymerization activity evaluated through the polymerization method (2) in Comparative Examples 16 to 22.

[0352]

[Table 1]

Table 1 Polymerization method (1) Evaluation of condition of autoclave wall

	Catalyst (A-a) g	Catalyst (A-b) g	Component (B)	Component (C)	Components (B)+(C) Charge method	Mixed solution of (B) and (C)	
						Component (B) mg	Component (C) mg
Example 1-1	0.58	0.61	Chemistat 2500	$\text{Et}_2\text{Al}(\text{OEt})^{*1}$	Method (1) ^{*3}	9.0	6.0
Comparative Example 1	0.64	0.61	None	None	-	0.0	0.0
Comparative Example 2-1	0.62	0.68	Chemistat 2500	None	-	0.0	0.0
Example 2-1	0.65	0.68	Chemistat 2500	$\text{Et}_2\text{Al}(\text{OEt})^{*1}$	Method (1) ^{*3}	9.0	3.0
Example 3-1	0.59	0.58	Chemistat 2500	$\text{Et}_2\text{Al}(\text{OEt})^{*1}$	Method (1) ^{*3}	9.0	9.0
Example 4-1	0.60	0.60	Chemistat 2500	$\text{Et}_2\text{Al}(\text{OEt})^{*1}$	Method (1) ^{*3}	9.0	1.5
Example 5-1	0.60	0.60	Chemistat 2500	$\text{Et}_2\text{Al}(\text{OEt})^{*1}$	Method (1) ^{*3}	9.0	10.5
Example 6-1	0.60	0.60	Chemistat 2500	$\text{Et}_2\text{Al}(\text{OEt})^{*1}$	Method (1) ^{*3}	9.0	12.0
Example 7-1	0.60	0.60	Chemistat 2500	$\text{Et}_2\text{Al}(\text{OEt})^{*1}$	Method (1) ^{*3}	9.0	18.0
Example 8-1	0.60	0.60	Chemistat 2500	$\text{Et}_2\text{Al}(\text{OEt})^{*1}$	Method (1) ^{*3}	12.0	6.0
Comparative Example 3-1	0.68	0.54	Chemistat 2500	None	-	0.0	0.0
Example 9-1	0.60	0.60	Chemistat 2500	$\text{iBu}_3\text{Al}^{*2}$	Method (1) ^{*3}	9.0	12.0

	Separately charged amount		(B)+(C) mixing ratio		Adhesion to wall ^{*6}	Component (C)/(B) (Molar ratio)
	Component (B) mg	Component (C) mg	Component (B) mg	Component (C) mg		
Example 1-1	0.0	0.0	9.0	6.0	A	1.47
Comparative Example 1	0.0	0.0	0.0	0.0	C	-
Comparative Example 2-1	9.0	0.0	9.0	0.0	B	-
Example 2-1	0.0	0.0	9.0	3.0	A	0.73
Example 3-1	0.0	0.0	9.0	9.0	A	2.20
Example 4-1	0.0	0.0	9.0	1.5	A	0.37
Example 5-1	0.0	0.0	9.0	10.5	A	2.57
Example 6-1	0.0	0.0	9.0	12.0	A	2.94
Example 7-1	0.0	0.0	9.0	18.0	A	4.41
Example 8-1	0.0	0.0	12.0	6.0	A	1.10
Comparative Example 3-1	24.0	0.0	24.0	0.0	A	-
Example 9-1	0.0	0.0	9.0	12.0	A	1.93

*1: $\text{Et}_2\text{Al}(\text{OEt})$ = Diethylaluminum ethoxide*2: iBu_3Al = Triisobutylaluminum

*3: Method (1) = Components (B) and (C) were pre-mixed and charged into the polymerization vessel.

*6: A = No adhesion of polymers to the autoclave wall or impeller was observed.

B = Slight adhesion of polymers to the autoclave wall or impeller was observed.

C = Extensive adhesion of polymers to the autoclave wall or impeller was observed.

[0353]

[Table 2]

Table 2 Polymerization method (2) Evaluation of polymerization activity

	Catalyst (A) g	Component (B)	Component (C)	(B)+(C)	Charged amount of (B)+(C) mixture		Separately Charged Amount		(B)+(C) mixing ratio (in the polymerization vessel)		Yield g	Mileage g-PE/g- cat	Component (C)/(B) molar ratio
				Charge method	Component (B) mg	Component (C) mg	Component (B) mg	Component (C) mg	Component (B) mg	Component (C) mg			
Example 1-2	0.40	Chemistat 2500	Et ₂ Al(OEt) ^{*1}	Method (1) ^{*3}	5.25	3.50	0	0	5.25	3.50	152.5	381	1.47
Comparative Example 2-2	0.40	Chemistat 2500	None	-	0	0	5.25		5.25	0.00	129.6	324	0.00
Example 2-2	0.40	Chemistat 2500	Et ₂ Al(OEt) ^{*1}	Method (1) ^{*3}	5.25	1.75	0	0	5.25	1.75	146.5	366	0.73
Example 3-2	0.40	Chemistat 2500	Et ₂ Al(OEt) ^{*1}	Method (1) ^{*3}	5.25	5.25	0	0	5.25	5.25	142.5	356	2.20
Example 4-2	0.40	Chemistat 2500	Et ₂ Al(OEt) ^{*1}	Method (1) ^{*3}	5.25	0.88	0	0	5.25	0.88	141.2	353	0.37
Example 5-2	0.40	Chemistat 2500	Et ₂ Al(OEt) ^{*1}	Method (1) ^{*3}	5.25	6.13	0	0	5.25	6.13	122.4	306	2.57
Example 6-2	0.40	Chemistat 2500	Et ₂ Al(OEt) ^{*1}	Method (1) ^{*3}	5.25	7.00	0	0	5.25	7.00	110.6	277	2.94
Example 7-2	0.40	Chemistat 2500	Et ₂ Al(OEt) ^{*1}	Method (1) ^{*3}	5.25	10.50	0	0	5.25	10.50	108.0	270	4.41
Example 8-2	0.40	Chemistat 2500	Et ₂ Al(OEt) ^{*1}	Method (1) ^{*3}	7.00	3.50	0	0	7.00	3.50	138.0	345	1.10
Comparative Example 3-2	0.40	Chemistat 2500	None	-	0	0	14.00	0	14.00	0.00	90.4	226	-
Example 9-2	0.40	Chemistat 2500	iBu ₃ Al ^{*2}	Method (1) ^{*3}	5.25	7.00	0	0	5.25	7.00	178.2	446	1.93

5

*1: Et₂Al(OEt) = Diethylaluminum ethoxide*2: iBu₃Al = Triisobutylaluminum

*3: Method (1) = Components (B) and (C) were pre-mixed and charged into the polymerization vessel.

[0354]

[Table 3]

Table 3 Polymerization method (1) Evaluation of condition of autoclave wall

	Catalyst (A-a) g	Catalyst (A-b) g	Component (B)	Component (C)	Components (B)+(C)	Mixed solution of (B) and (C)	
					Charge method	Component (B) mg	Component (C) mg
Example 10-1	0.65	0.68	Chemistat 2500	$\text{Et}_2\text{Al}(\text{OEt})^{*1}$	Method (1) ^{*3}	9.0	3.0
Example 11-1	-	0.60	Chemistat 2500	$\text{Et}_2\text{Al}(\text{OEt})^{*1}$	Method (2) ^{*4}	3.9	3.0
Example 12-1	-	0.60	Chemistat 2500	$\text{Et}_2\text{Al}(\text{OEt})^{*1}$	Method (3) ^{*5}	0.0	0.0
Comparative Example 4-1	0.60	0.60	Chemistat 2500	None	-	0.0	0.0

	Separately charged amount		(B)+(C) mixing ratio		Adhesion to wall ^{*6}	Component (C)/(B) (Molar ratio)
	Component (B) mg	Component (C) mg	Component (B) mg	Component (C) mg		
Example 10-1	0.0	0.0	9.0	3.0	A	0.73
Example 11-1	5.1	0.0	9.0	3.0	A	0.73
Example 12-1	9.0	3.0	9.0	3.0	A	0.73
Comparative Example 4-1	9.0	0.0	9.0	0.0	B	-

*1: $\text{Et}_2\text{Al}(\text{OEt})$ = Diethylaluminum ethoxide

*3: Method (1) = Components (B) and (C) were pre-mixed and charged into the polymerization vessel.

*4: Method (2) = A premixture of (B) and (C) and separate component (B) were sequentially charged into the polymerization vessel.

*5: Method (3) = Components (B) and (C) were separately and sequentially charged into the polymerization vessel.

*6: A = No adhesion of polymers to the autoclave wall or impeller was observed.

B = Slight adhesion of polymers to the autoclave wall or impeller was observed.

C = Extensive adhesion of polymers to the autoclave wall or impeller was observed.

[0355]

[Table 4]

Table 4 Polymerization method (2) Evaluation of polymerization activity (2)

	Catalyst (A) g	Component (B)	Component (C)	(B)+(C)	Charge amount of (B)+(C) mixture		Separately charged amount		(B)+(C) mixing ratio (in the polymerization vessel)		Yield g	Mileage g-PE /g-cat	Component (C)/(B) molar ratio
				Charge method	Component	Component	Component	Component	Component	Component			
					(B) mg	(C) mg	(B) mg	(C) mg	(B) mg	(C) mg			
Example 10-2	0.43	Chemistat 2500	Et ₂ Al(OEt) ^{*1}	Method (1) ^{*3}	5.25	1.75	0	0	5.25	1.75	147.1	341	0.73
Example 11-2	0.37	Chemistat 2500	Et ₂ Al(OEt) ^{*1}	Method (2) ^{*4}	2.27	1.75	2.98	0	5.25	1.75	119.2	323	0.73
Example 12-2	0.36	Chemistat 2500	Et ₂ Al(OEt) ^{*1}	Method (3) ^{*5}	0	0	5.25	1.75	5.25	1.75	104.4	287	0.73
Comparative Example 4-2	0.40	Chemistat 2500	None	-	0	0	5.25	0	5.25	0.00	115.8	287	-

5

*1: Et₂Al(OEt) = Diethylaluminum ethoxide

*3: Method (1) = Components (B) and (C) were pre-mixed and charged into the polymerization vessel.

*4: Method (2) = A premixture of (B) and (C) and separate component (B) were sequentially charged into the polymerization vessel.

*5: Method (3) = Components (B) and (C) were separately and sequentially charged into the polymerization vessel.

[0356]

[Table 5]

Table 5 Evaluation of operability by gas-phase polymerization

	Component (B)	Component (C)	Charged into polymerization system as a mixture α ^{*7}		Separately charged into polymerization system	Total charged amount ^{*8}	
			Component (B)	Component (C)	Component (B)	Component (B)	Component (C)
			Supply concentration (vs. production rate) ppm				
Example 13	Chemistat 2500	Et ₂ Al(OEt) ^{*1}	9	7	21	30	7
Comparative Example 5	Chemistat 2500	-	0	0	43	43	0
Comparative Example 6	Chemistat 2500	-	0	0	38	38	0

	Mileage	Stable operability ^{*9}
	(g-PE/g-cat·h·MPaG)	
Example 13	578	A
Comparative Example 5	510	A
Comparative Example 6	536	C

*1: Et₂Al(OEt) = Diethylaluminum ethoxide*7: Mixed solution α = A 9:7 (weight) mixture of Chemistat 2500 (component (B)) and diethylaluminum ethoxide (component I(C)).

*8: Total amount charged = A total amount of Chemistat charged as the mixture A and Chemistat charged separately.

*9: A = Stable operation was achieved

C = Stable operation was not achieved.

[0357]

[Table 6]

Table 6 Polymerization method (1) Evaluation of condition of autoclave wall

	Catalyst (A-a)		Catalyst (A-b)		Comonomer 1-hexene ml	Component (B)	Component (C)	(B)+(C) Charge method	(B)+(C) mixing ratio		Adhesion to wall*6	(C)/(B) weight ratio	(C)/(B) molar ratio
	Name	g	Name	g					Component (B) mg	Component (C) mg			
Comparative Example 7-1	(iii)	0.27	(i)	0.08	20	Chemistat 2500	None	-	24.50	0.00	C	0.00	0.00
Example 14-1	(iii)	0.28	(i)	0.08	20	Chemistat 2500	Et ₂ Al(OEt) ^{*1}	Method (1) ^{*3}	24.50	12.25	A	0.50	1.10
Example 15-1	(iii)	0.25	(i)	0.08	20	Chemistat 2500	Et ₂ Al(OEt) ^{*1}	Method (1) ^{*3}	24.50	16.35	A	0.67	1.47
Comparative Example 8-1	(i)	0.08	(i)	0.08	20	Chemistat 2500	None	-	28.00	0.00	C	0.00	0.00
Example 16	(iii)	0.28	(i)	0.08	20	Chemistat 2500	Et ₂ Al(OEt) ^{*1}	Method (1) ^{*3}	28.00	14.00	A	0.50	1.10
Example 17-1	(iii)	0.30	(i)	0.08	20	Chemistat 2500	Et ₂ Al(OEt) ^{*1}	Method (1) ^{*3}	28.00	18.68	A	0.67	1.47
Example 18-1	(i)	0.08	(i)	0.08	20	Chemistat 2500	Et ₂ Al(OEt) ^{*1}	Method (1) ^{*3}	28.00	14.00	A	0.50	1.10
Comparative Example 9	(iii)	0.24	(v)	0.15	5	Chemistat 2500	None	-	7.00	0.00	A	0.00	0.00
Comparative Example 10-1	(v)	0.15	(v)	0.15	5	Chemistat 2500	None	-	7.00	0.00	A	0.00	0.00
Example 19	(iii)	0.28	(v)	0.15	5	Chemistat 2500	Et ₂ Al(OEt) ^{*1}	Method (1) ^{*3}	7.00	3.50	A	0.50	1.10
Example 20-1	(v)	0.15	(v)	0.15	5	Chemistat 2500	Et ₂ Al(OEt) ^{*1}	Method (1) ^{*3}	7.00	3.50	A	0.50	1.10
Comparative Example 11-1	(i)	0.08	(i)	0.14	0	Chemistat 2500	None	-	21.00	0.00	A	0.00	0.00
Example 22-1	(i)	0.08	(i)	0.14	0	Chemistat 2500	Et ₂ Al(OEt) ^{*1}	Method (1) ^{*3}	21.00	14.00	A	0.67	1.47
Comparative Example 12-1	(v)	0.30	(v)	0.15	0	Chemistat 2500	None	-	14.00	0.00	A	0.00	0.00
Example 23-1	(v)	0.30	(v)	0.15	0	Chemistat 2500	Et ₂ Al(OEt) ^{*1}	Method (1) ^{*3}	14.00	7.00	A	0.50	1.10
Comparative Example 13-1	(vi)	0.15	(vi)	0.15	5	Chemistat 2500	None	-	28.00	0.00	C	0.00	0.00
Comparative Example 14	(vi)	0.15	(vi)	0.15	5	Chemistat 2500	None	-	42.00	0.00	C	0.00	0.00
Example 24-1	(vi)	0.15	(vi)	0.15	5	Chemistat 2500	Et ₂ Al(OEt) ^{*1}	Method (1) ^{*3}	28.00	14.00	A	0.50	1.10
Example 25-1	(vi)	0.15	(vi)	0.15	5	Chemistat 2500	Et ₂ Al(OEt) ^{*1}	Method (1) ^{*3}	28.00	18.68	A	0.67	1.47
Example 26-1	(vi)	0.15	(vi)	0.15	5	Chemistat 2500	Et ₂ Al(OEt) ^{*1}	Method (1) ^{*3}	14.00	7.00	A	0.50	1.10

*1: Et₂Al(OEt) = Diethylaluminum ethoxide

*3: Method (1) = Components (B) and (C) were pre-mixed and charged into the polymerization vessel.

*6: A = No adhesion of polymers to the autoclave wall or impeller was observed.

B = Slight adhesion of polymers to the autoclave wall or impeller was observed.

C = Extensive adhesion of polymers to the autoclave wall or impeller was observed.

[0358]

[Table 7]

Table 7 Polymerization method (2) Evaluation of polymerization activity

	Catalyst (A)		Comonomer 1-hexene ml	Component (B)	Component (C)	(B)+(C) Charge method	(B) + (C) mixing ratio (in polymerization vessel)		Yield g	Mileage g-PE /g-cat	Activity ratio	Component (C)/(B) Weight ratio	Component (C)/(B) Molar ratio
	Name	g					Component (B) mg	Component (C) mg					
Comparative Example 7-2	(i)	0.08	20	Chemistat 2500	None	-	24.50	0.00	36.9	492	100%	0.00	0.00
Example 14-2	(i)	0.08	20	Chemistat 2500	Et ₂ Al(OEt) ^{*1}	Method (1) ^{*3}	24.50	12.25	81.3	1084	220%	0.50	1.10
Example 15-2	(i)	0.08	20	Chemistat 2500	Et ₂ Al(OEt) ^{*1}	Method (1) ^{*3}	24.50	16.35	81.1	1081	220%	0.67	1.47
Comparative Example 8-2	(i)	0.08	20	Chemistat 2500	None	-	28.00	0.00	25.6	341	100%	0.00	0.00
Example 17-2	(i)	0.08	20	Chemistat 2500	Et ₂ Al(OEt) ^{*1}	Method (1) ^{*3}	28.00	18.68	61.2	815	239%	0.67	1.47
Example 18-2	(i)	0.08	20	Chemistat 2500	Et ₂ Al(OEt) ^{*1}	Method (1) ^{*3}	28.00	14.00	85.3	1137	333%	0.50	1.10
Comparative Example 10-2	(v)	0.15	5	Chemistat 2500	None	-	7.00	0.00	38.5	257	100%	0.00	0.00
Example 20-2	(v)	0.15	5	Chemistat 2500	Et ₂ Al(OEt) ^{*1}	Method (1) ^{*3}	7.00	3.50	59.3	395	154%	0.50	1.10
Example 21	(v)	0.15	5	Chemistat 2500	Et ₂ Al(OEt) ^{*1}	Method (1) ^{*3}	7.00	4.67	44.0	293	114%	0.67	1.47
Comparative Example 11-2	(i)	0.14	0	Chemistat 2500	None	-	21.00	0.00	89.7	664	100%	0.00	0.00
Example 22-2	(i)	0.14	0	Chemistat 2500	Et ₂ Al(OEt) ^{*1}	Method (1) ^{*3}	21.00	14.00	103.2	764	115%	0.67	1.47
Comparative Example 12-2	(v)	0.15	0	Chemistat 2500	None	-	14.00	0.00	38.4	256	100%	0.00	0.00
Example 23-2	(v)	0.15	0	Chemistat 2500	Et ₂ Al(OEt) ^{*1}	Method (1) ^{*3}	14.00	7.00	85.5	570	223%	0.50	1.10
Comparative Example 13-2	(vi)	0.15	5	Chemistat 2500	None	-	28.00	0.00	68.1	454	100%	0.00	0.00
Example 24-2	(vi)	0.15	5	Chemistat 2500	Et ₂ Al(OEt) ^{*1}	Method (1) ^{*3}	28.00	14.00	117.2	781	172%	0.50	1.10
Example 25-2	(vi)	0.15	5	Chemistat 2500	Et ₂ Al(OEt) ^{*1}	Method (1) ^{*3}	28.00	18.68	91.0	607	134%	0.67	1.47
Example 26-2	(vi)	0.15	5	Chemistat 2500	Et ₂ Al(OEt) ^{*1}	Method (1) ^{*3}	14.00	7.00	173.2	1155	254%	0.50	1.10

5

*1: Et₂Al(OEt) = Diethylaluminum ethoxide

*3: Method (1) = Components (B) and (C) were pre-mixed and charged into the polymerization vessel.

[0359]

[Table 8]

Table 8 Polymerization method (1) Evaluation of condition of autoclave wall

	Catalyst (A-a)		Catalyst (A-b)		Comonomer 1-hexene ml	Component (B)	Component (C)	(B)+(C) Charge method	(B)+(C) mixing ratio		Adhesion to wall* ⁶	(C)/(B) weight ratio	(C)/(B) molar ratio
	Name	g	Name	g					Component (B) mg	Component (C) mg			
Comparative Example 15-1	(iii)	0.27	(iii)	0.43	20	Chemistat 2500	None	-	7.00	0.00	B	0.00	0.00
Example 27-1	(iii)	0.28	(iii)	0.40	20	Chemistat 2500	iBu ₂ AlH * ¹⁰	Method (1)* ³	7.00	3.50	A	0.50	1.01
Example 28-1	(iii)	0.27	(iii)	0.43	20	Chemistat 2500	iBu ₂ AlH * ¹⁰	Method (1)* ³	7.00	5.78	A	0.83	1.67
Example 29-1	(iii)	0.33	(iii)	0.46	20	Chemistat 2500	Et ₃ Al * ¹¹	Method (1)* ³	7.00	3.50	A	0.50	1.26
Example 30-1	(iii)	0.25	(iii)	0.42	20	Chemistat 2500	Et ₃ Al * ¹¹	Method (1)* ³	7.00	4.67	A	0.67	1.68
Example 31-1	(iii)	0.30	(iii)	0.40	20	Chemistat 2500	iBu ₂ AlH * ¹⁰	Method (1)* ³	7.00	8.75	A	1.25	3.14
Example 32-1	(iii)	0.30	(iii)	0.40	20	Chemistat 2500	nHex ₃ Al * ¹²	Method (1)* ³	7.00	3.50	A	0.50	0.51
Example 33-1	(iii)	0.30	(vii)	0.40	20	Chemistat 2500	Et ₂ Al(OEt) * ¹	Method (1)* ³	7.00	3.50	A	0.50	0.51

5

*1: Et₂Al(OEt) = Diethylaluminum ethoxide

*3: Method (1) = Components (B) and (C) were pre-mixed and charged into the polymerization vessel.

*6: A = No adhesion of polymers to the autoclave wall or impeller was observed.

B = Slight adhesion of polymers to the autoclave wall or impeller was observed.

C = Extensive adhesion of polymers to the autoclave wall or impeller was observed.

10

*10: iBu₂AlH = Diisobutylaluminum hydride*11: Et₃Al = Triethylaluminum*12: nHex₃Al = Tri-normal-hexylaluminum

[0360]

[Table 9]

Table 9 Polymerization method (2) Evaluation of polymerization activity

	Catalyst (A)		Comonomer 1-hexene ml	Component (B)	Component (C)	(B)+(C) Charge method	(B) + (C) mixing ratio (in polymerization vessel)	
	Name	g					Component (B) mg	Component (C) mg
Comparative Example 15-2	(iii)	0.41	20	Chemistat 2500	None	-	7.00	0.00
Example 27-2	(iii)	0.32	20	Chemistat 2500	iBu ₂ AlH ^{*10}	Method (1) ^{*3}	7.00	3.50
Example 28-2	(iii)	0.42	20	Chemistat 2500	iBu ₂ AlH ^{*10}	Method (1) ^{*3}	7.00	5.78
Example 29-2	(iii)	0.42	20	Chemistat 2500	Et ₃ Al ^{*11}	Method (1) ^{*3}	7.00	3.50
Example 30-2	(iii)	0.43	20	Chemistat 2500	Et ₃ Al ^{*11}	Method (1) ^{*3}	7.00	4.67
Example 31-2	(iii)	0.45	20	Chemistat 2500	iBu ₂ AlH ^{*10}	Method (1) ^{*3}	7.00	8.75
Example 32-2	(iii)	0.43	20	Chemistat 2500	nHex ₃ Al ^{*12}	Method (1) ^{*3}	7.00	3.50
Example 33-2	(vii)	0.35	20	Chemistat 2500	Et ₂ Al(OEt) ^{*1}	Method (1) ^{*3}	7.00	3.50

	Activity ratio	(C)/(B)	(C)/(B)	(C)/(B)
		Weight ratio	Molar ratio	Molar ratio
Comparative Example 15-2	100% ^{*13}	0.00	0.00	0.00
Example 27-2	117% ^{*13}	0.50	1.01	1.01
Example 28-2	117% ^{*13}	0.83	1.67	1.67
Example 29-2	113% ^{*13}	0.50	1.26	1.26
Example 30-2	112% ^{*13}	0.67	1.68	1.68
Example 31-2	113% ^{*13}	1.25	2.52	2.52
Example 32-2	133% ^{*13}	0.50	1.01	1.01
Example 33-2	129% ^{*14}	0.50	1.01	1.01

*1: Et₂Al(OEt) = Diethylaluminum ethoxide

*3: Method (1) = Components (B) and (C) were pre-mixed and charged into the polymerization vessel.

*10: iBu₂AlH = Diisobutylaluminum hydride*11: Et₃Al = Triethylaluminum*12: nHex₃Al = Tri-nomal-hexylaluminum

*13: Activity ratio when that of Comparative Example 15-2 is 100%.

*14: Activity ratio when the activity of the example in which no component (C) is used is 100%.

[0361]

[Table 10]

Table 10 Polymerization method (2) Evaluation of polymerization activity

	Catalyst (A)		Comonomer 1-hexene ml	Component (B)	Component (C)	(B)+(C)
	Name	g				Charge method
Comparative Example 16	(iii)	0.43	20	AMIET 105	Et ₂ Al(OEt) ^{*1}	Method (1) ^{*3}
Comparative Example 17	(iii)	0.45	20	EPAN 720	Et ₂ Al(OEt) ^{*1}	Method (1) ^{*3}
Comparative Example 18	(iii)	0.48	20	EMULGEN 108	Et ₂ Al(OEt) ^{*1}	Method (1) ^{*3}
Comparative Example 19	(iii)	0.47	20	Electro-stripper EA	Et ₂ Al(OEt) ^{*1}	Method (1) ^{*3}
Comparative Example 20	(iii)	0.4	20	Electro-stripper EA-7	Et ₂ Al(OEt) ^{*1}	Method (1) ^{*3}
Comparative Example 21	(iii)	0.45	20	Costelan AS 100	Et ₂ Al(OEt) ^{*1}	Method (1) ^{*3}
Comparative Example 22	(iii)	0.53	20	Costelan AS 100	nHex ₃ Al ^{*12}	Method (1) ^{*3}

	(B) + (C) mixing ratio (in polymerization vessel)		Activity ratio ^{*15}	Component(C)/(B)
	Component (B)	Component (C)		Weight ratio
	mg	mg		
Comparative Example 16	7.0	3.5	91%	0.50
Comparative Example 17	14.0	3.5	95%	0.25
Comparative Example 18	7.0	3.5	85%	0.50
Comparative Example 19	7.0	7.0	78%	1.00
Comparative Example 20	7.0	3.5	94%	0.50
Comparative Example 21	7.0	3.5	92%	0.50
Comparative Example 22	7.0	3.5	96%	0.50

*1: Et₂Al(OEt) = Diethylaluminum ethoxide

*3: Method (1) = Components (B) and (C) were pre-mixed and charged into the polymerization vessel.

*12: nHex₃Al = Tri-normal-hexylaluminum

*15: Activity ratio when the activity of the example in which no component (C) is used is 100%.

Industrial Applicability

[0362]

According to the present invention, olefin (co)polymerization is conducted in a polymerization vessel containing both an aliphatic amide (B) and an organoaluminum compound (C). Since this reduces the decrease in polymerization activity of the olefin and effectively ensures the flowability inside the polymerization vessel without decreasing the production rate, thereby preventing adhesion of polymers to the vessel wall or impeller, long-term stable operation can be achieved in high activity and an olefin polymer having good particle properties can be produced.

[0363]

The production method is applicable to a wide range of processes, such as suspension polymerization, solution polymerization and gas-phase polymerization.

Claims

1. A method for producing an olefin polymer, comprising (co)polymerizing at least one olefin selected from the group consisting of ethylene and α -olefins having 3 to 20 carbon atoms in a polymerization vessel in the presence of
 - (A) a solid catalyst component for olefin polymerization,
 - (B) an aliphatic amide, and
 - (C) an organoaluminum compound,wherein the aliphatic amide (B) and the organoaluminum compound (C) are preliminarily mixed and then added to the polymerization vessel.
2. The method for producing an olefin polymer according to claim 1, wherein the aliphatic amide (B) is represented by general formula (I) below:
$$(C_mH_{2m+1}CO)N(CH_2CH_2OH)_2 \quad (I),$$
in the general formula (I), m denotes an integer of 1 to 30.
3. The method for producing an olefin polymer according to claim 1, wherein the organoaluminum compound (C) is represented by general formula (II) below:
$$R^a{}_mAl(OR^b)_nH_p \quad (II)$$
in general formula (II), R^a and R^b each denote a hydrocarbon group having 1 to 20 carbon atoms; m, n and p satisfy the relations: $0 < m \leq 3$; n is $0 \leq n < 3$, p is $0 \leq p < 3$, and $m+n+p=3$.
4. The method for producing an olefin polymer according to claim 1, wherein the molar ratio, (C)/(B), of the organoaluminum compound (C) to the aliphatic amide (B) is 0.01 to 4.0.
5. The method for producing an olefin polymer according to claim 1, wherein the molar ratio, (C)/(B), of the organoaluminum compound (C) to the aliphatic amide (B) is 0.01 to 3.5.
6. The method for producing an olefin polymer according to claim 1, wherein the molar ratio, (C)/(B), of the organoaluminum compound (C) to the aliphatic amide (B) is $(C)/(B)=0.01$ to 3.2.

7. The method for producing an olefin polymer according to claim 1, wherein the molar ratio, (C)/(B), of the organoaluminum compound (C) to the aliphatic amide (B) is 0.01 to 3.0.

5

8. The method for producing an olefin polymer according to claim 1, wherein the molar ratio, (C)/(B), of the organoaluminum compound (C) to the aliphatic amide (B) is 0.2 to 2.8.

10 9. The method for producing an olefin polymer according to claim 1, wherein the molar ratio, (C)/(B), of the organoaluminum compound (C) to the aliphatic amide (B) is 0.3 to 2.5.

10. The method for producing an olefin polymer according to claim 1, wherein the solid catalyst component for olefin polymerization (A) contains

(A-1) a group 4 transition metal compound having a cyclopentadienyl skeleton,

(A-2) at least one compound selected from

(a) an organometal compound,

20 (b) an organoaluminoxy compound, and

(c) a compound that forms an ion pair by reacting with (A-1), and

(A-3) a particulate carrier.

11. The method for producing an olefin polymer according to claim 1, wherein the (co)polymerization is conducted in a suspension, a solution, or a gas phase.

25

METHOD FOR PRODUCING OLEFIN POLYMER

Abstract

5 Disclosed is a method for producing an olefin polymer, with
which an olefin polymer having excellent particle
properties can be produced in high activity, dirt on the
wall of a polymerization vessel or on the inside of the
polymerization vessel such as a stirring blade can be
10 effectively prevented, and an operation can be stably
carried out for a long period of time. The method for
producing an olefin polymer comprises (co)polymerizing one
or more olefins selected from a group consisting of
ethylene and α -olefins having 3 to 20 carbon atoms in a
15 polymerization vessel in the presence of (A) a solid
catalytic component for olefin polymerization, (B) an
aliphatic amide, and (C) an organic aluminum compound.

Figure 4.