


1/10




Full-function device

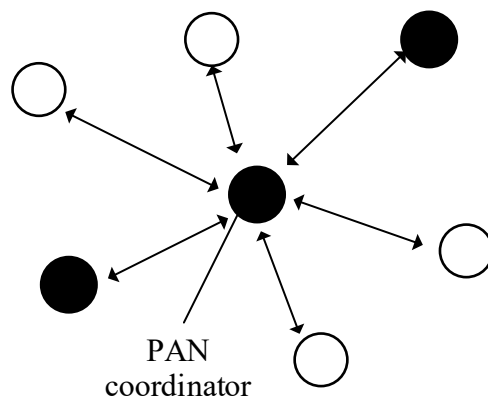

Reduced-function device

FIG. 1

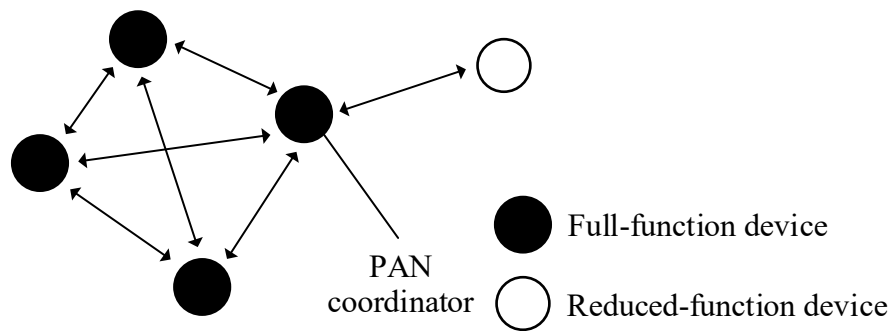


Full-function device



Reduced-function device

FIG. 2

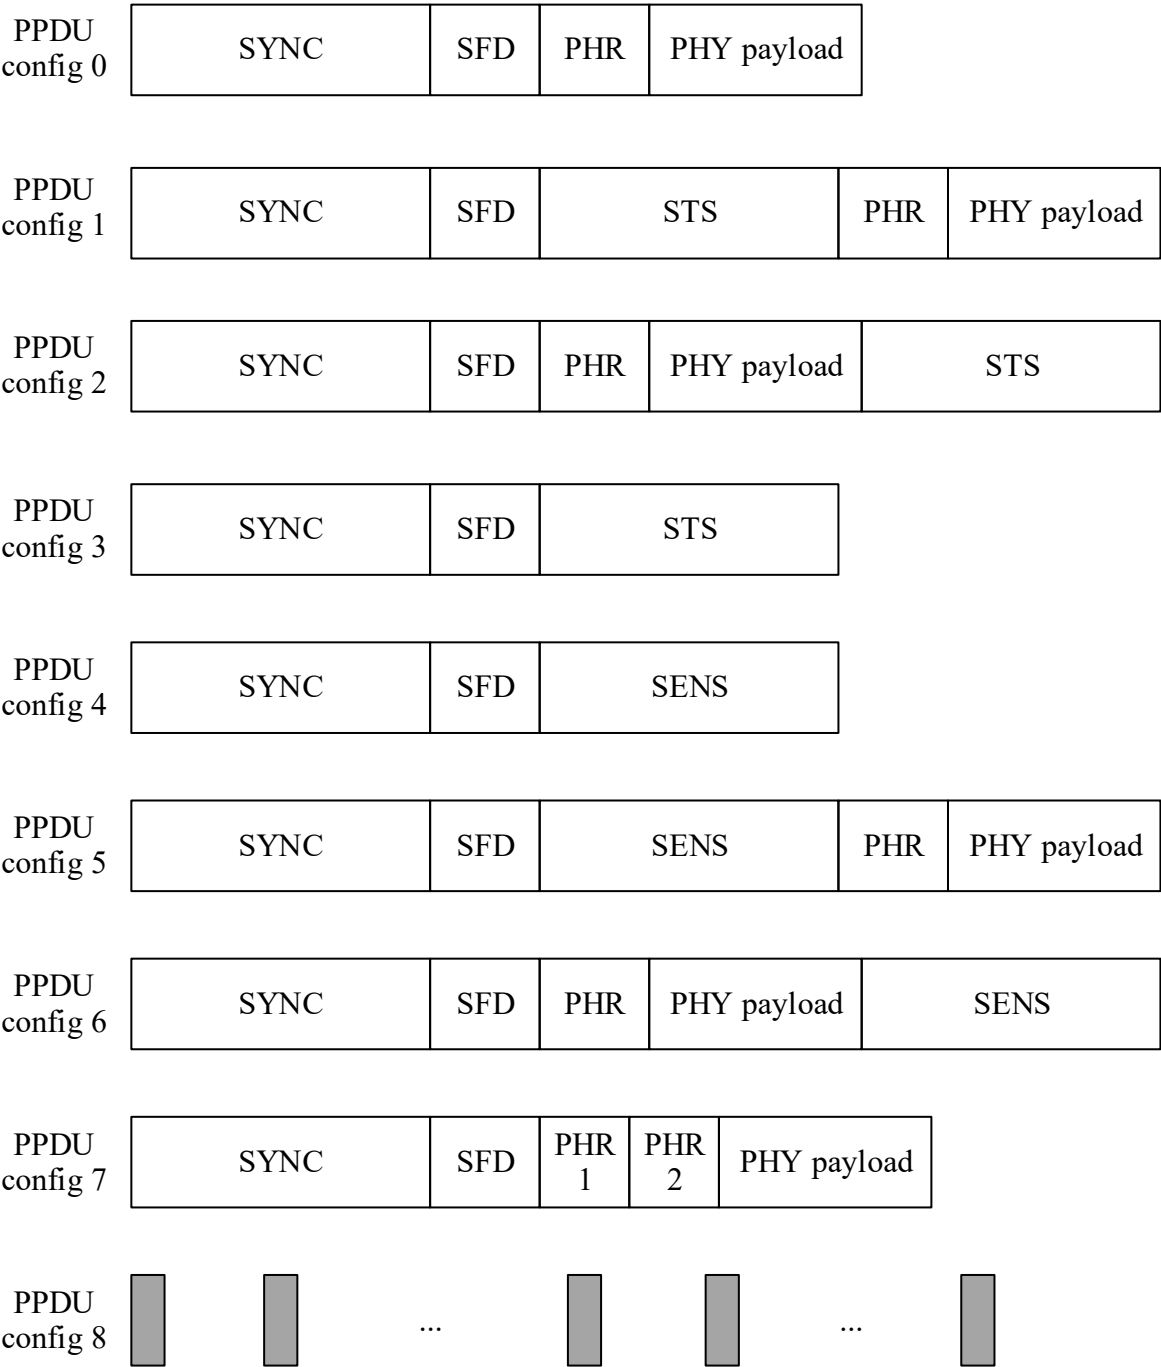

SYNC: synchronization SFD: start-of-frame delimiter PHR: physical layer header
SENS: sensing
STS: scrambled timestamp sequence PHY payload: physical payload
PPDU: physical layer protocol data unit config 0 to 8: configuration 0 to 8

FIG. 3

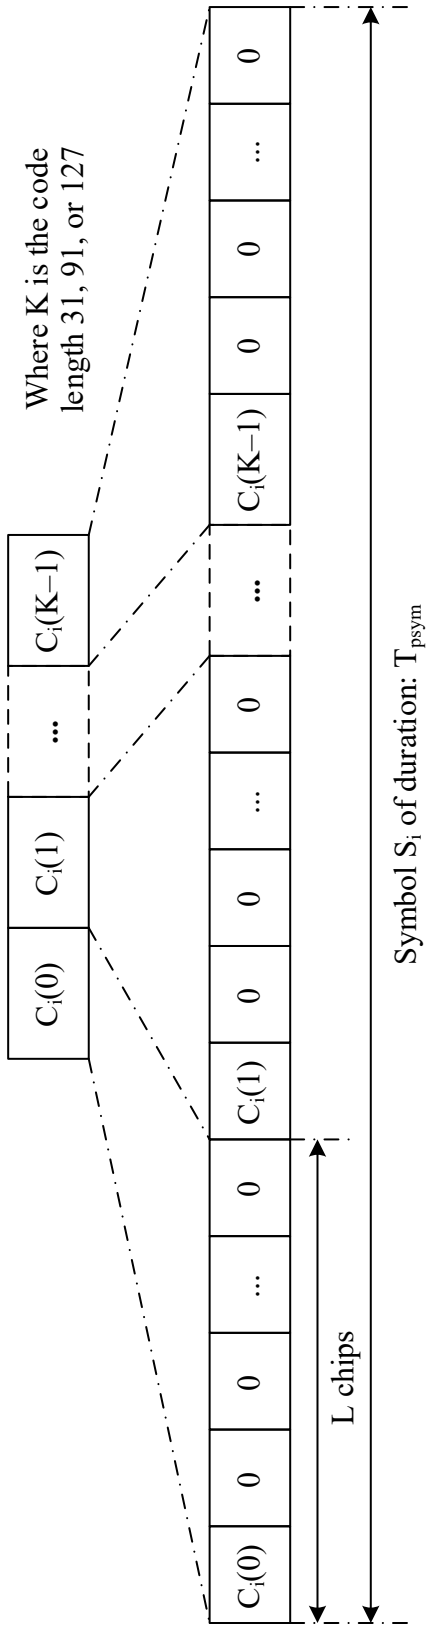


FIG. 4

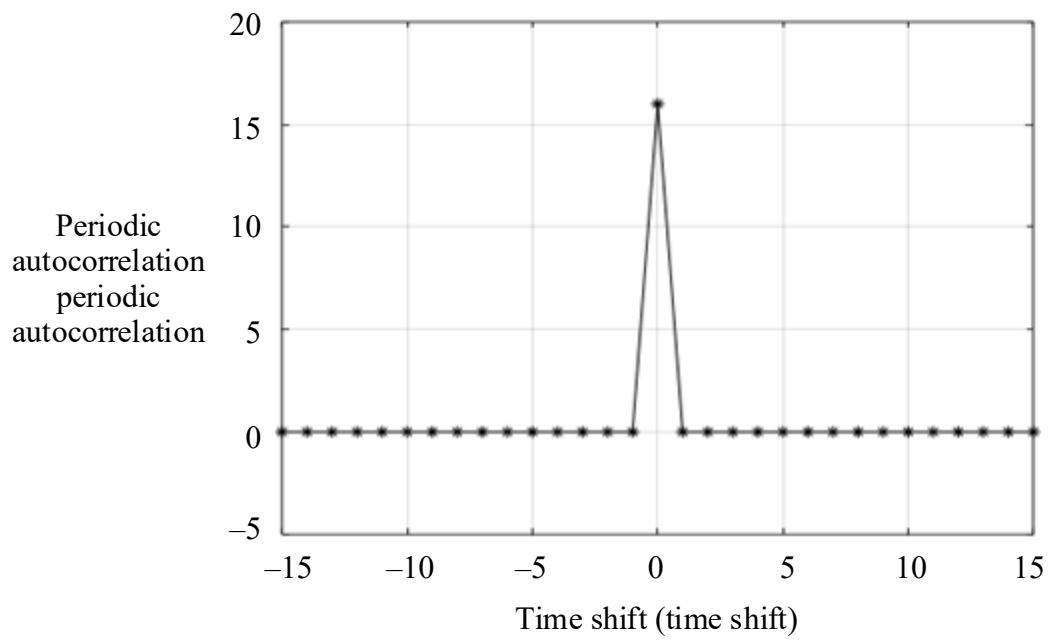


FIG. 5



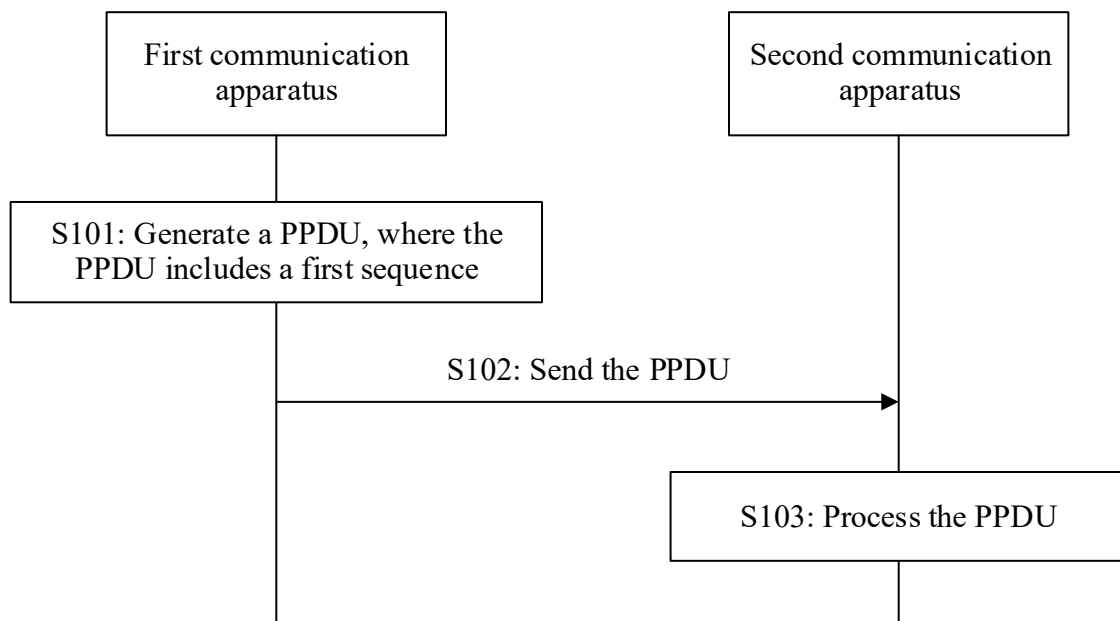


FIG. 6

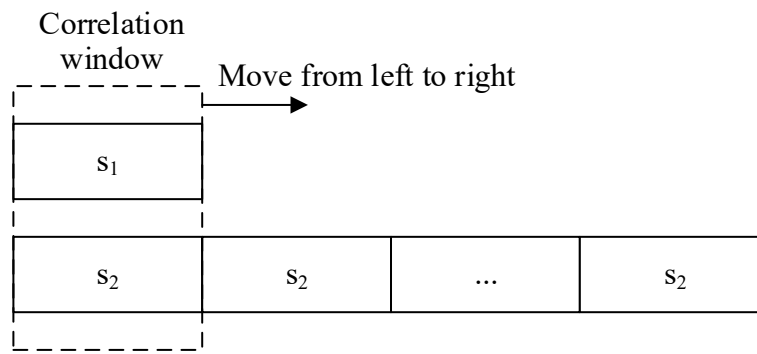

(a) Diagram of calculating a CIR
when s_1 is the same as s_2

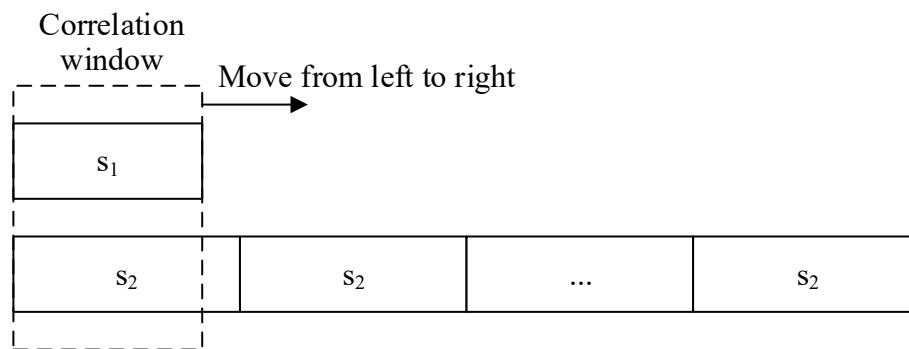

(b) Diagram of calculating a CIR
when s_1 is different from s_2

FIG. 7

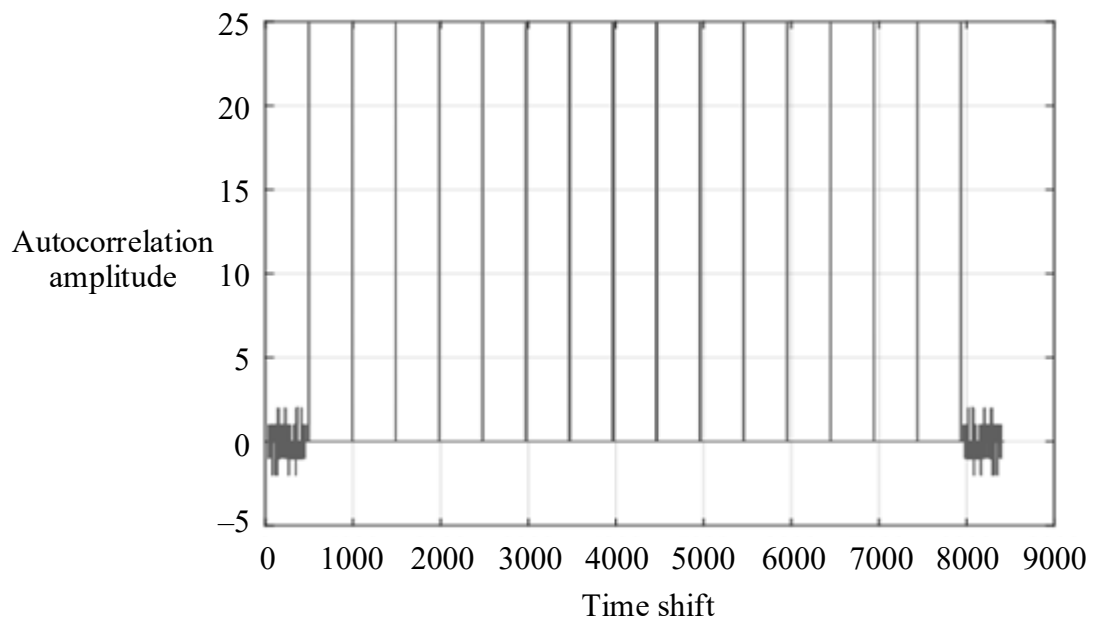


FIG. 8a

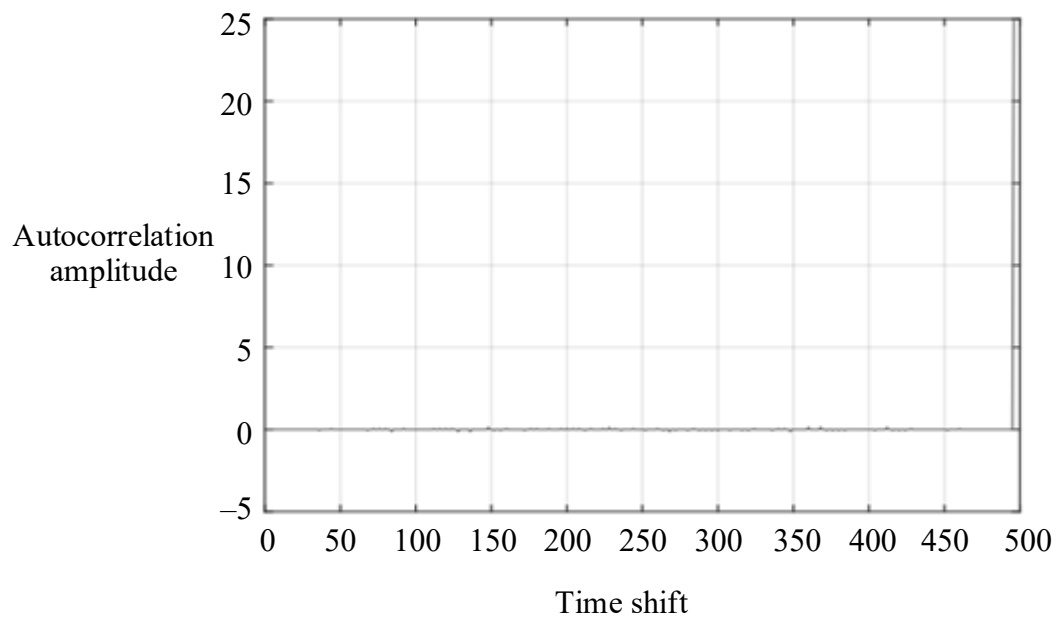


FIG. 8b

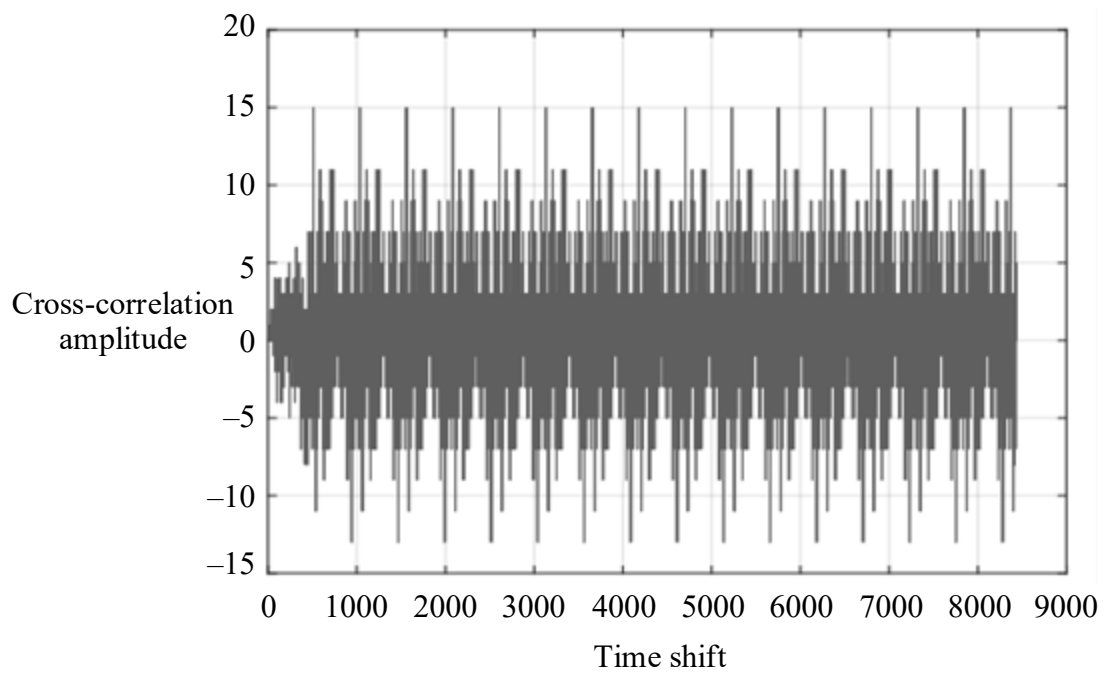


FIG. 9a

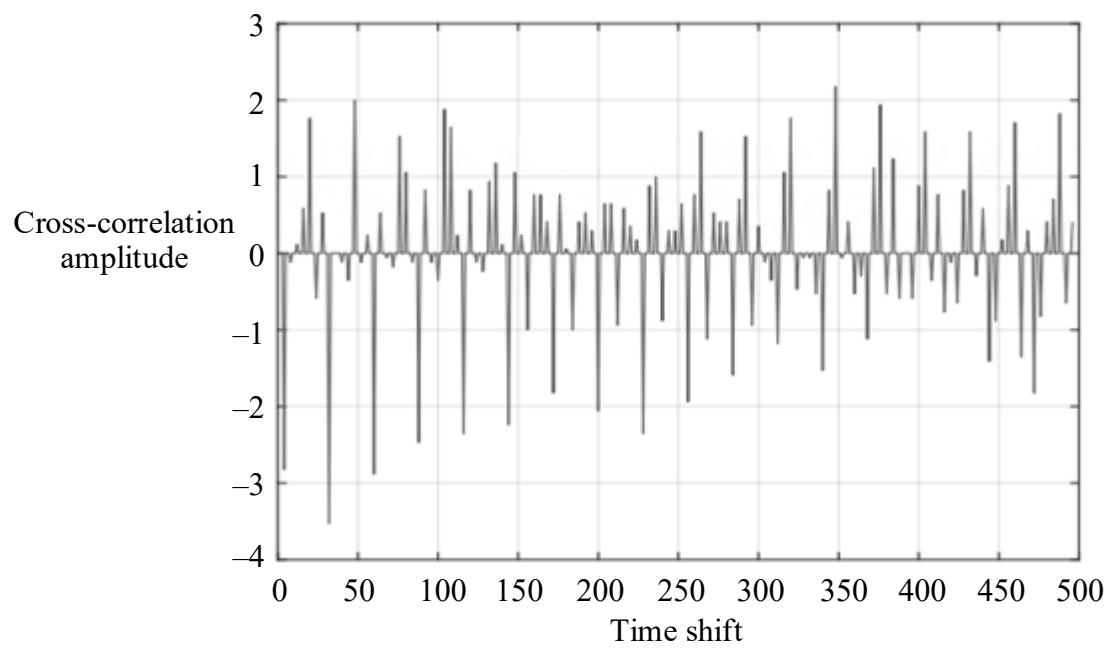


FIG. 9b

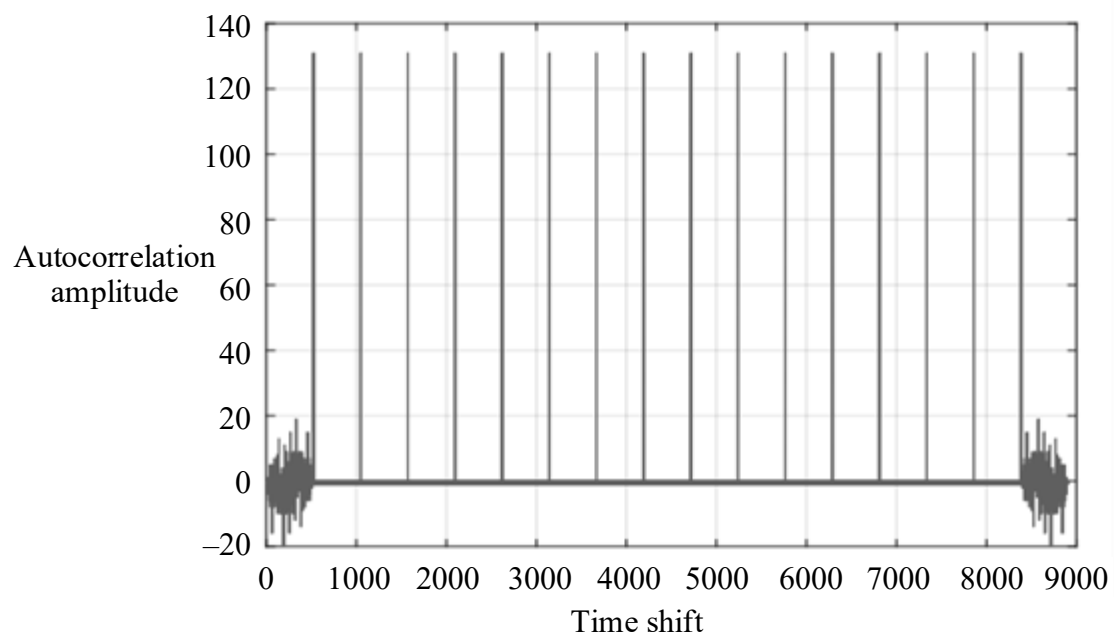


FIG. 10a

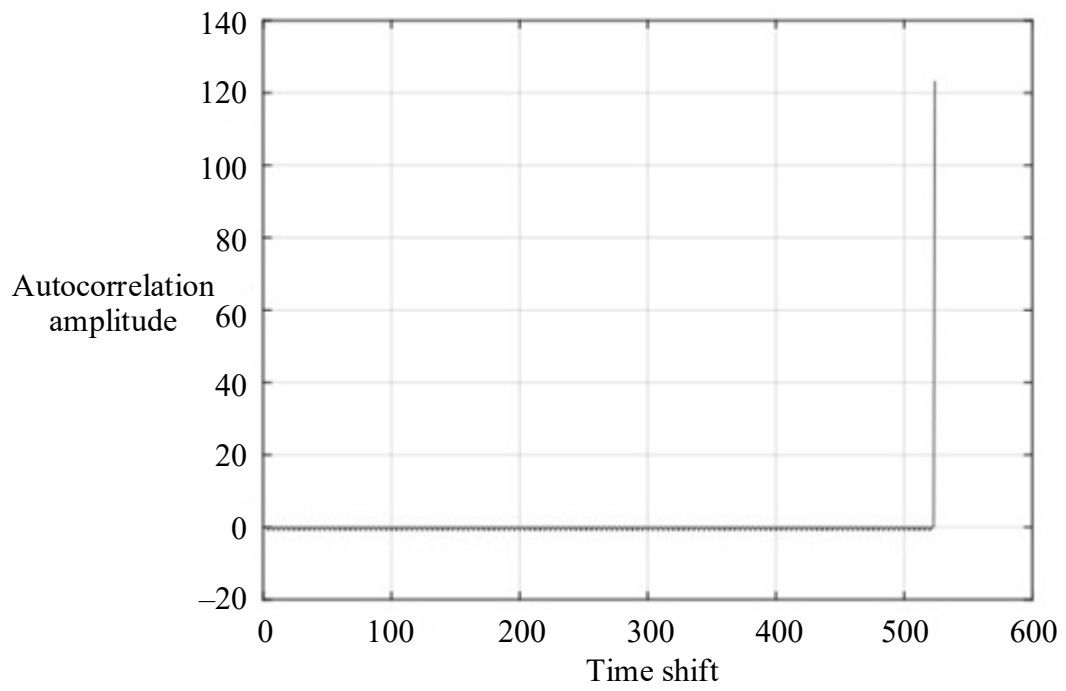


FIG. 10b

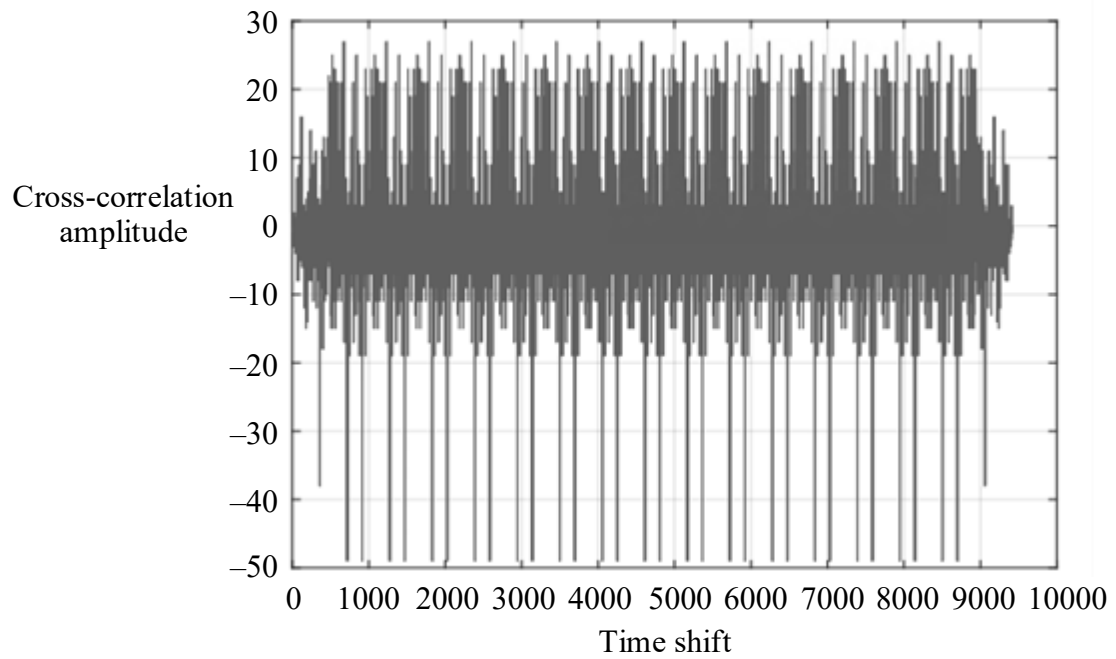


FIG. 11a

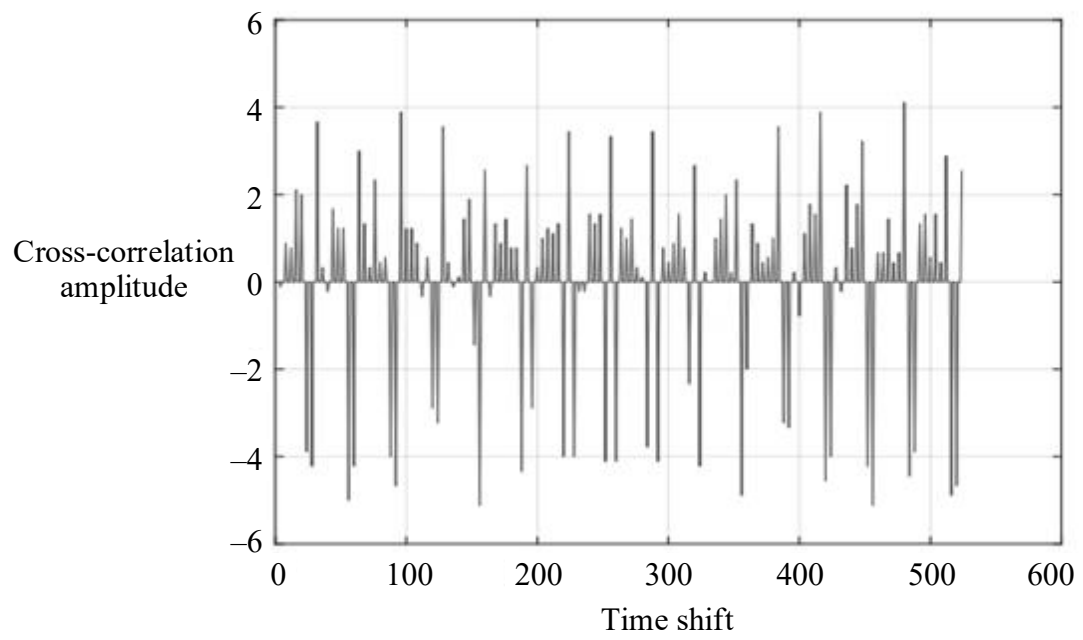


FIG. 11b

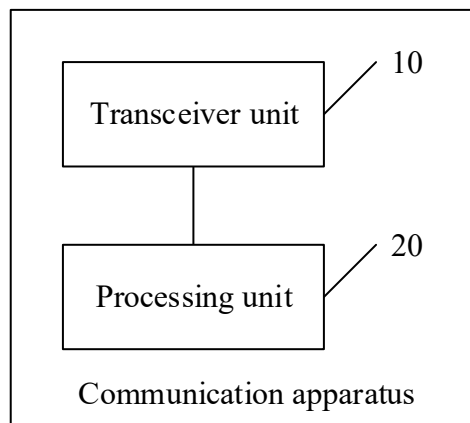


FIG. 12

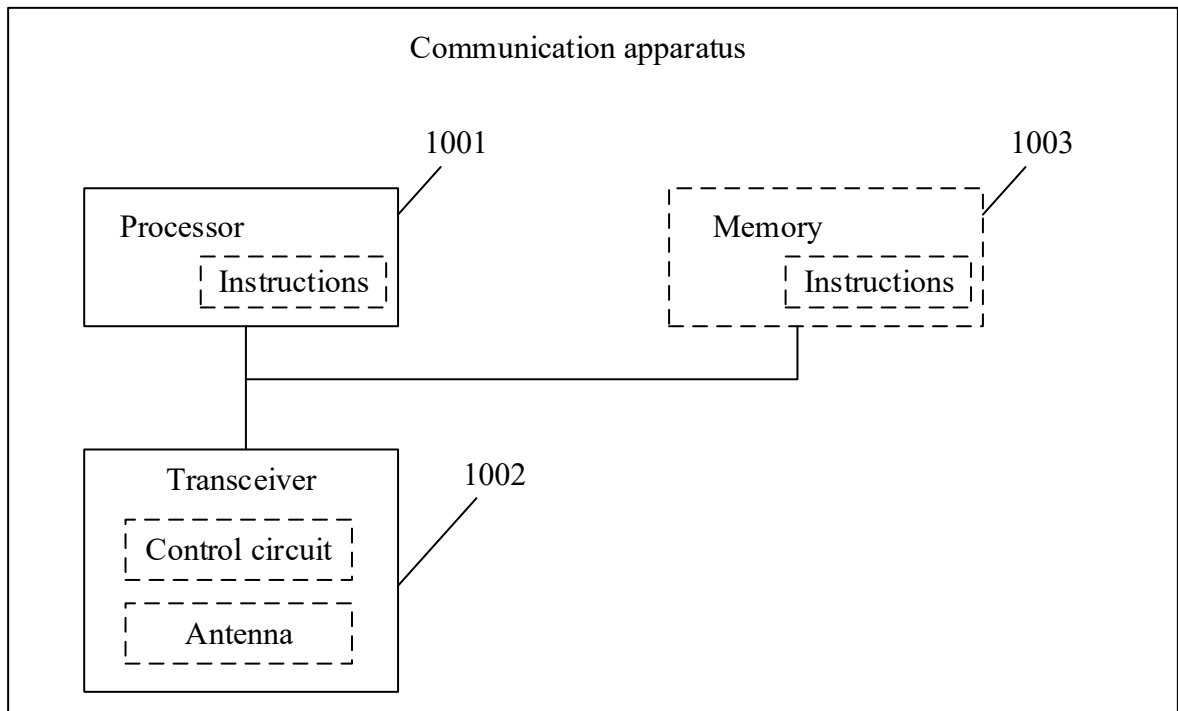


FIG. 13

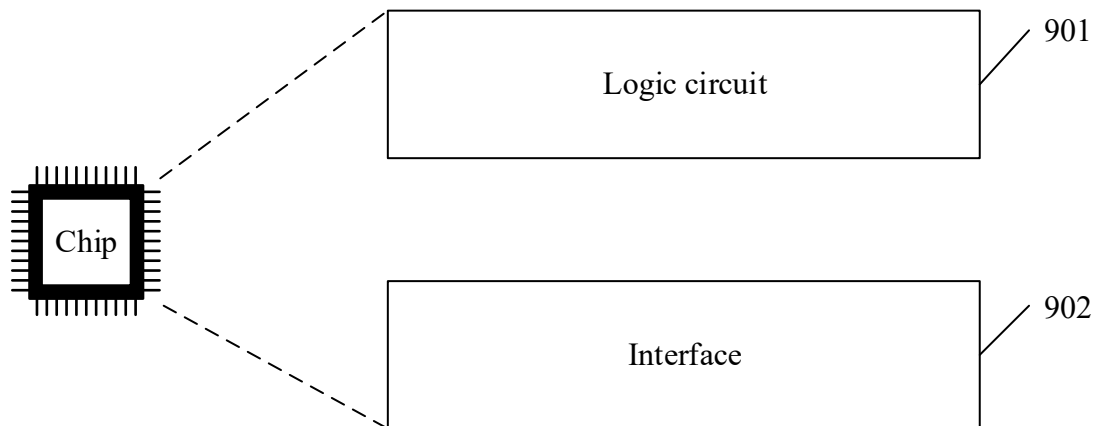


FIG. 14