

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
07 April 2022 (07.04.2022)



(10) International Publication Number
WO 2022/071895 A1

(51) International Patent Classification:
A47G 25/40 (2006.01)

(21) International Application Number:
PCT/SK2020/050017

(22) International Filing Date:
29 September 2020 (29.09.2020)

(25) Filing Language: Slovak

(26) Publication Language: English

(72) Inventor; and

(71) Applicant: JAKEŠ, Boris [SK/SK]; Michalská 16, 811 01 Bratislava (SK).

(72) Inventor: JAKEŠ, Zdeněk; Športová 249/3, 906 13 Brezová pod Bradlom (SK).

(74) Agent: MAJLINGOVA & PARTNERS, S.R.O.; Budatínska 12, 851 06 Bratislava (SK).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,

(54) Title: FOLDABLE HANGER

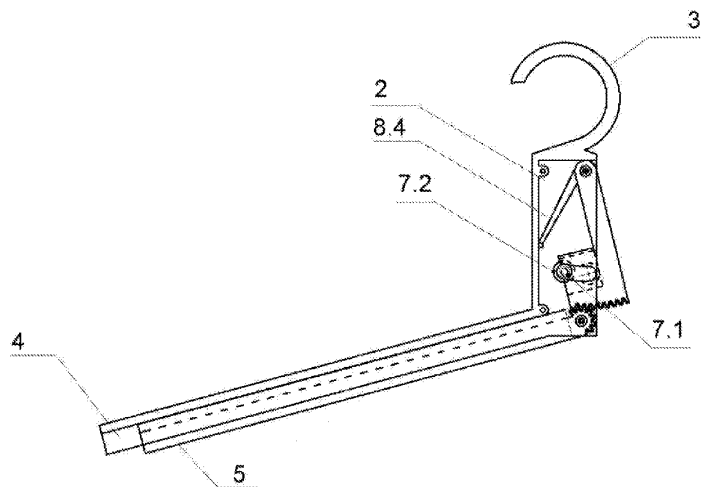


Fig. 2

(57) Abstract: Foldable hanger (1) comprising a body (2) with a hanging element (3), one firm arm (4) fixed to the body (2) and one movable arm (5) pivotally attached to the body (2), an arresting pin (7) attached with a spike (6) in a flexible and sliding manner, the arresting pin consisting of a shank (7.1) having a relief (7.2) for snapping to an arresting groove (8.3) of a sliding-block guide (8) which is movably positioned in the body between open and closed positions comprising a guiding slot (8.1) for the shank (7.1), a space (8.2) for free movement of the relief (7.2) along the whole guiding slot arresting groove (8.3) for the relief at the closed end of the guiding slot (8.1); a prestressed flexible element (8.4) for sliding the sliding-block guide (8) to its open position; sliding-block guide cogs (8.5) for collaboration with cogs (5.1) of the movable arm and wherein in the closed position the relief is sunk in the arresting groove and the movable arm is in the standard position; and in the open position the arresting pin is at the entry of the guiding groove, and the relief is at the entry of the guiding groove.

[Continued on next page]

TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to the identity of the inventor (Rule 4.17(i))*
- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

Published:

- *with international search report (Art. 21(3))*
- *in black and white; the international application as filed contained color or greyscale and is available for download from PATENTSCOPE*

is out of the arresting groove resulting in moving the sliding-block guide to the position, in which it is accessible for the operation by a user and the movable arm (5) is deflected from its standard position.