


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : B67D 5/56	A1	(11) International Publication Number: WO 99/20562 (43) International Publication Date: 29 April 1999 (29.04.99)
(21) International Application Number: PCT/US98/21909 (22) International Filing Date: 16 October 1998 (16.10.98) (30) Priority Data: 60/062,846 20 October 1997 (20.10.97) US (71) Applicant (for all designated States except US): COURTAULDS AEROSPACE, INC. [US/US]; 2820 Empire Avenue, Burbank, CA 91504 (US). (72) Inventors; and (75) Inventors/Applicants (for US only): MORRIS, David, Paul [US/US]; 26266 Park View Road, Valencia, CA 91355 (US). DANG, Nguyen, Thai [US/US]; Unit C, 2727 Cabrillo Avenue, Torrance, CA 90501 (US). (74) Agents: SPRINKLE, Douglas, W. et al.; Gifford, Krass, Groh, Sprinkle, Patmore, Anderson & Citkowski, P.C., Suite 400, 280 N. Old Woodward, Birmingham, MI 48009 (US).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(54) Title: MULTIPLE PART MANUAL DISPENSING SYRINGE

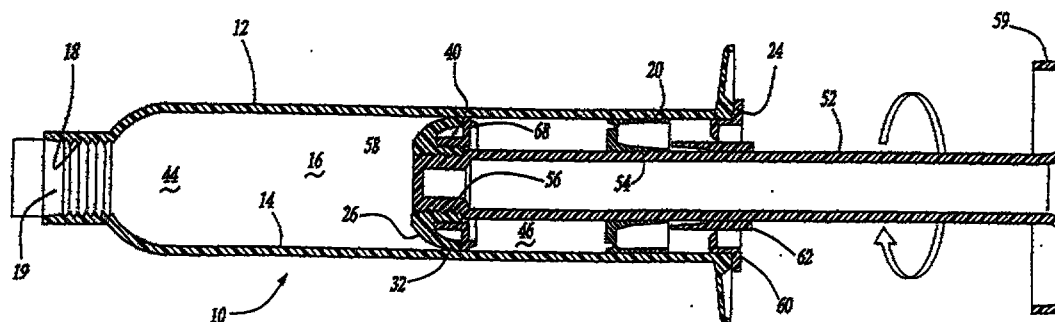

(57) Abstract

A syringe (10) includes a tube (12) defining a chamber (16) with a dispensing opening (18). A plunger (20) is slidably mounted in the tube and is initially positioned at the end (24) of the chamber opposite the dispensing opening. A dasher (26) having an opening (34) is positioned within the chamber at an intermediate point. A cylindrical barrier (40) is detachably secured to the dasher (26). Thus, with the barrier secured to the dasher, the barrier and dasher sealingly engages the tube dividing it into two subchambers (44, 46). An elongated rod (52) extends through openings (54, 56) in the plunger and the barrier and is secured to the dasher. Rotation of the rod detaches the barrier from the dasher establishing communication between the subchambers. A locking sleeve (62) frictionally secures the rod and the plunger together when the rod is moved to a retracted position (Fig. 4). Furthermore, optionally the rod is hollow (Fig. 9) and defines a third subchamber (80) containing a third liquid.