

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
9 June 2005 (09.06.2005)

PCT

(10) International Publication Number
WO 2005/052520 A2

(51) International Patent Classification⁷: **G01F**
(21) International Application Number:
PCT/US2004/038836

(22) International Filing Date:
19 November 2004 (19.11.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/707,078 19 November 2003 (19.11.2003) US

(71) Applicant (for all designated States except US): **EMERSON ELECTRIC CO.** [US/US]; 8000 West Florissant, St. Louis, MO 63136 (US).

(72) Inventor: **DILLE, Joseph, C.**; 628 Cowpath Rd, Telford, PA 18969-2148 (US).

(74) Agent: **DEAVER, Albert, B., Jr.**; Locke Liddel & Sapp LLP, 600 Travis Suite 3400, Houston, TX 77002-3095 (US).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— without international search report and to be republished upon receipt of that report

[Continued on next page]

(54) Title: TUBE ASSEMBLY AND METHOD

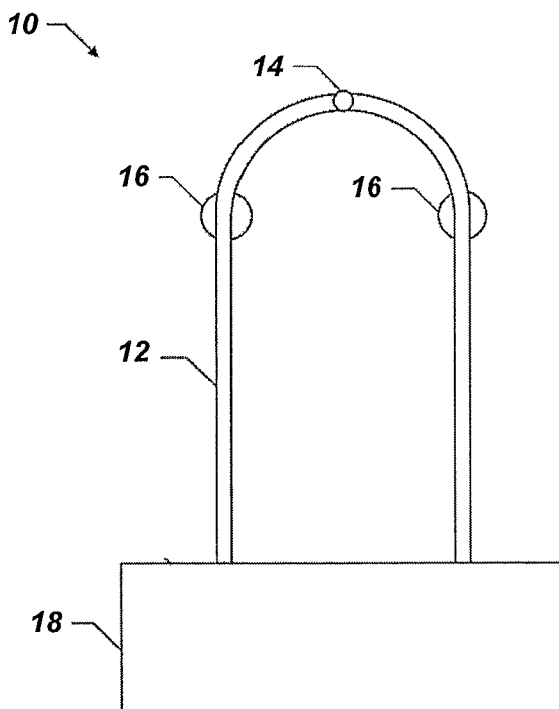

(57) Abstract: A flow sensor tube assembly includes a base member having first and second generally opposing sides. An opening extends through the base member, and an end of a flow sensor tube is received in the opening. A filler material is situated in the opening surrounding the flow sensor tube adjacent the first side of the base member to attach the tube to the base member. The flow sensor tube is welded to the base member adjacent the second side of the base member.

WO 2005/052520 A2



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.