




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : G06K 7/00	A1	(11) International Publication Number: WO 00/68867 (43) International Publication Date: 16 November 2000 (16.11.00)
<p>(21) International Application Number: PCT/EP00/03906</p> <p>(22) International Filing Date: 2 May 2000 (02.05.00)</p> <p>(30) Priority Data: 99/05857 7 May 1999 (07.05.99) FR</p> <p>(71) Applicant (for all designated States except US): ITT MANUFACTURING ENTERPRISES INC. [US/US]; 1105 North Market Street, Suite 1217, Wilmington, DE 19801 (US).</p> <p>(72) Inventors; and (75) Inventors/Applicants (for US only): BRICAUD, Hervé [FR/FR]; 166, avenue Eisenhower, F-39100 Dole (FR). PIZARD, Yves [FR/FR]; 106, avenue Georges Pompidou, F-39100 Dole (FR).</p> <p>(74) Agent: KOHN, Philippe; Cabinet Philippe Kohn, 30, rue Hoche, F-93500 Pantin (FR).</p>		<p>(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published With international search report.</p>

(54) Title: ONE-PIECE ELECTRICAL CONNECTOR FOR THE CONNECTION OF A SMART CARD

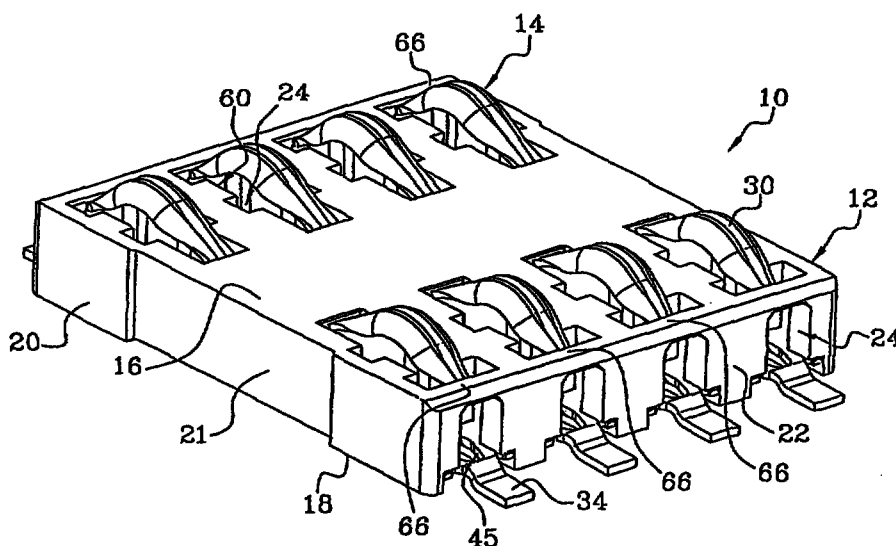

(57) Abstract

The invention provides a connector having a body made of insulating material (12) forming a contact carrier, and a plurality of electrical conductors (14) in the form of elastically deformable blades (14, 30) which are placed parallel to the direction of insertion of the card, each contact blade (14) comprising a curved first end (30) for contact with a corresponding pad on the card, which contact end projects out of the plane of the upper face (16) of the insulating body (12) and is extended by a nose which is elastically pressed, vertically upwards, so as to bear against a stop surface, characterized in that the said stop surface belongs to a crosspiece (66) moulded as one piece with the insulating body (12).