

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
24 June 2004 (24.06.2004)

PCT

(10) International Publication Number
WO 2004/053404 A3

(51) International Patent Classification⁷: **F25B 31/00**

(21) International Application Number:

PCT/US2003/039175

(22) International Filing Date: 9 December 2003 (09.12.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

60/431,901 9 December 2002 (09.12.2002) US

60/434,847 19 December 2002 (19.12.2002) US

10/730,791 9 December 2003 (09.12.2003) US

(71) Applicant (for all designated States except US): **HUDSON TECHNOLOGIES, INC.** [US/US]; 275 North Middletown Road, Pearl River, NY 10965 (US).

(71) Applicants and

(72) Inventors: **ZUGIBE, Kevin** [US/US]; 38 Edgemere Avenue, Greenwood Lake, NY 10925 (US). **PAPAR, Riyaz** [US/US]; 14 Split Rail Place, The Woodlands, TX 77382 (US).

(74) Agent: **HOFFBERG, Steven, M.**; Milde & Hoffberg LLP, 10 Bank Street, Suite 460, White Plains, NY 10606 (US).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

[Continued on next page]

(54) Title: METHOD AND APPARATUS FOR OPTIMIZING REFRIGERATION SYSTEMS

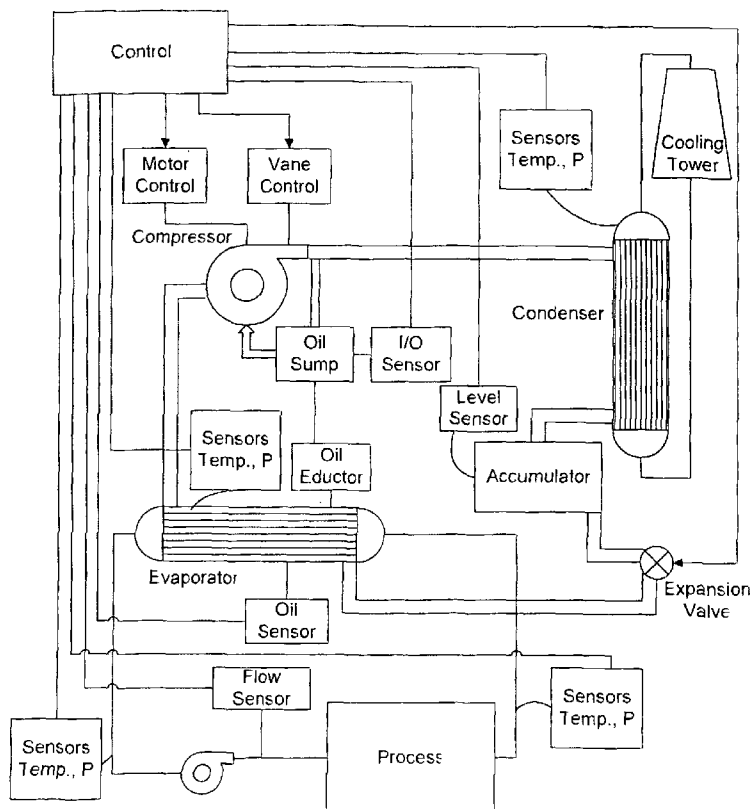

(57) Abstract: A refrigeration system comprising a compressor (100) for compressing a refrigerant, a condenser (107) for condensing refrigerant to a liquid, an evaporator (103) for evaporating liquid refrigerant from the condenser (107) to a gas, an inner control loop for optimizing a supply of liquid refrigerant to the evaporator (103), and an outer control loop for optimizing a level of refrigerant in the evaporator (103), said outer control loop defining a supply rate for said inner control loop based on an optimization including measurement of evaporator (103) performance, and said inner control loop optimizing liquid refrigerant supply based on said defined supply rate. Independent variables, such as proportion of oil in refrigerant, amount of refrigerant, contaminants, non-condensibles, scale and other deposits on heat transfer surfaces, may be estimated or measured. A model of the system and/or a thermodynamic model approximating the system, for example derived from temperature and pressure gages (155, 156), as well as power computations or measurements, is employed to determine or estimate the effect on efficiency of deviance from an optimal state. Various methods are provided for returning the system to an optimal state, and for calculating a cost-effectiveness of employing such processes.



— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(88) Date of publication of the international search report:

16 June 2005