

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

9904507-2 1POS




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification: B32B 5/08, 19/02, 31/20 // E04C 2/292		A1	(11) International Publication Number: WO 98/42503
			(43) International Publication Date: 1 October 1998 (01.10.98)
(21) International Application Number: PCT/FI98/00274		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 26 March 1998 (26.03.98)			
(30) Priority Data: 971292 / 26 March 1997 (26.03.97) / FI			
(71) Applicant (for all designated States except US): PARTEK PAROC OY AB [FI/FI]; Sörnäisten rantatie 23, FIN-00500 Helsinki (FI).			
(72) Inventors; and (75) Inventors/Applicants (for US only): HESELIUS, Lars-Henrik [FI/FI]; Malmnässtrandväg 3 B, FIN-21600 Pargas (FI); WILLMAN, Tarmo [FI/FI]; Laskuttajankatu 16, FIN-20780 Kaarina (FI); BRUNILA, Esko [FI/FI]; Pilvågen 13, FIN-21600 Pargas (FI).		Published With international search report. In English translation (filed in Swedish).	
(74) Agent: OY JALO ANT-WUORINEN AB; Iso Roobertinkatu 4-6 A, FIN-00120 Helsinki (FI).		1 PD. 1 appl ⁿ (Assignment, pls see PF24 of 27/4/00) 3 INVS. IPC = B32B5/08, B32B19/02,	

(54) Title: METHOD FOR PRESSING OF SANDWICH PANELS

B 32 B 31/20 // E04 C 2/292

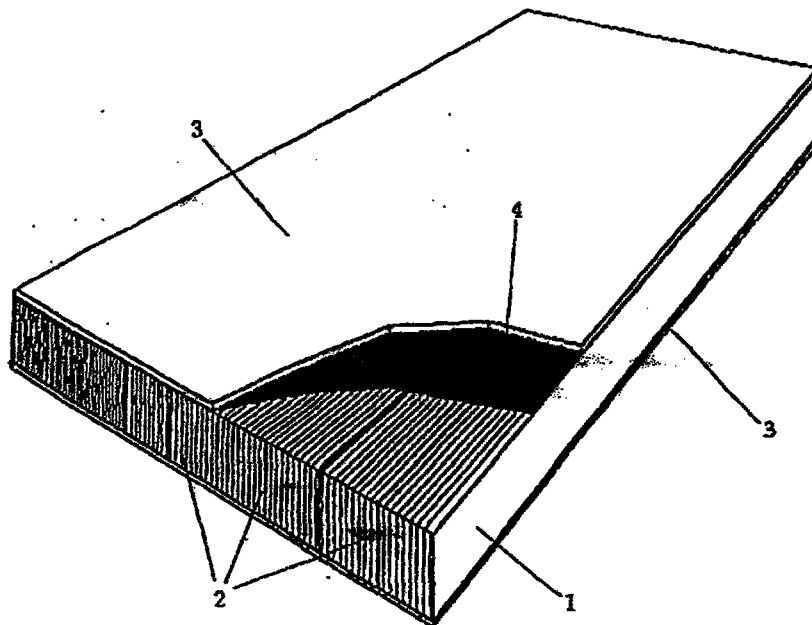

(57) Abstract

The present invention relates to method of lamination-pressing, combined with simultaneous curing of the adhesive layer used in the method, a sandwich product comprising a realigned lamellar mineral wool slab having its both sides lined with a thin facing. The lamination pressure is adjusted to be between a minimum and a maximum pressure, both pressure limits being determined by their respective effects, which in turn are related to the properties of the included materials, that is, the mineral wool, the facing and the adhesive.