



PCT

- (51) **International Patent Classification:**
B66C 1/22 (2006.01) *F16G 17/00* (2006.01)
B66C 1/34 (2006.01)

(21) **International Application Number:**
PCT/AU2011/001110

(22) **International Filing Date:**
1 September 2011 (01.09.2011)

(25) **Filing Language:** English

(26) **Publication Language:** English

(30) **Priority Data:**
2010903928 1 September 2010 (01.09.2010) AU

(71) **Applicant** (*for all designated States except US*): **TURBO HOOK PTY LTD** [AU/AU]; 68 Station Street, Norlane, Victoria 3214 (AU).

(72) **Inventor; and**

(75) **Inventor/Applicant** (*for US only*): **MCKAY, Douglas McGregor** [NZ/AU]; 68 Station Street, Norlane, Victoria 3214 (AU).

(74) **Agent:** **FISHER ADAMS KELLY;** Level 29, 12 Creek Street, Brisbane, Queensland 4000 (AU).

(81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,

[Continued on next page]

- (54) Title:** CHAIN HOOK

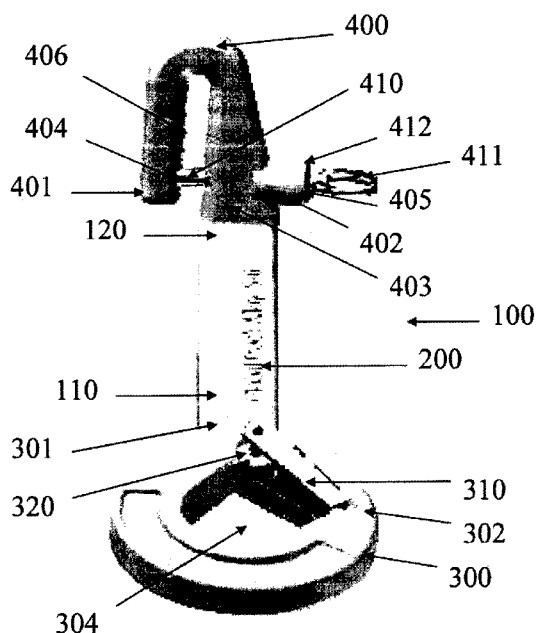


Figure 1

- (57) Abstract:** The present invention provides a chain hook which reduces the risk of disengagement of one or more chains connected thereto. The chain hook comprises an elongate body, a first hook at a first end of the elongate body for connection to a load and a second hook at a second end of the elongate body for connection to at least one chain, wherein the first and second hooks are in different planes.



SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, **Published:**
GW, ML, MR, NE, SN, TD, TG).

— *with international search report (Art. 21(3))*