

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
23 October 2008 (23.10.2008)

PCT

(10) International Publication Number  
**WO 2008/127764 A1**

(51) International Patent Classification:  
F16K 15/06 (2006.01)

(21) International Application Number:  
PCT/US2008/053239

(22) International Filing Date: 6 February 2008 (06.02.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/922,923 11 April 2007 (11.04.2007) US

(71) Applicant (for all designated States except US):  
**CAMERON INTERNATIONAL CORPORATION**  
[US/US]; 4646 W. Sam Houston Parkway North, Houston,  
Texas 77041 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **MOHAMED,  
Zahroof** [IN/US]; 16122 Crooked Lake Way N., Cypress,  
Texas 77433 (US).

(74) Agent: **SWANSON, Tait R.**; 7915 FM 1960 West, Suite  
330, Houston, TX 77070 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: POPPET VALVE ASSEMBLY

(57) Abstract: A valve assembly (20) includes a seat plate (42) having a plurality of fluid conduits (44). The valve assembly may also include a plurality of poppet assemblies (46). In some embodiments, a poppet assembly of such a plurality includes at least one fluid port and a housing (50) configured to be coupled to the seat plate to facilitate flow of a fluid through a respective fluid conduit via the at least one fluid port of the respective poppet assembly.

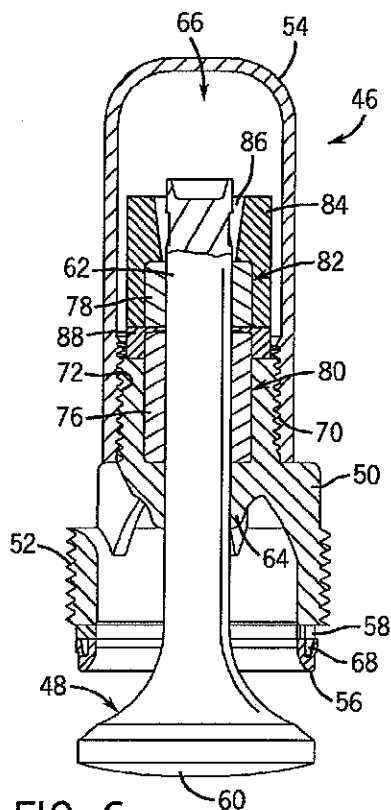


FIG. 6

WO 2008/127764 A1



**Declarations under Rule 4.17:**

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

**Published:**

- *with international search report*