

(51) International Patent Classification:
H04B 1/16 (2006.01)

(21) International Application Number: PCT/US2010/055883

(22) **International Filing Date:** 8 November 2010 (08.11.2010)

(25) **Filing Language:** English

(26) **Publication Language:** English

(30) Priority Data:

61/266,312	3 December 2009 (03.12.2009)	US
12/753,644	2 April 2010 (02.04.2010)	US

(71) **Applicant** (for all designated States except US): **GLOWLINK COMMUNICATIONS TECHNOLOGY, INC.** [US/US]; 333 Distel Circle, Los Altos, California 94022 (US).

(72) Inventors; and

(75) **Inventors/Applicants (for US only): DOWNEY, Michael, L.** [US/US]; 333 Distel Circle, Los Altos, California 94022 (US). **CHU, Jeffrey C.** [US/US]; 333 Distel Circle, Los Altos, California 94022 (US).

(74) **Agent: WESTBERG, Derek, J.;** 569 Clyde Ave Ste 530,
Mountain View, California 94043 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: SYSTEM FOR AND METHOD OF REMOVING UNWANTED INBAND SIGNALS FROM A RECEIVED COMMUNICATION SIGNAL

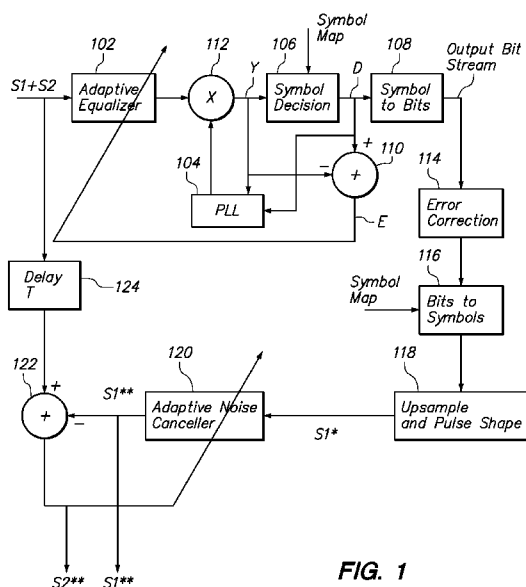


FIG. 1

(57) Abstract: A system for and method of removing one or more unwanted inband signals from a received communications signal is described. The inband signal or signals may comprise noise, interference signals, or any other unwanted signals that impact the quality of the underlying communications. A receiver receives a communication signal, the received communication signal including the desired communication signal and one or more inband signals. A signal processor processes the received signal to form an estimate of the desired communication signal and an estimate of the inband signals. The estimate of the inband signals is thereby removed from the received signal. The estimate of the desired communication signal and the estimate of the inband signals are formed without prior knowledge of characteristics of the inband signals and without obtaining a copy of any of the inband signals from any source other than the received signal.