


1/1

図1

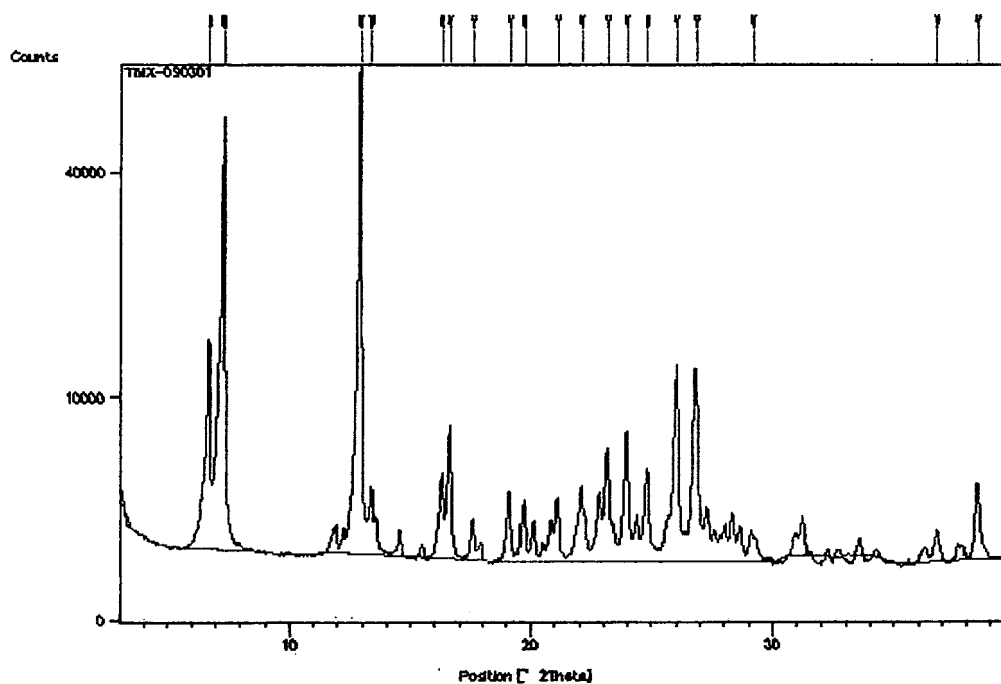

ピークリスト

Pos.[°2Th.]	NET強度[cts]	FWHM[° 2Th.]	d-spacing[Å]	相対強度[%]
6.7172	14698.42	0.0669	13.15922	24.33
7.3031	49028.04	0.0836	12.10474	81.15
12.9335	60413.65	0.0836	6.84505	100.00
13.3926	2699.66	0.0836	6.61145	4.47
16.2766	3580.13	0.1171	5.44589	5.93
16.6186	6872.47	0.1004	5.33459	11.38
17.5918	1368.28	0.1338	5.04160	2.26
19.1391	2575.99	0.1338	4.63737	4.26
19.7047	2245.86	0.0836	4.50552	3.72
21.1033	2308.52	0.1171	4.20997	3.82
22.0856	2385.00	0.2676	4.02489	3.95
23.1375	5119.95	0.1004	3.84423	8.47
23.9359	6454.61	0.1338	3.71778	10.68
24.8151	3939.06	0.1338	3.58802	6.52
25.9976	12382.36	0.1506	3.42744	20.50
26.8063	12034.96	0.1673	3.32585	19.92
29.1541	770.01	0.3346	3.06314	1.27
36.7951	893.27	0.2676	2.44270	1.48
38.4654	3024.85	0.1171	2.34039	5.01