

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
29 December 2004 (29.12.2004)

PCT

(10) International Publication Number
WO 2004/113219 A2

(51) International Patent Classification⁷: **B66B 11/08**

(21) International Application Number:
PCT/JP2004/008672

(22) International Filing Date: 15 June 2004 (15.06.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2003-173582 18 June 2003 (18.06.2003) JP

(71) Applicant (for all designated States except US):
TOSHIBA ELEVATOR KABUSHIKI KAISHA
[JP/JP]; 5-27, Kitashinagawa 6-chome, Shinagawa-ku,
Tokyo 1410001 (JP).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **OSADA, Akira**
[JP/JP]. **HIRUMA, Noboru** [JP/JP].


(74) Agents: **SUZUYE, Takehiko** et al.; c/o **SUZUYE & SUZUYE**, 7-2, Kasumigaseki 3-chome, Chiyoda-ku, Tokyo 1000013 (JP).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,

[Continued on next page]

(54) Title: SHEAVE FOR ELEVATOR

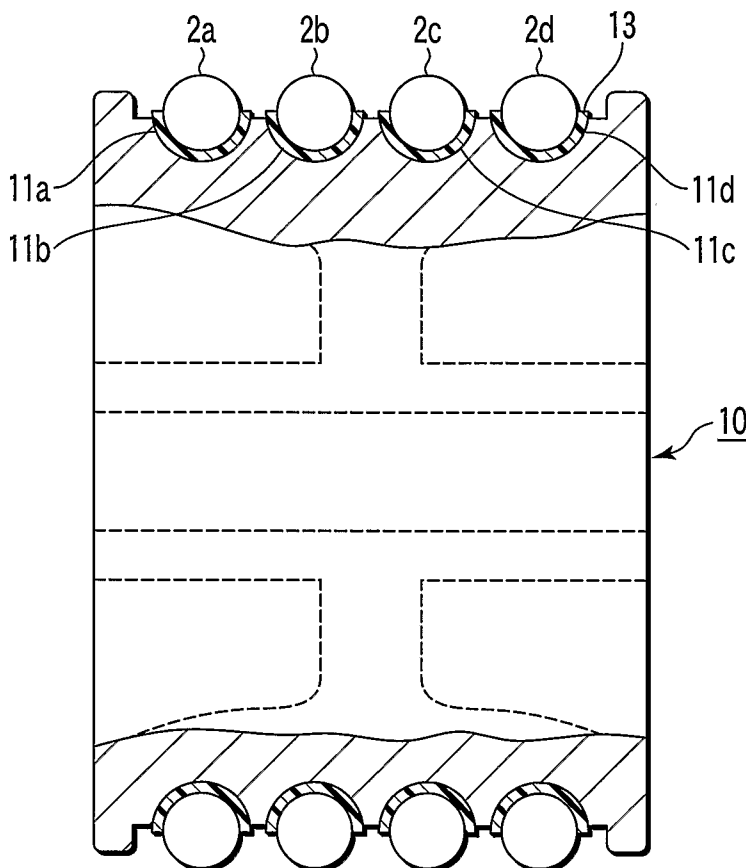

(57) Abstract: Coating layers of low-friction coating materials helping a rotating action generated on ropes are provided on surfaces of grooves formed on an outer peripheral surface of a base of a sheave. Thus, difference in tension between the ropes can be solved, generation of twist on the ropes can be prevented, and deterioration of portions of the ropes which are in contact with the sheave can be prevented to extend the lifetime of the ropes.

WO 2004/113219 A2



SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

- *without international search report and to be republished upon receipt of that report*