* NO COVER LETTER

IPOS COPY + IPER + Annexes + Replacement sheets

RECEIVED 12 MAY 1998 PATENT OFFICE

PCT WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : G11B 33/14	A1	(11) International Publication Number: WO 97/10597
		(43) International Publication Date: 20 March 1997 (20.03.97)

(21) International Application Number: PCT/US96/14473

(22) International Filing Date: 10 September 1996 (10.09.96)

(30) Priority Data:

60/003,758	14 September 1995 (14.09.95)	US
08/703,227	6 September 1996 (06.09.96)	US

(71) Applicant: IOMEGA CORPORATION [US/US]; 1821 West 4000 South, Roy, UT 84067 (US).


(72) Inventors: PATTERSON, Robert, S.; 2703 Hill Drive, Ogden, UT 84403 (US). RICH, Edward, L.; 5173 Old Post Road, Ogden, UT 84403 (US).

(74) Agents: KURTZ, Richard, E. et al.; Woodcock Washburn Kurtz Mackiewicz & Norris, 46th floor, One Liberty Place, Philadelphia, PA 19103 (US).

(81) Designated States: CA, JP, SG, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Published
With international search report.

(54) Title: DISK DRIVE HAVING A SEAL TO ELIMINATE CONTAMINATION

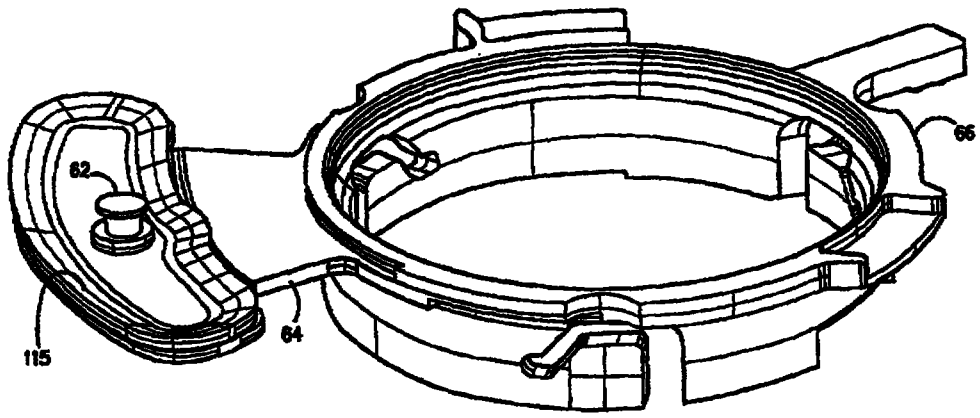

(57) Abstract

A seal (115) is coupled to a movable member in a disk drive for sealing an opening in a chassis over which the movable member passes. The seal comprises a first layer of foam attached to the movable member, and a second layer of low-friction plastic attached to the layer of foam. The foam layer presses the plastic against the chassis to seal the opening as the plastic layer slides over a surface of the chassis.