

(12) 按照专利合作条约所公布的国际申请

(19) 世界知识产权组织
国际局



(10) 国际公布号
WO 2025/113213 A1

(43) 国际公布日
2025 年 6 月 5 日 (05.06.2025)

(51) 国际专利分类号:
H04W 4/12 (2009.01)

(21) 国际申请号: PCT/CN2024/132482

(22) 国际申请日: 2024 年 11 月 15 日 (15.11.2024)

(25) 申请语言: 中文

(26) 公布语言: 中文

(30) 优先权:
202311663306.0 2023年12月1日 (01.12.2023) CN

(71) 申请人: 华为技术有限公司 (HUAWEI TECHNOLOGIES CO., LTD.) [CN/CN]; 中国广东省深圳市龙岗区坂田华为总部办公楼 518129 (CN)。

(72) 发明人: 章晨宇 (ZHANG, Chenyu); 中国广东省深圳市龙岗区坂田华为总部办公楼 518129 (CN)。许胜锋 (XU, Shengfeng); 中国广东省深圳市龙岗区坂田华为总部办公楼 518129 (CN)。

(74) 代理人: 北京同达信恒知识产权代理有限公司 (TDIP & PARTNERS); 中国北京市西城区裕民路 18 号北环中心 A 座 2002 100029 (CN)。


(81) 指定国(除另有指明, 要求每一种可提供的国家保护): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, MG, MK, MN, MU, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW。

(84) 指定国(除另有指明, 要求每一种可提供的地区保护): ARIPO (BW, CV, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SC, SD, SL, ST, SZ, TZ, UG, ZM, ZW), 欧亚 (AM, AZ, BY, KG, KZ, RU, TJ, TM), 欧洲 (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, ME, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG)。

本国际公布:
— 包括国际检索报告(条约第 21 条(3))。

(54) Title: COMMUNICATION METHOD AND APPARATUS

(54) 发明名称: 一种通信方法及装置

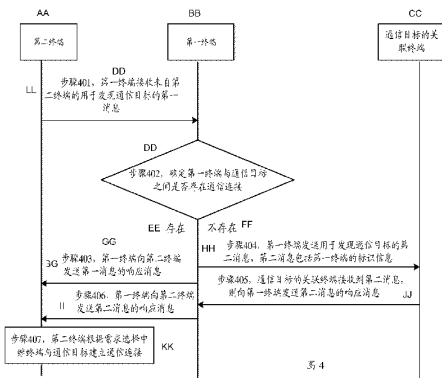

AA Second terminal
BB First terminal
CC Terminal associated with a communication target
DD Step 402, determine whether there is a communication connection between the first terminal and the communication target
EE Yes
FF No
GG Step 403, the first terminal sends a response message of the first message to the second terminal.
HH Step 404, the first terminal sends a second message configured to discover the communication target, wherein the second message comprises identification information of the first terminal
JJ Step 405, if the terminal associated with the communication target receives the second message, the terminal sends the response message of the second message to the first terminal
KK Step 407, the second terminal selects a relay terminal on the basis of requirements to establish a communication connection with the communication target
LL Step 401, the first terminal receives a first message from the second terminal that is configured to discover the communication target

(57) Abstract: The present application relates to the technical field of communications and provides a communication method and apparatus. A first terminal receives a first message from a second terminal that is configured to discover a communication target; and if there is a communication connection between the first terminal and the communication target, a response message of the first message is sent to the second terminal. In the present application, if the first terminal determines that there is the communication connection between same and the communication target, the first terminal no longer broadcasts to the other terminals the message configured to discover the communication target, but directly sends the response message to the second terminal, thereby preventing the waste of signaling resources from being caused by sending unnecessary broadcast messages for discovering the communication target.

(57) 摘要: 本申请提供一种通信方法及装置, 涉及通信技术领域, 第一终端接收来自第二终端的用于发现通信目标的第一消息; 若第一终端与通信目标之间存在通信连接, 则向第二终端发送第一消息的响应消息。本申请中, 第一终端确定与通信目标之间存在通信连接, 则不在向其他终端广播用于发现通信目标的消息, 直接向第二终端发送响应消息, 避免发送不必要的广播发现通信目标的消息, 造成信令资源的浪费。

WO 2025/113213 A1