



- (51) **International Patent Classification:**
G01J 3/02 (2006.01) *G01N 21/65* (2006.01)
G01J 3/44 (2006.01)
- (21) **International Application Number:**
PCT/SG2022/050637
- (22) **International Filing Date:**
01 September 2022 (01.09.2022)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
10202109715X 06 September 2021 (06.09.2021) SG
- (71) **Applicant: NATIONAL UNIVERSITY OF SINGAPORE** [SG/SG]; 21 Lower Kent Ridge Road, Singapore 119077 (SG).
- (72) **Inventor: ZHOU, Guangya**; c/o National University of Singapore, Faculty of Engineering, Department of Mechanical Engineering, 21 Lower Kent Ridge Road, Singapore 119077 (SG).
- (74) **Agent: VIERING, JENTSCHURA & PARTNER LLP**; P.O. Box 1088, Rochor Post Office, Rochor Road, Singapore 911833 (SG).

(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(54) **Title:** SPECTROMETER AND METHOD OF DETECTING A SPECTRUM

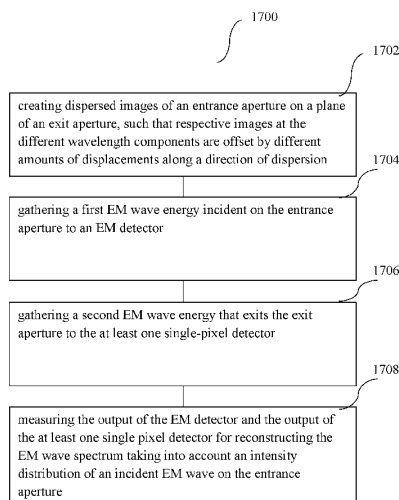


Figure 17

(57) **Abstract:** A spectrometer for detecting an electromagnetic (EM) wave spectrum having one or more wavelength components within a spectral band of interest, a method of detecting an electromagnetic (EM) wave spectrum having one or more wavelength components within a spectral band of interest, and a method of constructing the spectrometer. The method comprises the steps of creating dispersed images of an entrance aperture on a plane of an exit aperture, such that respective images at the different wavelength components are offset by different amounts of displacements along a direction of dispersion; gathering a first EM wave energy incident on the entrance aperture to an EM detector; gathering a second EM wave energy that exits the exit aperture to the at least one single-pixel detector; and measuring the output of the EM detector and the output of the at least one single pixel detector for reconstructing the EM wave spectrum taking into account an intensity distribution of an incident EM wave on the entrance aperture.

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

(88) Date of publication of the international search report:

19 May 2023 (19.05.2023)