



- (51) **International Patent Classification:**
H04W 24/10 (2009.01) *H04W 36/00* (2009.01)
- (21) **International Application Number:**
PCT/IB2024/060829
- (22) **International Filing Date:**
01 November 2024 (01.11.2024)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
63/602,487 24 November 2023 (24.11.2023) US
- (71) **Applicant:** **NOKIA TECHNOLOGIES OY** [FI/FI];
Karakaari 7, 02610 Espoo (FI).
- (72) **Inventors:** **GOYAL, Sanjay**; 600-700 Mountain Avenue,
Murray Hill, New Jersey 07974-0636 (US). **KOSKELA,**
Timo; Kaapelitie 4 (Rusko I), 90620 Oulu (FI).
- (81) **Designated States** (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,

CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG,
KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY,
MA, MD, MG, MK, MN, MU, MW, MX, MY, MZ, NA,
NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO,
RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH,
TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS,
ZA, ZM, ZW.

- (84) **Designated States** (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, CV,
GH, GM, KE, LR, LS, MW, MZ, NA, RW, SC, SD, SL, ST,
SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ,
RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ,
DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT,
LU, LV, MC, ME, MK, MT, NL, NO, PL, PT, RO, RS, SE,
SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, KM, ML, MR, NE, SN, TD, TG).

- (54) **Title:** CHANNEL STATE INFORMATION REPORTING PRIORITY FOR LOWER-LAYER TRIGGERED MOBILITY

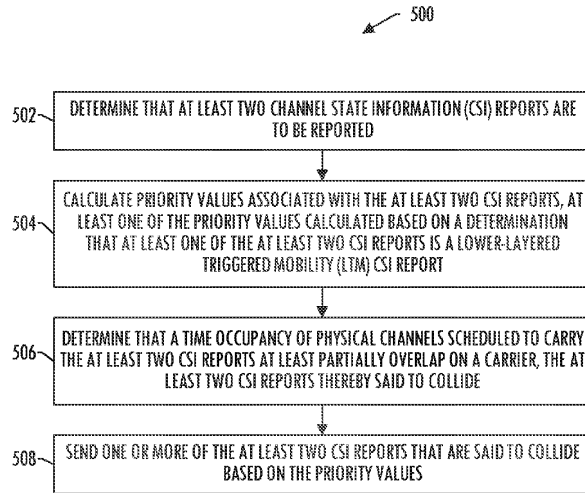


FIG. 5

- (57) **Abstract:** A method is provided that includes determining that at least two channel state information (CSI) reports are to be reported. The method includes calculating priority values associated with the at least two CSI reports, at least one of the priority values calculated based on a determination that at least one of the at least two CSI reports is a lower-layered triggered mobility (LTM) CSI report. The method includes determining that a time occupancy of physical channels scheduled to carry the at least two CSI reports at least partially overlap on a carrier, the at least two CSI reports thereby said to collide. And the method includes sending one or more of the at least two CSI reports that are said to collide based on the priority values.



Published:

- *with international search report (Art. 21(3))*
- *in black and white; the international application as filed contained color or greyscale and is available for download from PATENTSCOPE*