



(51) International Patent Classification:
A61B 17/70 (2006.01)

(21) International Application Number:
PCT/PL2010/000101

(22) International Filing Date:
6 October 2010 (06.10.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
P-389241 9 October 2009 (09.10.2009) PL

(71) Applicant (for all designated States except US): **LFC SPÓŁKA Z O.O.** [PL/PL]; ul. Koźuchowska 41, PL-65-364 Zielona Góra (PL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **CIUPIK, Lechostaw Franciszek** [PL/PL]; ul. Koźuchowska 41, PL-65-364 Zielona Góra (PL). **KIERZKOWSKA, Agnieszka** [PL/PL]; ul. Kolejowa 10/6, PL-59-100 Polkowice (PL).

(74) Common Representative: **CIUPIK, Lechostaw Franciszek**; ul. Koźuchowska 41, PL-65-364 Zielona Góra (PL).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: UNLOADING-DYNAMIC INTERVERTEBRAL DEVICE

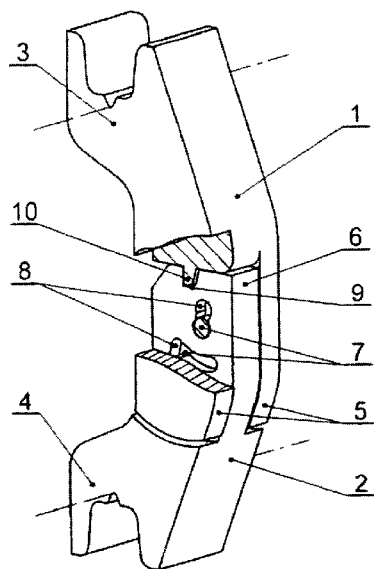


Fig. 1

(57) Abstract: The scope of the invention is an unloading-dynamic intervertebral device consisting of two bars (1,2) cooperating with each other, where each of them is ended from one side with a shaped bearing (3,4) for bony elements of the spine. One of the bars (1,2) is provided with a guide-line (5), whereas the other with a guide (6), moreover, the first bar (1,2) is provided with at least one tang (7), situated in the corresponding shaped gap (8) of the other bar (2,1), assuring rotatable and rotatable-sliding co-operation of the bars (1,2) crossing in the open position of the device. The device is equipped with a mechanism blocking rotational movement of the bars (1,2) in the closed position.

**Declarations under Rule 4.17:**

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

— *of inventorship (Rule 4.17(iv))*

Published:

— *with international search report (Art. 21(3))*