


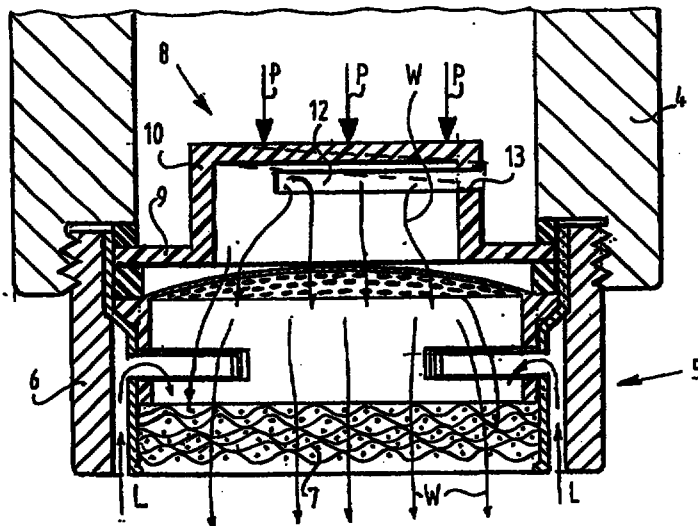

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 7 : G05D 7/01, E03C 1/084	A1	(11) International Publication Number: WO 00/31601 (43) International Publication Date: 2 June 2000 (02.06.00)
(21) International Application Number: PCT/EP99/09032 (22) International Filing Date: 12 November 1999 (12.11.99) (30) Priority Data: 1010592 19 November 1998 (19.11.98) NL (71)(72) Applicant and Inventor: KIPPING, Cornelis, Maria [NL/NL]; Bergkampweg 6, NL-7231 CM Warnsveld (NL). (74) Agent: PRINS, Hendrik, Willem; Arnold & Siedsma, Sweel- inckplein 1, NL-2517 GK The Hague (NL).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i>

(54) Title: FLOW LIMITER**(57) Abstract**

The invention relates to a device (8) for arranging in a liquid conduit for limiting a liquid flow in this conduit, which device comprises a base part (9, 10) with a through-flow opening and a closing part which is arranged on the base part via spring means and which is displaceable with at least a substantial axial component for partially closing the through-flow opening against a closing surface (13) on the base part, wherein the device can be fixed at a fixed position in the conduit by means of fixation means such that the liquid can pass through the device only via the through-flow opening and wherein the base part and the closing part (13) are arranged relative to each other such that in a rest position defined by the spring means a gap (12) is formed between the base part and the closing part, which gap is made smaller counter to the spring action by bending under the influence of the liquid pressure difference over the device.