



(51) International Patent Classification:

F02C 7/00 (2006.01) *F01D 5/18* (2006.01)
F02C 9/00 (2006.01) *F01D 25/12* (2006.01)
F02C 7/12 (2006.01) *F02K 3/00* (2006.01)

(21) International Application Number:

PCT/US2013/026073

(22) International Filing Date:

14 February 2013 (14.02.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicant: **UNITED TECHNOLOGIES CORPORATION** [US/US]; One Financial Plaza, Hartford, CT 06101 (US).

(72) Inventors: **PROPHETER-HINCKLEY, Tracy, A.**; 44 Oak Forest Dr., Manchester, CT 06042 (US). **THOMAS, Peter Holman**; 291 Ocean Drive, #07-13, 098532 Singapore (SG).

(74) Agent: **BARRETT, Todd, W.**; Carlson, Gaskey & Olds/Pratt & Whitney, c/o CPA Global, P.O. Box 52050, Minneapolis, MN 55402 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: GAS TURBINE ENGINE COMPONENT HAVING SURFACE INDICATOR

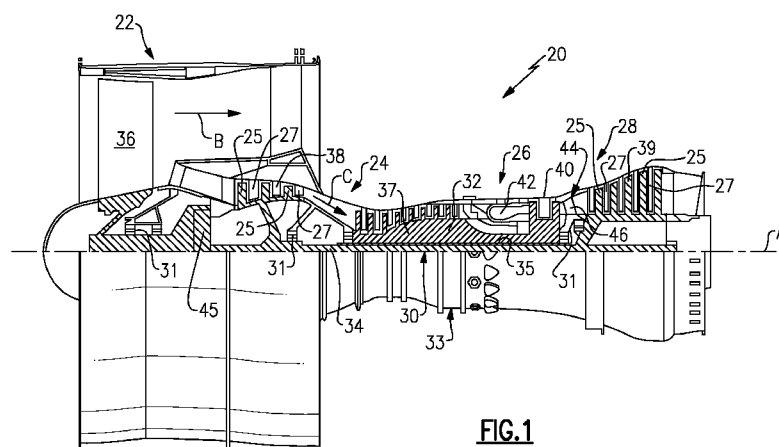


FIG.1

(57) Abstract: A component for a gas turbine engine according to an exemplary aspect of the present disclosure includes, among other things, a body portion, a cooling circuit disposed within the body portion and including at least a first cavity, a core in fluid communication with the first cavity, and an exit surface that extends through an exterior surface of the body portion. At least one surface indicator is visible near the exit surface.