



(51) International Patent Classification:

H05B 37/02 (2006.01) *G01B 11/26* (2006.01)
G01B 11/00 (2006.01)

(21) International Application Number:

PCT/JP2014/059055

(22) International Filing Date:

20 March 2014 (20.03.2014)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2013-126003 14 June 2013 (14.06.2013) JP

(71) Applicant: **KABUSHIKI KAISHA TOSHIBA** [JP/JP];
1-1, Shibaura 1-chome, Minato-ku, Tokyo, 1058001 (JP).

(72) Inventors: **YAMAZAKI, Masaki**; c/o Intellectual Property Division, Toshiba Corporation, 1-1, Shibaura 1-chome, Minato-ku, Tokyo, 1058001 (JP). **ITO, Satoshi**; c/o Intellectual Property Division, Toshiba Corporation, 1-1, Shibaura 1-chome, Minato-ku, Tokyo, 1058001 (JP). **WATANABE, Tomoki**; c/o Intellectual Property Division, Toshiba Corporation, 1-1, Shibaura 1-chome, Minato-ku, Tokyo, 1058001 (JP). **KOZAKAYA, Tatsuo**; c/o Intellectual Property Division, Toshiba Corporation, 1-1, Shibaura 1-chome, Minato-ku, Tokyo, 1058001 (JP). **OKADA, Ryuzo**; c/o Intellectual Property Division, Toshiba Corporation, 1-1, Shibaura 1-chome, Minato-ku, Tokyo, 1058001 (JP).


(74) Agent: **SAKAI, Hiroaki**; Sakai International Patent Office, Kasumigaseki Building, 2-5, Kasumigaseki 3-chome, Chiyoda-ku, Tokyo, 1006020 (JP).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

[Continued on next page]

(54) Title: IDENTIFICATION DEVICE, METHOD, AND COMPUTER PROGRAM PRODUCT

FIG.1

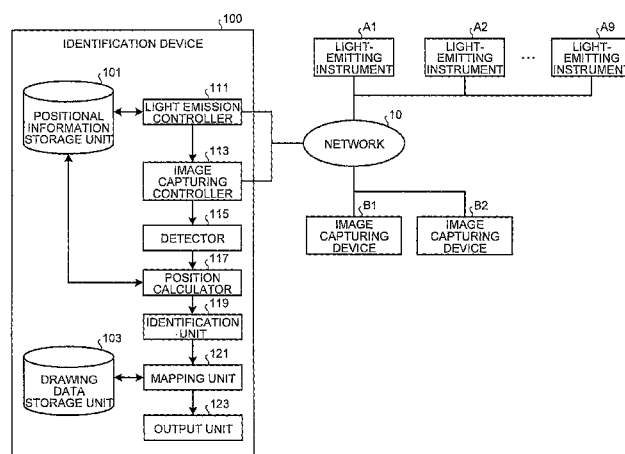

(57) Abstract: According to an embodiment, an identification device includes a light emission controller, an image capturing controller, a detector, a position calculator, and an identification unit. The light emission controller individually controls lighting on/off of light-emitting instruments via a network. The image capturing controller controls capturing devices by using identification information of the image capturing devices, and obtains an image sequence captured by each image capturing device. The detector detects, for each image sequence, one or more regions varying in conjunction with lighting on/off of the light-emitting instruments. The position calculator calculates, for each image sequence, a position of the image capturing device that captures the image sequence by using a position of the light-emitting instrument performing lighting on/off causing each region. The identification unit identifies each image capturing device specified by the calculated position and each image capturing device specified by the identification information.



(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,

SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*