



(51) International Patent Classification:
H04L 27/00 (2006.01)

(21) International Application Number:
PCT/CN2017/087629

(22) International Filing Date:
08 June 2017 (08.06.2017)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant: **QUALCOMM INCORPORATED** [US/US];
ATTN: International IP Administration, 5775 Morehouse
Drive, San Diego, CA 92121-1714 (US).

(72) Inventors; and

(71) Applicants (for US only): **WU, Liangming** [CN/CN];
5775 Morehouse Drive, San Diego, CA 92121-1714 (US).
ZHANG, Yu [CN/CN]; 5775 Morehouse Drive, San Diego,
CA 92121-1714 (US). **CHEN, Wanshi** [CN/US]; 5775
Morehouse Drive, San Diego, CA 92121-1714 (US).

(74) Agent: **NTD PATENT & TRADEMARK AGENCY
LIMITED**; 10th Floor, Tower C, Beijing Global Trade
Center, 36 North Third Ring Road East, Dongcheng Dis-
trict, Beijing 100013 (CN).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN, KP, KR,
KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,

(54) Title: PMI FEEDBACK FOR TYPE II CSI FEEDBACK IN NR-MIMO

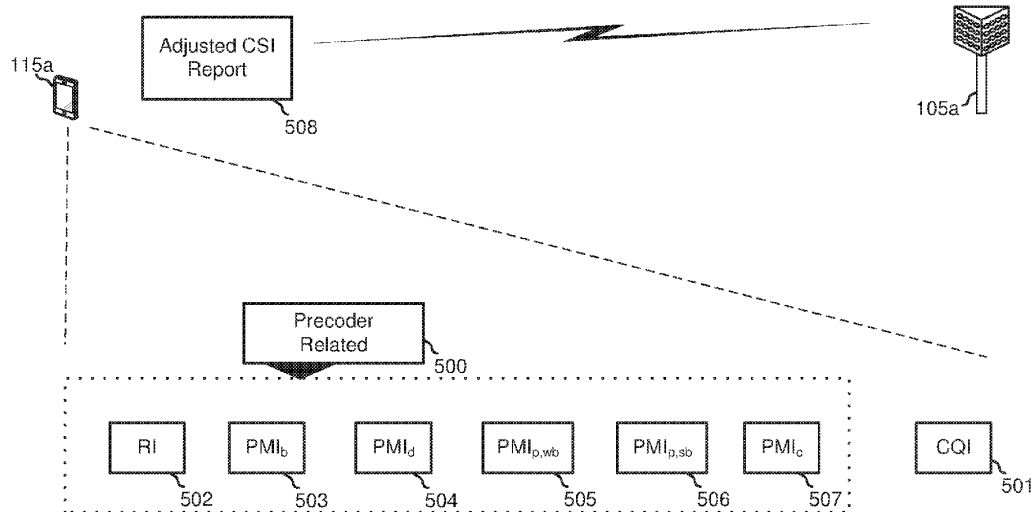


FIG. 5

(57) Abstract: Precoding matrix indicator (PMI) feedback for Type II channel state information (CSI) feedback in new radio (NR) multiple input, multiple output (MIMO) operations is discussed. According to various aspects, a user equipment (UE) determines a plurality of CSI feedback components and identifies a set of discarded ones of these components based on a particular component value of a precoding matrix indicator (PMI) component. The UE may then generate an adjusted CSI report by adjusting how the discarded feedback components are treated. The resulting adjusted CSI report may then be transmitted to a serving base station.

[Continued on next page]

EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— *of inventorship (Rule 4.17(iv))*

Published:

— *with international search report (Art. 21(3))*