

(19) World Intellectual Property Organization
International Bureau



G00002

(43) International Publication Date
29 August 2002 (29.08.2002)

PCT


(10) International Publication Number
WO 02/066773 A1

- (51) International Patent Classification⁷: **E05B 19/06**, 27/04
- (21) International Application Number: PCT/US02/02211
- (22) International Filing Date: 28 January 2002 (28.01.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
09/776,929 6 February 2001 (06.02.2001) US
09/981,801 19 October 2001 (19.10.2001) US
- (71) Applicant (for all designated States except US):
MEDECO SECURITY LOCKS, INC. [US/US];
P.O. Box 3075, Salem, VA 24153-0330 (US).
- (72) Inventors; and
(75) Inventors/Applicants (for US only): **FIELD, Peter, H.** [US/US]; P.O. Box 104, Salem, VA 24153 (US).
PERKINS, Andy, E. [US/US]; 2401 Gardner Street, Lafayette, VA 24087 (US).
- (74) Agents: **ROTHWELL, G., Franklin et al.**; Rothwell, Figg, Ernst & Manbeck, P.C., 1425 K Street, N.W., Suite 800, Washington, DC 20005 (US).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**
— with international search report
— with amended claims
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.



162162

(54) Title: ROTATING PIN TUMBLER SIDE BAR LOCK WITH SIDE BAR CONTROL

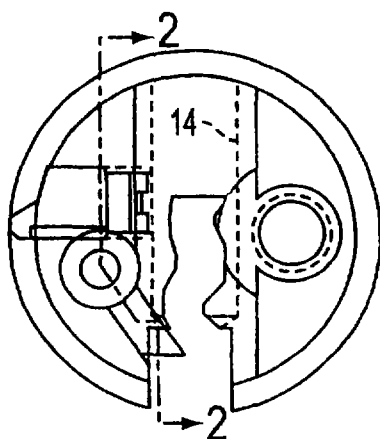

(57) Abstract: A twisting tumbler lock with a side bar (16,16') is provided with additional levels of security by a axially reciprocable slider (24,24') which is normally positioned to block operation of the side bar (16,16') but is moved by a specially configured key (34,34') to free operation of the side bar (16,16'). This provides a third level of locking security, it also allows master keying. The unique key (34,34') has a portion of a rib (40) formed to cooperate with the slider (24,24') to further allow key control.

WO 02/066773 A1