



- (51) **International Patent Classification:**
A47J 31/40 (2006.01) *A47J 31/46* (2006.01)
- (21) **International Application Number:**
PCT/EP2012/075212
- (22) **International Filing Date:**
12 December 2012 (12.12.2012)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
11193789.2 15 December 2011 (15.12.2011) EP
- (71) **Applicant:** NESTEC S.A. [CH/CH]; Av. Nestlé 55, CH-1800 Vevey (CH).
- (72) **Inventors:** REY, Cédric; Rue du Chêne 36, CH-1315 La Sarraz (CH). CALDERONE, Roberto, Angelo; Rue du Grand Pont 3, CH-1350 Orbe (CH). SCORRANO, Lucio; Chemin de Jolimont 9, CH-1400 Yverdon-les-Bains (CH).
- (74) **Agent:** DUCREUX, Marie; Avenue Nestlé 55, CH-1800 Vevey (CH).
- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,

HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Published:

- with international search report (Art. 21(3))

(54) **Title:** BEVERAGE DISPENSER WITH IMPROVED OUTLET TUBES ASSEMBLY

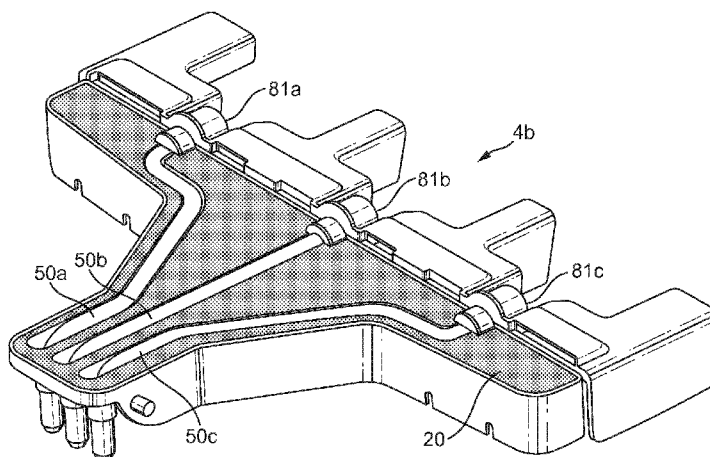


FIG. 5

(57) **Abstract:** The invention concerns a beverage dispenser comprising : at least one beverage ingredient processing assembly (1a, 1b, 1c) presenting one outlet (2a, 2b, 2c) for evacuating a beverage, at least one conduit (8a, 8b, 8c) removably connected to the outlet (2a, 2b, 2c) of the at least one beverage ingredient processing assembly for dispensing the beverage in a container (9), wherein: the dispenser comprises a drawer assembly (3) comprising a drawer (4) composed of an upper part (4a) and a lower part (4b), said both parts being at least partly removable one from the other, at least one of said parts presenting at least one groove (50a, 50b, 50c, 51a, 51b, 51c) on its internal surface so that when the two parts are connected together the at least one groove forms at least a part of the least one conduit (8a, 8b, 8c) for dispensing the beverage from the beverage ingredient processing assembly outlet (2a, 2b, 2c) to the container (9), and the upper part (4a) and the lower part (4b) of the drawer assembly are made of a first hard material, and a second soft polymer material (20) covers the upper part (4a) and/or the lower part (4b) at least on the area near from the edges of the at least one conduit (8a, 8b, 8c) formed by the at least one groove, and the drawer assembly (3) comprises a cover (6) for maintaining and squeezing the upper part and the lower part one against the other.

