

(51) International Patent Classification:
B65G 17/24 (2006.01)(21) International Application Number:
PCT/US2011/037203(22) International Filing Date:
19 May 2011 (19.05.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
12/816,066 15 June 2010 (15.06.2010) US(71) Applicant (for all designated States except US):
LAITRAM, L.L.C. [US/US]; Legal Department, 200
Laitram Lane, Harahan, Louisiana 70123 (US).

(72) Inventor; and

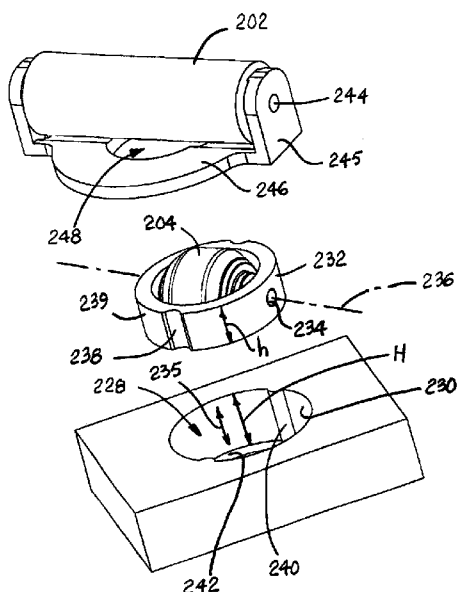
(75) Inventor/Applicant (for US only): RAU, Brien G. [US/
US]; 826 Newman Avenue, Jefferson, Louisiana 70121
(US).(74) Agent: CRONVICH, James T.; LAITRAM, L.L.C., 200
Laitram Lane, Harahan, Louisiana 70123 (US).(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG,
ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

[Continued on next page]

(54) Title: CONVEYOR BELT WITH WEAR-TOLERANT STACKED ROLLERS

**FIG. 14**

(57) Abstract: A conveyor belt having multiple roller sets, each roller set including a first roller (204) and a second roller (202), the first roller (204) being movable into contact with the second roller (202) so that driving of one of the rollers in a first angular direction causes rotation of the other roller in a second, opposite angular direction. The invention also relates to the module of the belt itself and the conveyor comprising a belt with a plurality of such modules and a bearing surface that makes the first roller (204) rotate and move towards the second roller (202).



Published:

— *with international search report (Art. 21(3))*